

Datasheet


CAA-110P - CENTAUR Lock Control Module

Product Description

The CAA-110P greatly reduces installation time and simplifies the connection of electro-magnetic locks when used alone or in conjunction with door strikes and CENTAUR access control controllers.

This lock control module consists of two onboard, heavy-duty 12V relays and two relay activation LED indicators. The relays, which are used to control power to the electro-magnetic locks, are toggled by the activation of the controller's lock output terminals.

The CAA-110P can also be connected to a fire alarm system, to ensure instant unlocking in case of a fire.

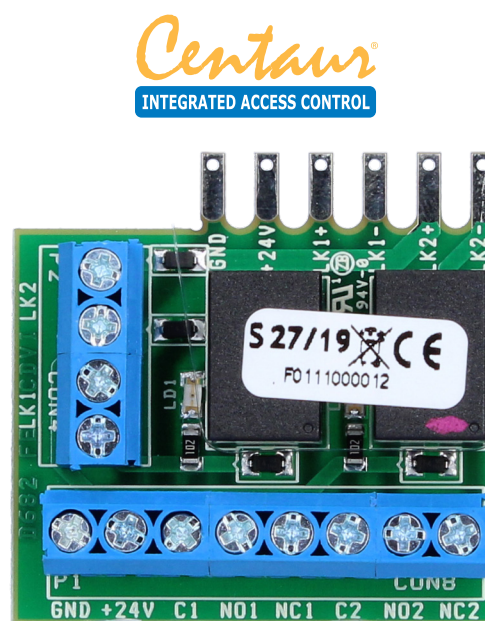

Key Features

- Simplifies the installation of dual-locking doors
- Directly plugs into the CTV900A CENTAUR controller's lock outputs
- No external power source required
- 2 relay lock outputs
- 2 relay status LED indicators (green)

 Certification


 DEEE

RoHS Certification

 0°C to 49°C

Product Specifications

Connection:	Directly plugs into the CTV900A lock terminal
Inputs:	2 x N.C. alarm input contacts (305m using 22 AWG pair)
Relays:	2 x form C Relays: 12 Vdc, 5A contact rating (with diode flyback protection)
Weight:	0.04 kg

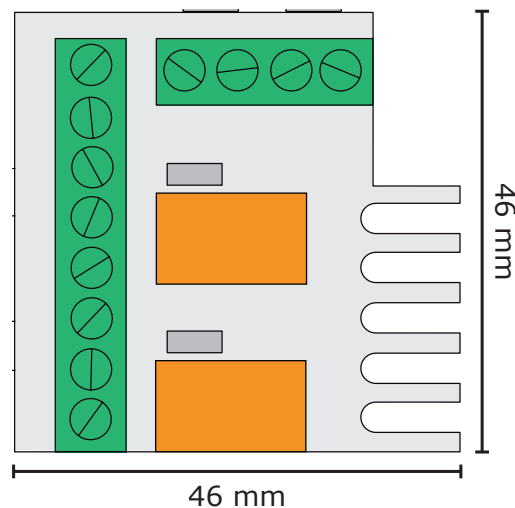

Electrical Specifications

Power input:	12 Vdc
Consumption:	100 mA @ 12 Vdc