Rolling Center UK

INNOVATIVE SOLUTIONS FOR METAL GATES AND DOORS

2018 TRADE CATALOGUE

TEL. 0113 201 6677
INFO@ROLLINGCENTER.CO.UK
WWW.**ROLLINGCENTER.**CO.UK

Rolling Center UK are a leading gate hardware supplier within the UK. We also stock a wide and diverse range of gate automation, barriers, safety products, intercoms, access control, aluminium gates and gate & barrier systems.

This catalogue is an introduction to our best selling lines. To view the full range visit www.Rollingcenter.Co.Uk. This year we have added many new products to the range including new high speed gate kits from nice, the new rolling center super silent cantilever kits and new access control products.

At Rolling Center UK, we are dedicated to providing excellent customer service and will always go that extra mile for you. So if you can't see what you are looking for please let us know and we will do all we can to help.

Our technical support team offer free pre and post sales technical advice.

Contact us or register online if you would like our competitive trade pricing or would like to place an order.

Thank you for your continued support.

What we offer:

- Next day delivery - We have a large stock holding of a wide range of products available for next day delivery throughout the UK
- Pre and post sales technical support – Call us for advice from our experienced team
- Trade counter – Visit our central Leeds warehouse, just off Junction 6, M621 if you wish to view and discuss products before purchase
- Demonstration products - We have a range of demonstration products available to view before you buy
- Training – In house training from our experienced technical team is available by appointment
- Offers – We offer regular promotions on key products
- Price list – Available at request but speak to us for bespoke quotes
- DHF courses – We regularly run DHF safety training courses to all our customers.

Tel: **0113 2016677**
Email: **Info@rollingcenter.co.uk**

4 - NICE / High Speed Kits
6- NICE / Sliding Gate Kits / Gear Rack
7 - NICE / Above Ground Gate Kits
8 - NICE / Articulated Gate Kits
9 - NICE / Underground Gate Kits
10 - NICE / WIFI Interface, Radio Controls &/ Barrier Kits
12 - BENINCA / Sliding / Above Ground Gate Kits
13 - BENINCA / Underground Gate Kits
14 - BENINCA / Underground / Hydraulic Gate Kits
15 - BENINCA / Accessories / **RISE** / Electromechanical Bollard Kits
16 - SAFETY PRODUCTS
17 - ASO / Safety Edges / Accessories
19 - CONTROLLERS / **PSU'S** / **LOOP DETECTORS** & **RELAYS**
20 - KEYPADS / **BUTTONS** / **GSM SWITCHES** / **TIME CLOCKS**
21 - PROXIMITY KITS / **ENCLOSURES** / **DOOR LOOPS** & **CABLES**
22 - VIDEX / Audio & Video Intercoms / Monitors
23 - VIDEX / Proximity / GSM / 2 Way Video / IP System Intercoms
24 - VIDEX / IP System Intercoms / Intercom Posts
25 - CDVI / Intercoms / **DAITEM** Intercoms / **AES** Wireless Audio Intercoms
26 - AES / Wireless Audio Intercoms / GSM / Smart
27 - AES / 4G Predator GSM Video Intercoms
28 - AES / WIFI Predator 2 GSM Video Intercoms
29 - LOCINOX / Locks & Mag Locks
30 - LOCINOX / Closers / **BORG** / Locks / **CDVI** / Mag Locks
31 - ROLLING CENTER / Swing Gate Hardware
32 - ROLLING CENTER / Swing & Sliding Gate Hardware
33 - ROLLING CENTER / Sliding Gate Hardware
34 - ROLLING CENTER / H900 antilever Gate Hardware
35 - ROLLING CENTER / Cantilever & Super Silent Gate Hardware
37 - ROLLING CENTER / Super Silent Gate Hardware & Accessories
38 - LA TOULOUSAINE / Aluminium Gates
42 - ROLLING CENTER / Composite Wood
43 - ROLLING CENTER / Gate & Barrier Systems

NICE HIGH SPEED SLIDING & SWING GATE KITS

NEW

x1

x2

x1

x1

AVAILABLE KITS:

24V DC
600kg

ROBUS500HS (GATES UP TO 500KG)
1 x RB500HS Operator
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

RECOMMENDED TO BE USED WITH ROLLING CENTER SUPER SILENT CANTILEVER GATE SYSTEMS.

IDEAL FOR INTENSIVE USE
opening a 4 m gate takes around 9* seconds with RB500H.

NEW

x1

x2

x1

x1

AVAILABLE KITS:

24V DC
400kg

RUNKIT400HS (GATES UP TO 400KG)
1 x RUN400HS Operator
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

24V DC
1200kg

RUNKIT1200HS (GATES UP TO 1200KG)
1 x RUN1200HS Operator
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

IDEAL FOR INTENSIVE USE
Opening a 4m gate takes around 6* seconds with RUN400HS. Opening a 7m gate takes around 18* seconds with RUN1200HS.

NEW

x1/2

x1

x2

x1

x1

AVAILABLE KITS:

24V DC
5M PER LEAF

TOONA5HSKIT1 (GATES UP TO 5M)
2 x TOONA5024HS Irreversible electromechanical gear motors
1 x MC824H Control panel
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

24V DC
5M PER LEAF

TOONA5HSKIT2 (GATES UP TO 5M)
1 x TOONA5024HS Irreversible electromechanical gear motors
1 x MC824H Control panel
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

QUICK MANOEUVRES
90° opening in about 16* seconds.

NICE HIGH SPEED SLIDING & SWING GATE

NEW

x1/2

x1

x2

x1

x1

AVAILABLE KITS:

TOONA6HSKIT1 (GATES UP TO 6M)

24V DC
6M PER LEAF

2 x TOONA6024HS Irreversible electromechanical gear motors
1 x MC824H Control panel
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

TOONA6HSKIT2 (GATES UP TO 6M)

24V DC
6M PER LEAF

1 x TOONA6024HS Irreversible electromechanical gear motors
1 x MC824H Control panel
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

QUICK MANOEUVRES
90° opening in about 30* seconds.

NEW

x1/2

x1

x2

x1

x1

AVAILABLE KITS:

M-FABHS KIT1 (GATES UP TO 3M)

24V DC
3M PER LEAF

2 x MFAB3024HS Irreversible electromechanical gear motors
2 x MFABBOX Foundation boxes
1 x MC824H Control panel
1 x Pair of EPMB Photocells
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
2 x BMA3 Manual release

M-FABHS KIT2 (GATES UP TO 3M)

24V DC
3M PER LEAF

1 x MFAB3024HS Irreversible electromechanical gear motors
1 x MFABBOX Foundation box
1 x MC824H Control panel
1 x Pair of EPMB Photocells
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
2 x BMA3 Manual release

IDEAL FOR INTENSIVE USE & QUICK MANOEUVRES
90° opening in about 8* seconds.

NEW

L-FABHS KIT1 (GATES UP TO 4M)

24V DC
4M PER LEAF

2 x LFAB4024HS Irreversible electromechanical gear motors
2 x LFABBOX4 Foundation boxes
1 x MC824H Control panel
1 x Pair of EPMB Photocells
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
2 x BMA3 Manual release

NEW

L-FABHS KIT2 (GATES UP TO 4M)

24V DC
4M PER LEAF

1 x LFAB4024HS Irreversible electromechanical gear motors
1 x LFABBOX4 Foundation box
1 x MC824H Control panel
1 x Pair of EPMB Photocells
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
2 x BMA3 Manual release

IDEAL FOR INTENSIVE USE & QUICK MANOEUVRES
90° opening in about 6* seconds.

NICE SLIDING GATE KITS

x1

x2

x1

x1

AVAILABLE KITS:

24V DC
600kg

ROBUSKIT 1 (GATES UP TO 600KG)
1 x RB600 Operator
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

24V DC
600kg

ROBUSKIT 2 (GATES UP TO 600KG)
1 x RB600P Operator **Inductive limits**
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

24V DC
1000kg

ROBUSKIT 3 (GATES UP TO 1000KG)
1 x RB1000 Operator
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

24V DC
1000kg

ROBUSKIT 4 (GATES UP TO 1000KG)
1 x RB1000P Operator **Inductive limits**
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

x1

x2

x1

x1

AVAILABLE KITS:

24V DC
1500kg

RUNKIT1 (GATES UP TO 1500KG)
1 x RUN1500 Operator
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

230V
1800kg

RUNKIT 2 (GATES UP TO 1800KG)
1 x RUN1800 Operator
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

230V
1800kg

RUNKIT 3 (GATES UP TO 1800KG)
1 x RUN1800P Operator **Inductive limits**
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

230V
2500kg

RUNKIT 4 (GATES UP TO 2500KG)
1 x RUN2500 Operator
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

230V
2500kg

RUNKIT 5 (GATES UP TO 2500KG)
1 x RUN2500P Operator **Inductive limits**
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

230V
2500kg

RUNKIT 6 (GATES UP TO 2500KG)
1 x RUN2500I Operator **With Inverter**
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

MOD4 GEAR RACK

63/4
1M 30x20 nylon slotted gear rack with steel core and 3 fixings.

ART 47
1M 30x12 galvanised slotted gear rack with 3 fixings.

ART 47/A2
2M 30x12 galvanised slotted gear rack with 5 fixings.

NICE SLIDING GATE KITS

x1

x2

x1

x1

x1

AVAILABLE KITS:

SLIGHTKIT IS IDEAL FOR SMALL OPENINGS - NAKEDKIT IS DESIGNED TO FIT INSIDE SMALL STEEL POSTS

24V DC
600kg

SLIGHTKIT (GATES UP TO 400KG)

1 x SLH400 Operator
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver
1 x ELB Flashing light

24V DC
400kg

NAKEDKIT (GATES UP TO 400KG)

1 x NKSL400 Operator
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI 4 Channel receiver

NICE ABOVE GROUND GATE KITS


x1/2

x1

x2

x1

x1

AVAILABLE KITS:

SINGLE LEAF KITS ALSO AVAILABLE

230V
3M PER LEAF

TOONAKIT1 (LEAF UP TO 3M)

2 x TO4006 Irreversible electromechanical motors c/w limit switch in opening & closing
1 x A60 Control panel
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
1 x Pair of EPM Photocells

230V
5M PER LEAF

TOONAKIT2 (LEAF UP TO 5M)

2 x TO5016 Irreversible electromechanical motors c/w limit switch in opening & closing
1 x A60 Control panel
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
1 x Pair of EPM Photocells

24V DC
3M PER LEAF

TOONAKIT3 (GATES UP TO 3M)

2 x TO4024 Irreversible electromechanical motors c/w magnetic encoder
1 x MC824H Control panel
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
1 x Pair of EPMB Photocells

24V DC
5M PER LEAF

TOONAKIT4 (LEAF UP TO 5M)

2 x TO5024 Irreversible electromechanical motors c/w magnetic encoder
1 x MC824H Control panel
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
1 x Pair of EPMB Photocells

24V DC
7M PER LEAF

TOONAKIT5 (LEAF UP TO 7M)

2 x TO7024 Irreversible electromechanical motors c/w magnetic encoder
1 x MC824H Control panel
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
1 x Pair of EPMB Photocells

WE STOCK A WIDE RANGE OF AUDIO, VIDEO, GSM & WIRELESS INTERCOMS.

See page **20** for details.

NICE ARTICULATED KITS

x1/2

x2

x1

x1

AVAILABLE KITS:

24V DC
3.5M PER LEAF

HYKEKIT 1 (LEAF UP TO 3.5M)

1 x HK7024 Irreversible articulated arm gear motor c/w control panel
1 x HK7224 Irreversible articulated arm gear motor
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI Plug-in receiver

24V DC
3.5M PER LEAF

HYKEKIT 2 (LEAF UP TO 3.5M)

1 x HK7024 Irreversible articulated arm gear motor c/w control panel
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x OXI Plug-in receiver

NEED ANY SAFETY EQUIPMENT?

We stock a full range of safety edges and accessories to help make your gate compliant.

See pages **15** - **17** for details.

x1/2

x2

x1

x1

x1

AVAILABLE KITS:

24V DC
2.4M PER LEAF

HOPPKIT 1 (LEAF UP TO 2.4M)

1 x HO7124 Electromechanical gear motor c/w control panel & OXI receiver
1 x HO7224 Electromechanical gear motor
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x MLBT Flashing light c/w intergrated aerial

24V DC
2.4M PER LEAF

HOPPKIT 2 (LEAF UP TO 2.4M)

1 x HO7124 Electromechanical gear motor c/w control panel & OXI receiver
2 x ON2E 2 Channel transmitters
1 x Pair of EPMB Photocells
1 x MLBT Flashing light c/w intergrated aerial

NEED ASSISTANCE WITH CHOOSING THE RIGHT KIT?

Call us on **0113 201 6677**.
Our friendly team are here to help.

NICE UNDERGROUND KITS

x1/2

x1

x2

x1

x1

AVAILABLE KITS:

SINGLE LEAF KITS ALSO AVAILABLE

M-FABKIT1 (LEAF UP TO 3M)

230V
3M PER LEAF

2 x ME3100 Electromechanical gear motors
2 x MCEF Foundation boxes c/w cataphoresis
1 x A60 Control panel
1 x Pair of EPM Photocells
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
2 x BMA3 Manual release

M-FABKIT2 (LEAF UP TO 3M)

24V DC
3M PER LEAF

2x ME3124 Irreversible electromechanical gear motors
2 x MCEF Foundation boxes c/w cataphoresis
1 x MC824H Control panel
1 x Pair of EPMB Photocells
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
2 x BMA3 Manual release

NOW AVAILABLE IN HIGH SPEED.

See page **5** for details.

x1/2

x1

x2

x1

x1

AVAILABLE KITS:

SINGLE LEAF KITS ALSO AVAILABLE

L-FABKIT1 (LEAF UP TO 4M)

230V
4M PER LEAF

2 x BM4000 Electromechanical gear motors
2 x BMBOX4 Foundation boxes
1 x A60 Control panel
1 x Pair of EPM Photocells
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
2 x BMA3 Manual release

L-FABKIT2 (LEAF UP TO 4M)

24V DC
4M PER LEAF

2 x BM4024 Irreversible electromechanical gear motors
2 x BMBOX4 Foundation boxes
1 x MC824H Control panel
1 x Pair of EPMB Photocells
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
2 x BMA3 Manual release

TRAINING COURSES...

Did you know that we offer bespoke training courses on all the products that we sell?

BIG-FABKIT1 (LEAF UP TO 5M)

24V DC
5M PER LEAF

2 x BM5024 Irreversible electromechanical gear motors c/w magnetic encoder
2 x BMBOX Foundation boxes
1 x MC824H Control panel
1 x Pair of EPMB Photocells
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
2 x BMA3 Manual release

BIG-FABKIT2 (LEAF UP TO 5M)

24V DC
5M PER LEAF

1 x BM5024 Irreversible electromechanical gear motors c/w magnetic encoder
1 x BMBOX4 Foundation boxes
1 x MC824H Control panel
1 x Pair of EPMB Photocells
2 x ON2E 2 Channel transmitters
1 x OXI 4 Channel receiver
2 x BMA3 Manual release

NEED PRE OR POST SALES TECHNICAL SUPPORT?

Our friendly team are here to help.
Call us on **0113 201 6677**
or email **info@rollingcenter.co.uk**

WIFI INTERFACE

Code	Description
IT4WIFI	**Kit containing:** **1x WI-FI** interface **1x RJ-11** phone cable **1x IBT4N** adapter

Controlling the gate and garage door
by smartphone,
for iOS and Android users.

MyNice
Welcome

Download on the App Store | GET IT ON Google Play

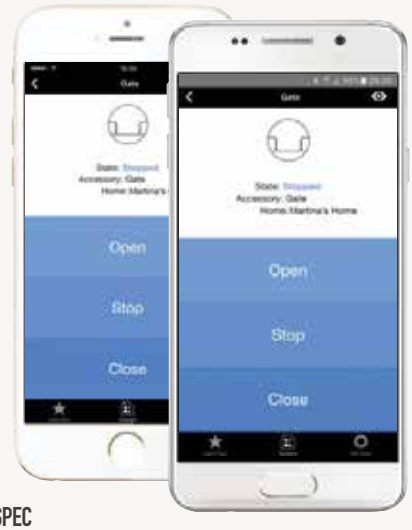

TECHNICAL SPEC

Functions
Commands: open, stop, close, plus one other from among those provided by the automation
Geolocation and other actions are possible thanks to compatibility with the IFTTT service

Requisites
A maximum of 20 users can be associated with the IT4WIFI
iOS 10 or Android 5 operating system or later
Wi-Fi access point supporting Apples Bonjour service

WI-FI INTERFACE ALLOWING CONTROL OF NICE GATE AND GARAGE DOOR AUTOMATIONS COMPATIBLE WITH THE BUST4 (OPERA) PROTOCOL.

EASY TO INSTALL

Using the cable provided, connect the BusT4 socket on the Wi-Fi interface and the BusT4 or IBT4N* socket on the Nice control unit.

Choose whether to use IT4WIFI with the MyNice or Apple HomeKit protocol. Then configure the interface using your smartphone.

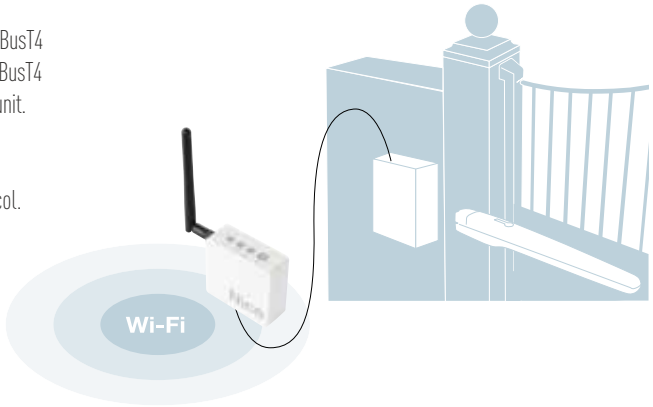

Voltage 24 V
Current 30 mA
Maximum absorbed power 700 mW

Wi-Fi interface type 802.11b/g/n - 2.4 GHz
Power 14dBm at connector
Safety: OPEN/WEP/WPA-PSK/WPA2-PSK
SMA aerial connector

Ingress protection class 30 IP
Operating temperature: minimum -20°C, maximum +50°C
Dimensions: 58x63x24 mm (excluding SMA and aerial)
Weight: 60 g

Table of compatibility with automation systems and Nice control units

HI-SPEED SYSTEMS								FOR SWING GATES										FOR SLIDING GATES						BARRIER GATE OPERATOR SYSTEMS				FOR GARAGE DOORS								CONTROL UNITS								
TOONA HS	WINGO HS	TITAN HS	HYKE HS	M-FAB HS	L-FAB HS	ROBUS HS	RUN HS	TOONA	WINGO	OLTRE	WALKY	HOPP	HYKE	HYPPO 7000	S-FAB 2024	S-FAB 2124	M-FAB	L-FAB	BIG-FAB	NAKED SLIDING	SLIGHT	ROBUS	ROAD	RUN	TUB	S-BAR	M-BAR	L-BAR	WIDE	SPY	SPINBUS	SPINBUSKIT 20/21/22	SPINBUSKIT 23	SPINKIT	TEN	TENKIT	SOON	SUMO	HYPPO 7100	MC824H	MC424L	A01	A02	A500	A6F	A60	A700F	A924
●	●	●	●	●	●	●	●	●		●	●	●	●	●		●	●	●	●	●	●	●		●		●	●	●		●	●		●		●		●		●	●							

NICE RADIO CONTROLS

ONE TRANSMITTERS

ON1E – 1 Channel 433.92MHz
ON2E – 2 Channel 433.92MHz
ON4E – 4 Channel 433.92MHz
Rolling code transmitters

INTI TRANSMITTERS

INTI1 – 1 Channel 433.92MHz
INTI2 – 2 Channel 433.92MHz

Rolling code transmitters

INTIKIT RC KIT

Universal kit, retro fit TX & RX suitable for almost any system.
3 x INTI Transmitters
1 x OX2 Receiver

OXI RECEIVER

4 Channel plug-in receiver. Accepts rolling code or dip switch transmitters.

OX2 RECEIVER

2 Channel stand alone receiver. Accepts rolling code or dip switch transmitters.

WE SUPPLY A WIDE RANGE OF RADIO CONTROLS FROM MANY MANUFACTURERS

Please get in touch with your requirements.

NICE BARRIER KITS

NEW

x1

x1

x1

x24

x1

AVAILABLE KITS:

24V DC
4M BAR

WIDEKIT1 (UP TO 4M)

1 x WIDES Barrier
1 x WA11 Adjustable stand
1 x WA10 24x Reflective strips
1 x WA19 Square bar

24V DC
7M BAR

WIDEKIT2 (UP TO 7M)

1 x WIDEL Barrier
1 x WA11 Adjustable stand
1 x WA10 24x Reflective strips
1 x XBA19 Aluminium bar
1 x XBA9 Bar connector

NEED LOOP DETECTORS?

Need loop detectors or timers for your barrier installation?

See pages **17** - **18** for details.

x1

x1

x1

x24

x1

AVAILABLE KITS:

24V DC
4M BAR

BARKIT1 (UP TO 4M)

1 x M5BAR Barrier
1 x WA11 Adjustable stand
24 x WA10 Reflective strips
1 x XBA14 Bar

24V DC
6M BAR

BARKIT2 (UP TO 6M)

1 x M7BAR Barrier
1 x WA11 Adjustable stand
1 x XBA9 Bar connector
24 x WA10 Reflective strips
1 x XBA15 Bar

24V DC
8M BAR

BARKIT3 (UP TO 8M)

1 x LBAR Barrier
1 x WA11 Adjustable stand
1 x XBA9 Bar connector
24 x WA10 Reflective strips
1 x XBA14 Bar

BENINCA SLIDING GATE KITS

x1

x1

x2

x1

AVAILABLE KITS:

24V DC
600kg

KBULL624ESA (GATES UP TO 600KG)
1 x BULL624ESA Motor
1 x CP.B24ESA Built-in control panel
1 x PAIR PUPILLA Photocells
2 x TO.GO2VA 433.92 MHz transmitter
1 x AW Aerial

24V DC
1000kg

KBULL1024ESA (GATES UP TO 1000KG)
1 x BULL10ESA Motor
1 x CP.B1024ESA Built-in control panel
1 x PAIR PUPILLA Photocells
2 x TO.GO2VA 433.92 MHz transmitter
1 x AW Aerial

24V DC
1000kg

KBULL80M (GATES UP TO 800KG)
1 x BULL8 Motor
1 x CP.BULL8-OM Built-in control panel
1 x PAIR PUPILLA Photocells
2 x TO.GO2VA 433.92 MHz transmitter
1 x AW Aerial

BENINCA SWING GATE KITS

x1/2

x1

x1

x2

x1

AVAILABLE KITS:

SINGLE LEAF KITS ALSO AVAILABLE

230V
3M PER LEAF

KBOB30ME (LEAF UP TO 3M)
2 x BOB30ME Operators c/w encoder device
1 x BRAINY Control panel
1 x PAIR PUPILLA Photocells
2 x TO.GO2VA 433.92 MHz transmitters
1 x AW Aerial

24V DC
3M PER LEAF

KBOB3024E (LEAF UP TO 3M)
2 x BOB3024E Operators c/w encoder device
1 x BRAINY24 Control panel
1 x PAIR PUPILLA Photocells
2 x TO.GO2VA 433.92 MHz transmitters
1 x AW Aerial

230V
5M PER LEAF

KBOB50ME (LEAF UP TO 5M)
2 x BOB50ME Operators c/w encoder device
1 x BRAINY Control panel
1 x PAIR PUPILLA Photocells
2 x TO.GO2VA 433.92 MHz transmitters
1 x AW Aerial

24V DC
5M PER LEAF

KBOB5024E (LEAF UP TO 5M)
1 x BOB5024E Operators c/w encoder device
1 x BRAINY24 Control panel
1 x PAIR PUPILLA Photocells
2 x TO.GO2VA 433.92 MHz transmitters
1 x AW Aerial

NEED ANY SAFETY EQUIPMENT?
We stock a full range of safety edges and safety accessories to help make your gate compliant.

See pages **15** - **16** for details.

WE STOCK A WIDE RANGE OF AUDIO, VIDEO, GSM & WIRELESS INTERCOMS.

See pages **20** - **23** for details.

BENINCA UNDERGROUND KITS

x2

x1

x1

x2

x1

AVAILABLE KITS: NOW WITH ENCODER

SINGLE LEAF KITS ALSO AVAILABLE

230V
3.5M PER LEAF

KDU.IT14NE (LEAF UP TO 3.5M)

2 x DU.IT14NE Underground operators
1 x BRAINY Control panel
1 x PAIR PUPILLA Photocells
2 x TO.GO2VA 433.92 MHz transmitters
1 x AW Aerial

24V DC
3.5M PER LEAF

KDU.IT24NVE (LEAF UP TO 3.5M)

2 x DU.IT24NVE Underground operators
1 x BRAINY24 Control panel
1 x PAIR PUPILLA Photocells
2 x TO.GO2VA 433.92 MHz transmitters
1 x AW Aerial

NEED ANY SAFETY EQUIPMENT?

We stock a full range of safety edges and safety accessories to help make your gate compliant.

See pages **15** - **16** for details.

x2

x1

x1

x2

x1

AVAILABLE KITS: NOW WITH ENCODER

SINGLE LEAF KITS ALSO AVAILABLE

230V
4M PER LEAF

KDU.350NGE (LEAF UP TO 4M)

2 x DU.350NGE Underground operators
1 x BRAINY Control panel
1 x PAIR PUPILLA Photocells
2 x TO.GO2VA 433.92 MHz transmitters
1 x AW Aerial

230V
3M PER LEAF

KDU.350NVE (LEAF UP TO 3M)

2 x DU.350NVE Underground operators
1 x BRAINY Control panel
1 x PAIR PUPILLA Photocells
2 x TO.GO2VA 433.92 MHz transmitters
1 x AW Aerial

NEED TOP HINGES TO GO WITH THIS SYSTEM?

See our gate hardware section.

See page **25** for details.

CAB HYDRAULIC UNDERGROUND GATE KITS

x1/2

x1

x2

x1

x1

AVAILABLE KITS:

SINGLE LEAF KITS ALSO AVAILABLE

KSB.35AC (LEAF UP TO 3.5M)

230V
3.5M PER LEAF

2 x SB.35AC Hydraulic operators
1 x A60 Control panel
2 x ON2E Rolling code transmitters
1 x PAIR EPM Photocell
1 x OXI Receiver

KSB.50 (LEAF UP TO 5M)

230V
5M PER LEAF

2 x SB.50 Hydraulic operators
1 x A60 Control panel
2 x ON2E Rolling code transmitters
1 x PAIR EPM Photocell
1 x OXI Receivers

WE STOCK A WIDE RANGE OF SAFETY EDGES AND SAFETY ACCESSORIES TO ENSURE THAT YOUR GATE IS COMPLIANT.

See pages **15** - **16** for details.

CAB HYDRAULIC GATE KITS

x1/2

x1

x2

x1

x1

AVAILABLE KITS:

KSHD.35 (LEAF UP TO 3.5M)

230V
3.5M PER LEAF

1 x HD.35 Hydraulic reversible ram
1 x A60 Control panel
2 x ON2E Rolling code transmitters
1 x PAIR EPM Photocell
1 x OXI Receiver

KSHD.35AC (LEAF UP TO 3.5M)

230V
3.5M PER LEAF

2 x HD.35AC Hydraulic lock assist open and close ram
1 x A60 Control panel
2 x ON2E Rolling code transmitters
1 x PAIR EPM Photocell
1 x OXI Receiver

KSHD.50 (LEAF UP TO 5M)

230V
5M PER LEAF

1 x HD.50 Hydraulic irreversible ram
1 x A60 Control panel
2 x ON2E Rolling code transmitters
1 x PAIR EPM Photocell
1 x OXI Receiver

KSHD.50AC (LEAF UP TO 5M)

230V
5M PER LEAF

2 x HD.50AC Hydraulic lock assist open and close ram
1 x A60 Control panel
2 x ON2E Rolling code transmitters
1 x PAIR EPM Photocell
1 x OXI Receiver

HD.80 (LEAF UP TO 8M)

230V
8M PER LEAF

HD.80 Hydraulic reversible ram

Kits available .Call us today to discuss your requirements.

HD.80 HYDRAULIC OPERATOR

The HD.80 is simply the biggest and most powerful hydraulic operator on the market. With an impressive 4 litre oil tank and 100000N thrust, the HD.80 is specified up to an 8m gate leaf. A truly unique operator.

BENINCA ACCESSORIES

PUPILLA PHOTOCELLS

Pair of adjustable (180°) photocells 24v ac/dc.

TO.GO. TRANSMITTERS

TO.GO.2VA – 2 Button
TO.GO.4VA – 4 Button

Rolling code transmitters

TO.GO. TRANSMITTERS

TO.GO.2WP – 2 Button
TO.GO.4WP – 4 Button

Dip switch transmitters

FULL RANGE OF BENINCA PRODUCTS INCLUDING SPARES AT COMPETITIVE PRICES
Please contact us with your requirements

RISE AUTOMATIC RISING BOLLARD KITS

x1

x1

10m

AVAILABLE KITS:

STAINLESS STEEL KITS ALSO AVAILABLE

230V

KHYDRAB (500MM BOLLARD)

1 x VIGILANT 500mm Hydraulic bollard
1 x HY.CELL1 Control panel
1 x C10 10m Connector cable
1 x FOUNDATION CASE

FOR ACCESS CONTROL PRODUCTS.

See pages **16** - **19** for details.

These kits are only available for single bollard installation. For multiple bollard kits please contact us on **0113 201 6677**

x1

x1

x1

10m

AVAILABLE KITS:

STAINLESS STEEL KITS ALSO AVAILABLE

24V DC

KVIGILANT500 (500MM BOLLARD)

1 x VIGILANT 500mm Electromechanical bollard
1 x CP1 Control panel
1 x RES Heating element
1 x C10 10m Connector cable
1 x FOUNDATION CASE

24V DC

KVIGILANT800 (800MM BOLLARD)

1 x VIGILANT 800mm Electromechanical bollard
1 x CP1 Control panel
1 x RES Heating element
1 x C10 10m Connector cable
1 x FOUNDATION CASE

Due to the bespoke nature of bollard installations call our sales team on **0113 201 6677** for a copy of our bollard pre-order form. With detailed specification we can provide an accurate product-supply only quotation.

SAFETY PRODUCTS

F210 PHOTOCELLS

Pair of adjustable photocells 210° horizontal and vertical 30°.

FT210 WIRELESS PHOTOCELLS

Pair of adjustable photocells 210° horizontal and vertical 30°.

FT210B WIRELESS PHOTOCELLS

Only compatible with Nice BLUEBUS automation systems. Pair of adjustable photocells 210° Not for swing gates.

EPM PHOTOCELLS

Pair of surface mounted photocells.

EPMB PHOTOCELLS

Only compatible with Nice BLUEBUS automation system. Pair of surface mounted photocells.

NEW

EPMA PHOTOCELLS

Pair of surface mounted **vandal resistant** photocells.

NEW

EPMAB PHOTOCELLS

Only compatible with Nice BLUEBUS automation system. Pair of surface mounted **vandal resistant** photocells.

NEW

EPS PHOTOCELLS

Pair of **slimline** surface mounted photocells.

NEW

EPSB PHOTOCELLS

Only compatible with Nice BLUEBUS automation system. Pair of **slimline** surface mounted photocells.

NEW

EPSA PHOTOCELLS

Pair of **slimline** surface mounted **vandal resistant** photocells.

NEW

EPSAB PHOTOCELLS

Only compatible with Nice BLUEBUS automation system. Pair of **slimline** surface mounted **vandal resistant** photocells.

NEW

EPLB PHOTOCELLS

Pair of **large** surface mounted **vandal resistant** photocells.

NEW

EPL PHOTOCELLS

Only compatible with Nice BLUEBUS automation system. Pair of **large** surface mounted photocells.

WIRELESS PHOTOCELLS

Pair of KEYCELL 24Vac/dc Wireless photocells, surface mounted with 180° beam rotation.

PUPILLA PHOTOCELLS

Pair of adjustable (180°) photocells 24v ac/dc.

CMA MECHANICAL SAFETY EDGES

CMA 1.5MT – Length 1.5M
CMA 1.7MT – Length 1.7M
CMA 2.0MT – Length 2.0M
CMA 2.5MT – Length 2.5M

FLASHING LIGHTS

ELAC – 230VAC
EL24 – 24V AC/DC
ELDC – 12V AC/DC,
Incorporated Aerial.

FINGER KEEPER

AFFKIND 2.5m finger guard with ali side strips (157mm wide)

AFFKINDWB 2.1m WIDE finger guard with ali side strips (260mm wide).

PPH1 PHOTOCELLS POST

Aluminium post photocells 500mm high.
For use with **EPM** & **EPMB** photocells.

GATE WARNING SIGN

WARNING GATE MOVING SIGN
Size 200 x 250mm
1mm Rigid PVC
MG SIGN
Available for swing & sliding

BLUEFORCE

Microtronics BLUEFORCE force tester, complete with bracket arm set with Bluetooth connectivity.

GTEKMG-LITE

Standalone one-hand gauge (no laptop required!), automatic measurement trigger, automatic EN12453 robust tripod and spacer set available.

GTEKMG-LITEARMS

Spacer arm-set, robust measurement tripod, distance pieces.

ALUMINIUM GATE RANGE.

See pages **38** - **41** for details.

ASO MADE TO MEASURE SAFETY EDGES & COMPONENTS

15MM	15MM	25MM	45MM	65MM	85MM
SKL15-10 TT	**GF15.25TT**	**GF25.30 TT**	**GEF 45SK**	**GEF 65SK**	**GEF 85SK**
ASO1.0/15MM END **ASO1.5/15MM** END **ASO2.0M/15MM** END **ASO2.5/15MM** END	**ASO1.0/25MM** END **ASO1.5/25MM** END **ASO2.0M/25MM** END **ASO2.5/25MM** END	**ASO1.0/30MM** END **ASO1.5/30MM** END **ASO2.0M/30MM** END **ASO2.5/30MM** END	**ASO1.0/45MM** END **ASO1.5/45MM** END **ASO2.0M/45MM** END **ASO2.5/45MM** END	**ASO1.0/65MM** END **ASO1.5/65MM** END **ASO2.0M/65MM** END **ASO2.5/65MM** END	**ASO1.0/85MM** END **ASO1.5/85MM** END **ASO2.0M/85MM** END **ASO2.5/85MM** END
ASO1.0/15MM THRU **ASO1.5/15MM** THRU **ASO2.0M/15MM** THRU **ASO2.5/15MM** THRU	**ASO1.0/25MM** THRU **ASO1.5/25MM** THRU **ASO2.0M/25MM** THRU **ASO2.5/25MM** THRU	**ASO1.0/30MM** THRU **ASO1.5/30MM** THRU **ASO2.0M/30MM** THRU **ASO2.5/30MM** THRU	**ASO1.0/45MM** THRU **ASO1.5/45MM** THRU **ASO2.0M/45MM** THRU **ASO2.5/45MM** THRU	**ASO1.0/65MM** THRU **ASO1.5/65MM** THRU **ASO2.0M/65MM** THRU **ASO2.5/65MM** THRU	**ASO1.0/85MM** THRU **ASO1.5/85MM** THRU **ASO2.0M/85MM** THRU **ASO2.5/85MM** THRU

WE STOCK A WIDE RANGE OF ASO PRODUCTS.

Not only can we supply made to measure edges in all profiles, we supply components at competitive prices.
Please contact us with your requirements

ASO SAFETY EDGE COMPONENTS

15MM	15MM	25MM	45MM	65MM	85MM
SKL15-10 TT SKL15 10 TT profile.	**GF15.25TT** GF15.25TT clip together T-foot rubber profile.	**GF25.30 TT** GF25.30 TT clip together T-foot rubber profile.	**GEF 45SK** GEF 45SK profile.	**GEF 65SK** GEF 65SK profile.	**GEF 85SK** GEF 85SK profile.
AL15-9 Aluminium profile.	**AL15-9** Aluminium profile.	**AL25-14** Aluminium profile.	**AL30-10** Aluminium profile.	**AL30-10** Aluminium profile.	**AL30-10** Aluminium profile.

ASO SAFETY EDGE COMPONENTS

15MM	15MM	25MM	45MM	65MM	85MM
KS2L2.5 2.5m cable set.	**KS4L2.5 15.25 Set** 2.5m cable set.	**KS4L2.5 25.30 Set** 2.5m cable set.	**KS8L2.5-45** 2.5m cable set.	**KS8L2.5-65** 2.5m cable set.	**KS8L2.5-85** 2.5m cable set.
KS2W KS2 resistor plug 8.2K.	**KS4W 15.25 Set** KS2 resistor plug 8.2K.	**KS4W8K2 25.30** KS2 resistor plug 8.2K.	**KS8W-45** KS2 resistor plug 8.2K.	**KS8W-65** KS2 resistor plug 8.2K.	**KS8W-85** KS2 resistor plug 8.2K.

Rolling Center UK
INNOVATIVE SOLUTIONS FOR METAL GATES AND DOORS

DHF AUTOMATED GATES SAFETY TRAINING COURSE

TO FIND OUT ABOUT OUR NEXT COURSE:
CALL: **0113 201 6677**
OR EMAIL: **INFO@ROLLINGCENTER.CO.UK**

DHF SAFETY ASSURED
POWERED GATE GROUP

This well-established 2-day course covers all areas of gate safety including:

- ✓ Law & Regulation
- ✓ Standards
- ✓ Risk Assessment
- ✓ Inspection & Testing
- ✓ Repair & Maintenance
- ✓ Documents & CE labels

CONTROLLERS

NICE TCE

Control interface relay for resistive edges.

RB3RX

Wireless safety edge receiver.

RB3TX

Wireless safety edge transmitter.

NEW

BENINCA RF.TX

Transmitter for wireless safety edge signal.

NEW

BENINCA SC.RF

Receiver for wireless safety edge signal (up to 8 Tx's).

ASO COMPACT INDUS KIT – FOR SLIDING GATES

Inductive transmission system. Cat 3 inductive transmission kit, 24v ac/dc. 2X stationary edge inputs. 2X moving edge inputs.

PSU'S

12V 1A PSU

Output: 12 vdc, 1A
Input: 230vac.

DR1524

Slim factor DIN rail PSU module, 24V DC 0.63A.

CA1R

12/24vac, 2A at 12v, 1A at 24v DIN rail PSU.
Input - 230v.

LOOP DETECTORS

LD100 & LD200

LD100 230v Single channel boxed loop detector & base.

LD200 230v Dual channel boxed loop detector & base.

LD102

LD102 24v Single channel boxed loop detector & base.

LD202 24v Single channel boxed loop detector & base.

LD113 & LD213

LD113 24v Single channel card loop detector.

LD1213 24v Single channel card loop detector.

NEW

VD962 MAGNA SENSOR

Optimised for burying in the centre of a roadway. Sensor detects presence of large ferrous objects within a 1m range.

LOOKING FOR SLIDING GATE HARDWARE EQUIPMENT?

Call us on **0113 201 6677**.

RELAYS

VHLR RELAY

12-24v AC/DC 2 pole PCB relay.

RELAY BASE

11 pin relay base, din rail mountable.

DID YOU KNOW THAT WE STOCK A FULL RANGE OF LOCINOX PRODUCTS?

See page **24** for details.

KEYPADS, KEYSWITCHES & EGRESS BUTTONS

DC60SS

Surfacemount standalone keypad, 2 relay outputs, 110 user codes, 2 user modes: single or multi user,12/24v ac/dc.

VIDEX 800NS

Surface mounted Standalone keypad, stainless steel, 2 relay outputs, 2 user codes 12/24v ac/dc.

VIDEX MT PAD

A compact keypad finished in various colours with illuminated keys, 99 codes, 1 relay output and a 0v output.

EDSWG

NEW

3 Channel wireless keypad. Range of 25 metres in free space and 15 metres inside a building.Backlit keypad, 2 year battery life.

PRASTEL EASY BKA

NEW

Surface mounted Standalone keypad, stainless steel, 2 relay outputs, 2 user codes 12/24v ac/dc.

LOCINOX SLIMSTONE

Slimline keypad, stainless steel fascia and aluminium housing, 2 relay outputs, up to 100 codes, 10-26v ac/dc.

EKSEU

NEW

Key selectors for outdoor and recessed installation with automatic return lock, European cylinder.

RTE-SS-SS

Surface hooded shroud, UK back box format, stainless steel brushed finish. Medium to heavy use.

RTE-SS-SSD

Surface fit, stainless steel brushed finish. Domed exit button, high impact buttons, external or internal use.

ES BUTTON

Twist release, 1 normally closed contact.

ROTARY ISOLATOR

EN60947 compliant, IP65 rating. 4 pole rotary isolator, padlockable handles, Easy access and remote switch.

CAN'T SEE WHAT YOU'RE LOOKING FOR?

Our friendly team are here to help.
Call us on **0113 201 6677**
or email **info@rollingcenter.co.uk**

GSM SWITCH

GMTRC01 GSM SWITCH

Up to 200 phone numbers, 12v dc, 1 relay output, IP65.

RC GSM SWITCH

Up to 512 phone numbers, 12-32v dc, 2 relay outputs, IP rated.

ALUMINIUM GATE RANGE.

See pages **38** - **41** for details.

TIMER CLOCKS

TH827/12V TH827/24V TH827/240V

12v - 24v - 24vac 7 day digital timer.

VE462800

NEW

12/24v ac/dc programmable time clock, summertime update, manual override, password protected, 3 year battery life, din rail mountable.

TS2000-BST 7 DAY CLOCK

Auto British/Euro time adjust, LCD display, Quartz crystal timing with reservre.

PROXIMITY KITS

DORABLE STAND ALONE PROX KIT

1x DorAble control unit
2x Master cards

Up to 30 users.

PROXKIT1

1x DoorTag VI controller
1x Stainless steel reader
10x Proximity cards

Up to 1000 users.

VIDEX MINI – SA2

1x SA2 controller
Programming with master card, delete card and shadow cards.
Up to 4000 users.

ENCLOSURES

STEELENC1

400 x 300 x 150mm Steel enclosure.

STEELENC2

600 x 400 x 150mm Steel enclosure.

ARCA403021

ARCA GRP Enclosure
400 x 300 x 210mm.

ARCA504021

ARCA GRP Enclosure
500 x 400 x 210mm.

ARCA604021

ARCA GRP Enclosure
600 x 400 x 210mm.

DOOR LOOPS

ADL DOOR LOOP

60cm anti vandal door loop, flexible power transfer.

FM DOOR LOOP

45Cm traditional door loop, flexible power transfer.

CABLES

LOOP CABLE

For use with loop detectors
100m & 500m.

3 CORE ARMOURED CABLE

1.5mm 3 core SWA, 50m & 100m.

4 CORE FLEX CABLE

1mm 4 core,
50m & 100m.

5 CORE FLEX CABLE

1.5mm 5 core.
50m & 100m.

TO VIEW OUR FULL RANGE OF PRODUCTS VISIT:
WWW.ROLLINGCENTER.CO.UK

VIDEX AUDIO INTERCOMS

VIDEX 4K-1S KIT

1 Way audio intercom surface mount.

STANDARD 3-1 AUDIO

VIDEX DK4K-1S KIT

1 Way audio intercom with keypad surface mount.

CODELOCK UNIT · STANDARD 3-1 AUDIO

VIDEX VR4K-1S KIT

1 Way vandal resistant audio intercom, surface mount.

VANDAL RESISTANT · STANDARD 3-1 AUDIO

VIDEX VR4K/1S/CL KIT

1 Way vandal resistant audio intercom with keypad, surface mount.

CODELOCK UNIT · VANDAL RESISTANT · STANDARD 3-1 AUDIO

VIDEX VIDEO INTERCOMS - SUPPLIED WITH 6256 MONITOR.

VIDEX CVK4KS KIT

1 Way colour video intercom, surface mount.

VANDAL RESISTANT · 6 WIRE BUS · INTERCOM · WIDE CAMERA OPTION

VIDEX CVKC4KS KIT

1 Way colour video intercom with keypad, surface mount.

CODELOCK UNIT · 6 WIRE BUS · INTERCOM · WIDE CAMERA OPTION

VIDEX CVR4KV-1S KIT

1 Way vandal resistant colour video intercom, surface mount.

VANDAL RESISTANT · 6 WIRE BUS · INTERCOM · WIDE CAMERA OPTION

VIDEX CVR4KV-1S/CL KIT

1 Way vandal resistant colour video intercom with keypad, surface mount.

CODELOCK UNIT · VANDAL RESISTANT · 6 WIRE BUS · INTERCOM · WIDE CAMERA OPTION

VIDEX CVK8KS KIT

1 Way colour video intercom, surface mount.

INTERCOM · WIDE CAMERA OPTION

VIDEX CVKC8KS KIT

1 Way colour video intercom with keypad, surface mount.

CODELOCK UNIT · INTERCOM · WIDE CAMERA OPTION

MONITORS

6358

3.5" Hands free video monitor.

6458

4.3" Hands free video monitor.

6758

7" Hands free video monitor.

VIDEX GSM INTERCOMS

VIDEX GSM4K-1S KIT

1 Way GSM intercom kit with integrated proximity access control, surface mount.

GSM · PROXIMITY READER

VIDEX GSM4KC-1S KIT

1 Way GSM intercom kit with integrated proximity access control and keypad, surface mount.

CODELOCK UNIT · GSM · PROXIMITY READER

NEW

VIDEX LTGSM4K-1S KIT

1 Way GSM audio intercom, surface mount.

GSM

NEW

VIDEX LTGSM4KC-1S KIT

1 Way GSM audio intercom with keypad, surface mount.

CODELOCK UNIT · GSM

VIDEX VR4K-1S/GSM

1 Way GSM vandal resistant audio intercom, surface mount.

IK 07 VANDAL RESISTANT · GSM

VIDEX VR4K-1S/GSM/CL KIT

1 Way GSM vandal resistant audio intercom with keypad, surface mount.

IK 07 VANDAL RESISTANT · CODELOCK UNIT · GSM

VIDEX 2 WIRE VIDEO INTERCOMS - SUPPLIED WITH 6256 MONITOR.

NEW

VIDEX ESVKX-1S KIT

1 Way 2 wire video intercom, surface mount.

CODELOCK UNIT · 6 WIRE BUS · PROXIMITY READER OPTION

NEW

VIDEX ESVKX-2S KIT

2 Way 2 wire video intercom, surface mount.

CODELOCK UNIT · 6 WIRE BUS · PROXIMITY READER OPTION

NEW

VIDEX ESVKC-1S KIT

1 Way 2 wire video intercom with keypad, surface mount.

CODELOCK UNIT · 6 WIRE BUS · PROXIMITY READER OPTION

NEW

VIDEX ESVKC-2S KIT

2 Way 2 wire video intercom with keypad, surface mount.

CODELOCK UNIT · 6 WIRE BUS · PROXIMITY READER OPTION

VIDEX IP INTERCOMS - SUPPLIED WITH 6256 MONITOR.

NEW

VIDEX IVPK-1S KIT

1 Way IP video intercom, surface mount.

2 WAY · CODELOCK UNIT · IP SYSTEM · PROXIMITY READER OPTION

NEW

VIDEX IVPKC-1S KIT

1 Way IP vandal resistant video intercom, surface mount.

2 WAY · CODELOCK UNIT · IP SYSTEM · PROXIMITY READER OPTION

VIDEX IP INTERCOMS - SUPPLIED WITH 6256 MONITOR.

NEW

VIDEX IVPR-1S KIT

1 Way IP vandal resistant video intercom, surface mount with shroud.

2 WAY | CODELOCK UNIT | IP SYSTEM | PROXIMITY READER OPTION

NEW

VIDEX 6296 MONITOR

Surface mount, 3.5inch touch screen IP colour videophone.

INTERCOM POSTS

NEW

PO1200

Car height 1.2m
45° angled post.

NEW

PO1600

Pedestrian Height 1.6m
45° angled post.

NEW

PO2000

HGV Height 2m
45° angled post.

WE ARE DISTRIBUTORS OF VIDEX PRODUCTS

VIDEX®

DID YOU KNOW?

WHETHER YOU REQUIRE FULL BESPOKE SYSTEMS FOR APARTMENTS OR REPLACEMENT SPARES, WE CAN SUPPLY THE WHOLE RANGE AT VERY COMPETITIVE PRICES

PLEASE CONTACT US WITH YOUR REQUIREMENTS - 0113 201 6677

CDVI VIDEO ENTRY SYSTEMS

CDVI CDV4791-B

1-Way colour kit, black with SD card, 2 wire.

CDVI CDV4791-W

1-Way colour kit, white, with SD card, 2 wire.

CDVI CDV4796KP-B

1-Way colour kit, black, with SD, integral Keypad, 2-wire.

CDVI CDV4796KP-W

1-Way colour kit, white, with SD, integral keypad, 2-wire.

CDVI ADDITIONAL MONITORS

CDVI CDV47W

7" Digital white, lcd monitor, touch screen with SD card.

CDVI CDV47B

7" Digital black, lcd monitor, touch screen with SD card.

DAITEM WIRELESS INTERCOMS

DAITEM SC901AU

1 Button wireless intercom + built in proximity reader.

DAITEM SC902AU

1 Button wireless intercom with keypad + built in proximity reader.

DAITEM SC902AU2

2 Button wireless intercom with keypad. With built in proximity reader.

DAITEM SC100AU

Digital handset. Max 4 per call button.

AES WIRELESS AUDIO INTERCOMS

AES 603-AB
(WIRELESS INTERCOM KIT)

603-AB Architectural model hooded & industrial versions available.

AES 603-ABK
(WIRELESS INTERCOM KIT + KEYPAD)

603-AB Architectural keypad model hooded & industrial versions available.

AES 603-EH

Additional handset for AES intercoms (Max 4 per kit).

WE HAVE A FULL RANGE OF INTERCOMS AVAILABLE AT COMPETITIVE PRICES.

If you don't see what you are looking for call us on
0113 201 6677.
or email **info@rollingcenter.co.uk**

AES WIRELESS AUDIO INTERCOMS

NEW

AES 603-IMP
(WIRELESS INTERCOM KIT)

603-IM Stylish all black panel shrouded design.

NEW

AES 603-IMPK
(WIRELESS INTERCOM KIT + KEYPAD)

603-IM Stylish all black panel shrouded design with keypad.

NEW

AES 603-ED
(WIRELESS INTERCOM KIT)

603-ED Surface model (NEW DESIGN).

NEW

AES 603-EDK
(WIRELESS INTERCOM KIT + KEYPAD)

603-ED Surface model (NEW DESIGN) with keypad.

NEW

AES 603-EDF
(WIRELESS INTERCOM KIT)

603-ED Flush model (NEW DESIGN).

NEW

AES 603-EDFK
(WIRELESS INTERCOM KIT + KEYPAD)

603-ED Flush model (NEW DESIGN) with keypad.

AES GSM INTERCOMS

AES GSM-5AB
(GSM INTERCOM KIT)

GSM-5AB Architectural model.

AES GSM-5ABK
(GSM INTERCOM KIT + KEYPAD)

GSM-5AB Architectural model with keypad.

NEW

AES GSM-5AB
(GSM INTERCOM KIT)

GSM-5AB Stainless steel architectural model.

NEW

AES GSM-5ABK
(GSM INTERCOM KIT + KEYPAD)

GSM-5AB Stainless steel architectural model with keypad.

NEW

AES GSM-5IMP
(GSM INTERCOM KIT)

GSM-5IM Stylish all black panel shrouded design.

NEW

AES GSM-5IMP
(GSM INTERCOM KIT + KEYPAD)

GSM-5IM Stylish all black panel shrouded design with keypad.

AES SMART INTERCOM SYSTEMS

NEW

AES GSM-5AB
(GSM INTERCOM KIT)

GSM-5AB Architectural model with monitor, surface mount.

NEW

AES GSM-5ABK
(GSM INTERCOM KIT + KEYPAD)

GSM-5AB Architectural model with monitor and keypad, surface mount.

NEW

AES GSM-5A CP
(GSM INTERCOM KIT)

GSM-5AB Architectural model, surface mount.

NEW

AES GSM-5ABK CP
(GSM INTERCOM KIT + KEYPAD)

GSM-5AB Architectural model with keypad, surface mount.

AES 4G PREDATOR GSM VIDEO INTERCOM SYSTEM

- 4G version of the fastest growing AES product, the Predator Video intercom.
- Connects to 4G network with 4G compatible SIM (not included).
- No need for Wi-Fi connectivity. Totally independent from home network.
- Easy plug and play setup with same App as Wi-Fi version.
- Simply connect both devices together via Ethernet cable (supplied), connect power, and log on with provided credentials.
- Complete with 24v dc PSU (for intercom), and POE adaptor (for modem).
- 100 calls per ½ Gb of data (on 30 second calls).

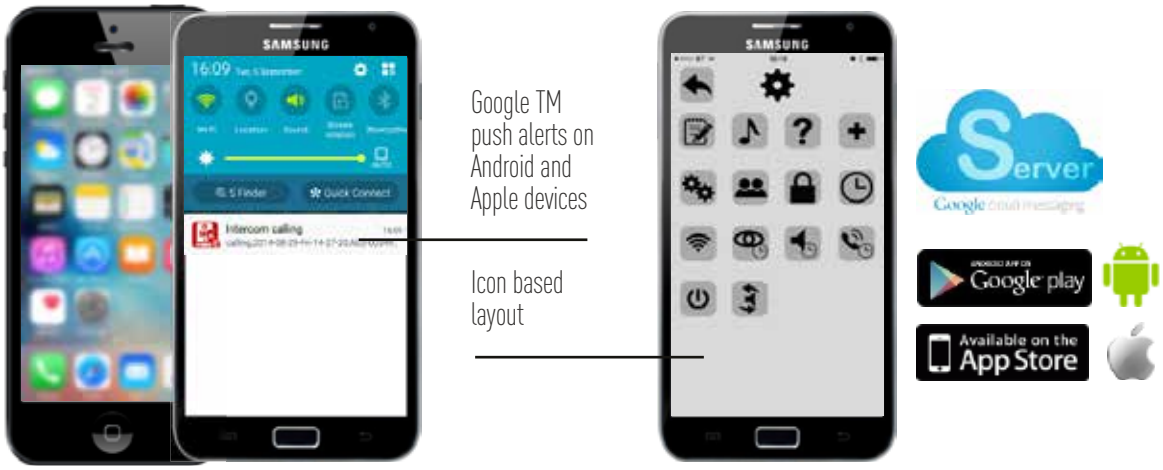

AES 4G PREDATOR GSM VIDEO INTERCOM SYSTEMS

AES PRE2-4GE/AB
(VIDEO GSM INTERCOM KIT)

PRE2-4GE Architectural model.

AES PRE2-4GE/ABK
(VIDEO GSM INTERCOM KIT)

PRE2-4GE Architectural model with keypad.

AES PRE2-4GE/IMP
(VIDEO GSM INTERCOM KIT)

PRE2-4GE Stylish all black panel shrouded design.

AES PRE2-4GE/IMPK
(VIDEO GSM INTERCOM KIT)

PRE2-4GE Stylish all black panel shrouded design with keypad.

AES PRE2-4GE/AS
(VIDEO GSM INTERCOM KIT)

PRE2-4GE Stainless steel architectural model.

AES PRE2-4GE/ASK
(VIDEO GSM INTERCOM KIT)

PRE2-4GE Stainless steel architectural model with keypad.

AES WIFI PREDATOR 2 VIDEO INTERCOM SYSTEM

- Simple setup by mobile phone.
- Connect to the intercom directly through your phone's Wi-Fi, enter the pass code for the home hub Wi-Fi and the device is connected.
- View the gate/door and open any time with monitoring mode.
- Full duplex speech.
- 2 Relay output, Latching outputs for hold open.
- Upgraded camera, with IR cut filter.
- Stores images of the last 32 missed callers on your phone.
- Still works locally on Wi-Fi network even if broadband goes down.

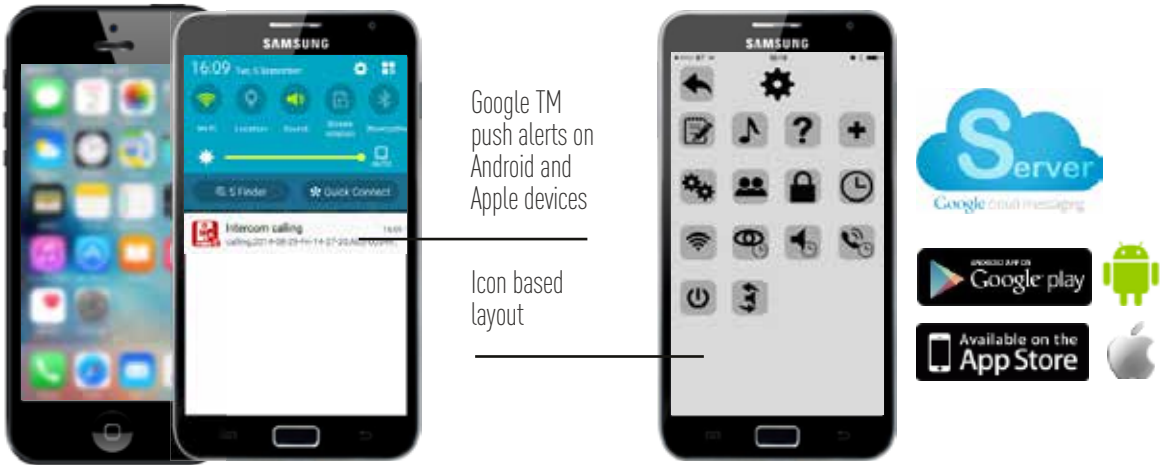

AES PREDATOR WIFI 2 INTERCOMS



AES PRED2 WIFI-AB
(WIFI INTERCOM KIT)

PRED2-WIFI-AB Architectural model.

AES PRED2 WIFI-IMP
(WIFI INTERCOM KIT)

PRED2-WIFI-IM Stylish all black panel shrouded design.

AES PRED2 WIFI-ABK
(WIFI INTERCOM KIT + KEYPAD)

PRED2-WIFI-AB Architectural model with keypad.

AES PRED2 WIFI-IMPK
(WIFI INTERCOM KIT + KEYPAD)

PRED2-WIFI-IM Stylish all black panel shrouded design with keypad.

AES MONITOR

TAB10

Wall mounted touch screen monitor, 10.1 inch LCD Android screen, RJ-45 interface USB port, 12vdc or POE, 260 x 170 x 26mm.

LOCINOX LOCKS, CLOSERS & ACCESSORIES

LOCINOX LAKQ U2

Industrial lock in steel finish with plain aluminium handles. To suit **30-50mm** section.

RC code: **9/02**

LOCINOX LAKQ U2

Industrial lock in steel finish with plain aluminium handles. To suit **40-60mm** section.

RC code: **9/03**

LOCINOX LAKY F2

Decorative lock in black finish with rope twist handles. To suit **30-40mm** section.

RC code: **9/04**

LOCINOX LAKQ H2

Decorative lock in black finish with rope twist handles. To suit **30-50mm** section.

RC code: **9/0RA**

LOCINOX LAKY F2

Decorative lock in black finish with rope twist handles. To suit **40-50mm** section.

RC code: **9/05**

LOCINOX LAKY H2

Decorative lock in black finish with rope twist handles. To suit **40-60mm** section.

RC code: **9/05A**

LOCINOX VINCI

Mechanical industrial gate code lock, aluminium housing and stainless steel mechanism.

LOCINOX LSKZ SLIDING GATE LOCK

Industrial lock, aluminium housing and stainless steel mechanism.

LOCINOX LLKZ SLIDING GATE LOCK & KEYPAD

Industrial lock, aluminium housing and stainless steel mechanism.

LOCINOX ELECTRADROP

Electric 24 dropbolt, 115 mm throw for safe locking of automated gates.

LOCINOX DC-POWER 24V/25W

DIN rail mounted PSU 24v/25w for Electradrop drop bolt.

LOCINOX OGS

Off-centred ground stop for Electradrop dropbolt.

LOCINOX MAG-2500

For mounting on square posts and gate profiles of 40mm to 80mm, 250kg pulling force, with handles.

LOCINOX MAG-5000

For mounting on square posts and gate profiles of 40mm to 80mm, 500kg pulling force, with handles.

LOCINOX MAGMAG-2500

For mounting on square posts and gate profiles of 40mm to 80mm, 250kg pulling force, with no handles.

LOCINOX MAGMAG-5000

NEW

For mounting on square posts and gate profiles of 40mm to 80mm, 500kg pulling force, with no handles.

LOCINOX MODULEC-SA

Electric keep (fail/close) for locinox locks, 40-60mm section, 12-24v ac/dc.

WE SUPPLY A FULL RANGE OF LOCINOX PRODUCTS AT COMPETITIVE PRICES.

Get in touch to request your free copy of the latest Locinox catalogue.

CLOSERS & LOCKS

LOCINOX SAMSON 2

Polyvalent hydraulic gate closer. For gates up to 150kg max 2m wide, continuously adjustable final snap for a perfect closing, opening angle up to 150° depending on the situation.

VERTICLOSE PEDESTRIAN GATE CLOSER

Adjustable closing speed and pressure. Suitable for square profiles and wall fixing 180° or 90° hinge mountings, stainless steel body, vandal proof, quick installation.

MAMMOTH HYDRAULIC GATE CLOSER & HINGE BEARING IN 1

Adjustable closing speed and pressure. Suitable for square profiles and wall fixing 180° or 90° hinge mountings, stainless steel body, vandal proof, quick installation.

GCG5000 PEDESTRIAN GATE CLOSER

350Nm & 450Nm versions available. For use with electric locks on non-automated gates, quick and easy to fit, slow controlled closing speed. Suitable for timber or metal gates up to 1.2M / 80kg, no maintenance.

NEW

TIGER

Hydraulic, self closing, double bearing hinge with a 180° opening angle that easily closes gates up to 75 kg. Closing speed and final snap can be adjusted after installation. Fast and easy fixing with Quick-Fix. Combination with Puma (nonself closing) hinge. Conform with Rospa regulations.

WE NOW SUPPLY A FULL RANGE OF GATES, BARRIERS & TURNSTILES.

See pages **45** - **55** for details.

LOCKS

BORG 3100

Mechanical coded gate lock, marine grade steel, to suit 40-60mm RHS.
9/10 Single sided keypad, left or right handed
9/11 Double sided keypad

BORG 3400

Mechanical coded gate lock, marine grade steel, to suit 30-60mm RHS.
9/10L Single sided keypad, left or right handed
9/11L Double sided keypad

VIRO PLA11

Electromechanical lock, 12vdc horizontal electric lock with keyed release, supplied with strike plate and 3 keys.

VIRO PLA10

Electromechanical lock, 12vdc vertical electric lock with keyed release, supplied with strike plate and 3 keys.

CISA ELECRTIKA

Electromechanical dead lock with keyed release, pull resistance 2000kg, supplied with back plates, 3 keys and fixings 12vac.

DU.2880LC

Heavy duty solenoid bolt 80mm throw, 20mm dia.
Requires:
DRAN120-24
24a 24vdc 5amp PSU.

MAGNETIC LOCKS

ES180

Surface magnet, 168 x 33 x 34mm, holding force 180kg, monitored.

ES400

Surface magnet, 230 x 43 x 30mm, holding force 400kg, monitored.

ES500

Surface magnet, 230 x 61 x 40mm, holding force 500kg, monitored.

NEED ASSISTANCE WITH CHOOSING THE RIGHT GATE CLOSER OR LOCK?
Call us on **0113 201 6677** or email **info@rollingcenter.co.uk**

SWING GATE HARDWARE

CR30
28mm dia adjustable wrap around hinge with flange nut.

CR35
34mm dia adjustable wrap around hinge with flange nut.

CR40
36mm dia adjustable wrap around hinge with flange nut.

CR30P
30mm dia adjustable wrap around hinge with plate.

CR35P
35mm dia adjustable wrap around hinge with plate.

F105
Concrete-in gate stop.

T30
28.5mm dia upright gate joint pin for wrap around hinge to weld.

T35
33.5mm dia upright gate joint pin for wrap around hinge to weld.

T40
38.5mm dia upright gate joint pin for wrap around hinge to weld.

T35/80
33.5mm dia extended length upright gate joint pin for wrap around hinge to weld.

T40/90
33.5mm dia extended length upright gate joint pin for wrap around hinge to weld.

NEW

T35F
33.5mm dia extended length upright gate joint pin for wrap around hinge to weld.

CR60
M 30 thread Adjustable hinge for heavy gates with two bearings and lubrication pin.

CR50
M 30 thread Adjustable hinge for heavy gates with two bearings and lubrication pin.

CR18
M 18m thread adjustable weld on hinge with flange nut.

CR20
M 20 thread adjustable weld on hinge with flange nut.

CR24
M 24 dia adjustable weld on hinge with flange nut.

CL20
M 20 dia adjustable hinge with long bar.

CL24
M 24 dia adjustable hinge with long bar.

PG 51S
50mm dia rotating top hinge.

PG 71S
70mm dia rotating top hinge.

PG121S
120mm dia rotating top hinge.

STILO 139P
Heavy duty hinge, 400kg load hinge.

F105
Centre stop for swing gates.

SWING GATE HARDWARE

CR 30 TO 50Q
30 to 50mm hinge for square section with flange nut.

CR 30 TO 50QP
30 to 50mm hinge for square section with hinge with plate.

PG 50I
50mm dia rotating bottom hinge.

PG 70I
70mm dia rotating bottom hinge.

PG120I
120mm dia rotating bottom hinge.

PG 51 S2
50mm dia rotating bottom hinge.

PG 71 S2
70mm dia rotating bottom hinge.

PG 50 I2
50mm dia rotating bottom hinge.

PG 70 I2
70mm dia rotating bottom hinge.

SLIDING GATE HARDWARE

NEW OMEGA (UP TO 1200KG)
Concrete down ground track for sliding gates and industrial doors, 20mm round for O groove wheels, supplied in modular 3m lengths, galvanised finish. 1.5m steel body below concrete with 3mm hard carbon steel top rail. **53NO** joint pin supplied separately.

FLOORZ3 (UP TO 500KG)
Formed from one continuous piece of 3.5mm structural grade steel, better suited to applications where welding to other steel work is required. Also available in a V profile.

SISTEMA (UP TO 700KG)
Concrete down ground track for sliding gates and industrial doors, 20mm round for O groove wheels, supplied in modular 3m lengths, galvanised finish. Multiple lengths are precisely aligned using the new **rapida** quick fix joint.

HEAVY (UP TO 3000KG)
Flush-lay concrete-in ground track for heavy sliding gates and industrial doors, 20mm solid round bar for O groove wheels, in 3m modular lengths, galvanised finish. Alignment bracket supplied separately **53/1**.

827 O
80mm dia normal wheel with one bearing to suit 20mm tracks.

1027 O
100mm dia normal wheel with one bearing to suit 20mm tracks.

1227 O
120 dia normal wheel with one bearing to suit 20mm tracks.

830 O
80mm dia normal wheel with two bearing to suit 20mm tracks.

1030 O
100mm dia normal wheel with two bearing to suit 20mm tracks.

1230 O
120mm dia normal wheel with two bearing to suit 20mm tracks.

SLIDING GATE HARDWARE

827 PSO

80mm dia wheel with one bearing and support to suit 20mm tracks.

1026 / 1227 PSO

100 / 120mm dia wheel with one bearing and support to suit 20mm tracks.

1030 PCO

100mm dia wheel with closed support and two bearings to suit 20mm tracks.

2RG

Adjustable guide plate, wall fixed.

4RG

Adjustable guide plate, medium & large.

2RGGZ

Galvanised adjustable guide plate, wall fixed.

4RM R

Galvanised guide plate adjustable upto 90mm between rollers, wall fixed.

4RM RP

Galvanised guide plate adjustable upto 90mm between rollers, wall fixed with roller protection.

50S

Adjustable sliding gate keep, 40 to 80mm.

50 RP & RS ADJUSTABLE MEETING POINT WITH ROLLERS

50 RP 40-80mm.
50 RS 80-150mm.

50 RL ADJUSTABLE MEETING POINT WITH ROLLERS

50 RL 80-150mm.

RNF GUIDE ROLLERS

Nylon roller with bearing, 40 to 80mm dia versions available.

CN GUIDE ROLLERS

Cylindrical nylon roller, 25 to 42mm dia versions available.

BN36P

Cylindrical nylon roller 36mm dia, with roller protection.

CN P GUIDE ROLLERS

Cylindrical nylon roller, 25 to 42mm dia versions available. With roller protection.

58/ GUIDE CHANNELS

Guide channels for sliding gates, 40 to 80mm width available.

You'll find detailed technical specifications for all our Rolling Center and gate automation products online.

WWW.ROLLINGCENTER.CO.UK
CALL TODAY FOR YOUR COPY OF OUR LATEST TRADE CATALOGUES: 0113 201 6677

NEW H900 CANTILEVER SYSTEM - 10M OPENING UP TO 900KG

x2

9M

x2

x2

6M PER LEAF

900kg

H900KIT 1

(6M OPENING, GATES UP TO 900KG)

2 x H900-2 Cantilever carriages | **9M GIPI 4 RHZ** Galvanised Cantilever track
2 x 41H/SPEC Support wheels c/w plate | **2 x 50H** Meeting Cups

NEED ANY SAFETY EQUIPMENT?

We stock a full range of safety edges and safety accessories to help make your gate compliant.

See pages **15** - **16** for details.

x2

10M

x2

x2

7M PER LEAF

900kg

H900KIT 2

(7M OPENING, GATES UP TO 900KG)

2 x H900-2 Cantilever carriages | **10M GIPI 4 RHZ** Galvanised Cantilever track
2 x 41H/SPEC Support wheels c/w plate | **2 x 50H** Meeting Cups

LOOKING FOR SLIDING GATE HARDWARE EQUIPMENT?

Call us on **0113 201 6677**

x2

12M

x2

x2

8.5M PER LEAF

900kg

H900KIT 3

(8.5M OPENING, GATES UP TO 900KG)

2 x H900-2 Cantilever carriages | **12M GIPI 4 RHZ** Galvanised Cantilever track
2 x 41H/SPEC Support wheels c/w plate | **2 x 50H** Meeting Cups

TRAINING COURSES...

Did you know that we offer bespoke training courses on all the products that we sell?

x2

15M



x2

x2

10M PER LEAF

900kg

H900KIT 4

(10M OPENING, GATES UP TO 900KG)

2 x H900-2 Cantilever carriages | **15M GIPI 4 RHZ** Galvanised Cantilever track
2 x 41H/SPEC Support wheels c/w plate | **2 x 50H** Meeting Cups

H900 SILENT SYSTEM AVAILABLE.

All H900 kits are available with SILENT carriages - 35% quieter than standard carriages, same loadings - **Guaranteed**.

CANTILEVER GATE HARDWARE

x2

x2

x2

6m

6M PER LEAF

450kg

MINI CANTILEVER SYSTEM

UP TO 6M CLEAR OPENING / UP TO 450KG

2x CA4 RPS 8 Wheeled carriages | **2x 50B** Meeting points
2x 41BS Support wheels | **6M GIPI 4 RPZ 6** Cantilever track

WE STOCK A VAST RANGE OF GATE ROLLERS, GEAR RACK AND MANY OTHER GATE HARDWARE PRODUCTS.

Visit **www.rollingcenter.co.uk** or call **0113 201 6677** for more information.

x2

x2

x2

9m

8M PER LEAF

600kg

MEDIUM CANTILEVER SYSTEM

UP TO 8M CLEAR OPENING / UP TO 600KG

2x CA4 RS 8 Wheeled carriages | **2x 50P** Meeting points
2x 41PS Support wheels | **9M GIPI 5 RGZ** Cantilever track

WE STOCK A WIDE RANGE OF ASO SAFETY PRODUCTS.

Not only can we supply made to measure edges in all profiles, we supply components at competitive prices. Please contact us with your requirements

x2

x2


x2

12m

16M PER LEAF

1200kg

MAGNUM CANTILEVER SYSTEM

UP TO 16M CLEAR OPENING / UP TO 1200KG

2x CA4 RMS 8 Wheeled carriages | **2x 50G** Meeting points
2x 41GS Support wheels | **12M GIPI 6 RMZ 6** Cantilever track

FOR INFORMATION ON GATE AUTOMATION SYSTEMS TO WORK WITH THE CANTILEVER KITS.

See pages **4** - **9** for details.

CANTILEVER GATE HARDWARE

x2

x2


x2

12m

18M PER LEAF

2200kg

MAGNUM2 CANTILEVER SYSTEM
UP TO 18M CLEAR OPENING / UP TO 2200KG

2x CA4 RMS2 8 Wheeled carriages | **2x 50G** Meeting points
2x 41GS Support wheels | **12M GIPI 4 RM2C6** Cantilever track

NEED ASSISTANCE WITH CALCULATING YOUR CANTILEVER SYSTEM?
Contact us for assistance and details of our online cantilever calculator.

SUPER SILENT CANTILEVER GATE HARDWARE

x2

x2

x2

5.1m

3.5M PER LEAF

250kg

MICRO SILENT CANTILEVER SYSTEM
UP TO 3.5M CLEAR OPENING / UP TO 250KG

2x SILENT L 6 Wheeled carriages | **2x 50L** Meeting points
2x 41BL Support wheels | **5.1M GIPI 4 RLZ** Cantilever track

35% LESS NOISE.
Thanks to the MAPAR wheels, SUPER SILENT carriages reduce rolling noise in comparison to the traditional carriages.

x2

x2

x2

6m

6M PER LEAF

450kg

MINI SILENT CANTILEVER SYSTEM
UP TO 6M CLEAR OPENING / UP TO 450KG

2x SILENT P 8 Wheeled carriages | **2x 50B** Meeting points
2x 41BS Support wheels | **6M GIPI 4 RPZ** Cantilever track

LIGHTNESS & EFFICIENCY.
The lightness of MAPAR wheels means a low rolling strength and a lower level of energy needed to move the gate.

SUPER SILENT CANTILEVER GATE HARDWARE

x2

x2

x2

9m

8M PER LEAF

600kg

MEDIUM SILENT CANTILEVER SYSTEM

UP TO 8M CLEAR OPENING / UP TO 600KG

2x SILENT G2 8 Wheeled carriages | **2x 50P** Meeting points
2x 41PS Support wheels | **9M GIPI 5 RGZ** Cantilever track

CORROSION RESISTANT.

This particular nylon structure of SUPER SILENT carriage wheels has a higher corrosion strength compared to traditional materials.

x2

x2



x2

12m

16M PER LEAF

1200kg

MAGNUM SILENT CANTILEVER SYSTEM

UP TO 16M CLEAR OPENING / UP TO 1200KG

2x SILENT M 8 Wheeled carriages | **2x 50G** Meeting points
2x 41GS Support wheels | **12M GIPI 6 RMZ** Cantilever track

TEMPERATURE DURABILITY.

Thanks to MAPAR wheels, SUPER SILENT carriages are resistant to a variation of temperatures from -40 to +120 C.



CANTILEVER GATE ACCESSORIES

GLOECK

Tension rod.

50R

Adjustable cantilever Support roller,
147x60mm.
70mm dia roller.

50RM

Non adjustable cantilever Support roller.
220x65mm.
70mm dia roller.

DIMA 1

Adjustable cantilever fixing plate.

PF/B - P - G

Cantilever carriage fixing kits.

153 B - P - G

Nylon end caps for gipi track.

NEW

ALUMINIUM
A HIGH QUALITY MATERIAL

LA TOULOUSAINE

- LIGHT
- SHOCK RESISTANT
- 100% ENVIRONMENT FRIENDLY
- CORROSION RESISTANT

10 YEARS WARRANTY

FOR YOUR OWN SAFETY AND THAT OF YOUR CHILDREN, ALL OUR GATES COMPLY WITH EN 13241 + A1 STANDARDS.

PRODUCTS
YOU CAN RELY ON

LA TOULOUSAINE, 60 YEARS OF TRUST AND RELIABILITY

Over the past six decades La Toulousaine has gained considerable expertise in designing quality closure solutions you can rely on.

Our technical center and industrial premises are based in Toulouse, France, a city at the forefront of European engineering.

More than three hundred skilled technicians, designers and operators work together to provide our customers with the best products and solutions.

With more than a million solutions keeping homes and businesses secure throughout Europe, La Toulousaine is a top-of-the-range standard in the industry.

EXCLUSIVITÉ LA TOULOUSAINE EXCLUSIVITÉ

DESIGN & RELIABILITY

PATENTED
EXPERTISE

MECA'CLAV® ASSEMBLY SYSTEM

Over the past six decades La Toulousaine has gained considerable expertise in designing quality closure solutions you can rely on.

DURABILITY

Our innovative and patented assembly system provides lasting quality.

ROBUSTNESS

Based on multi-chamber profiles, our Méca'Clav® system gives our gates both exceptional resistance and the most elegant lines on the market.

PRIVACY RANGE

ELEGANT & PRIVATE DESIGN

Plain cladding with horizontal, vertical or diagonal slats. This range provides you and your family with privacy and security

BRISTOL

NEW

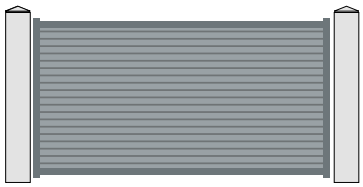

GLASGOW

NEW

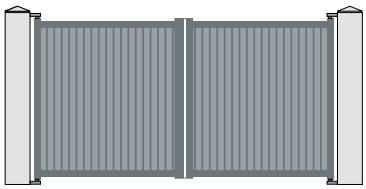

BELFAST

NEW

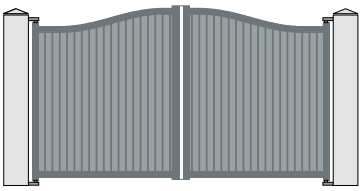

CARDIFF

NEW

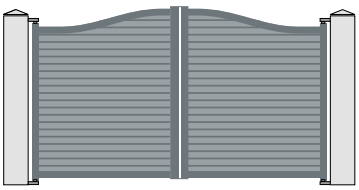

OXFORD

NEW

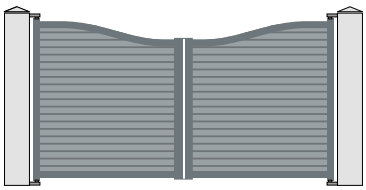

EDINBURGH

NEW

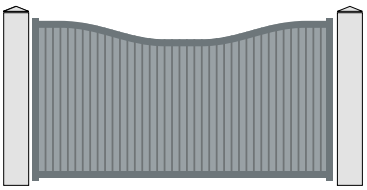

DOVER

NEW

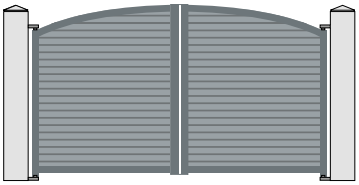

DUNDEE

NEW

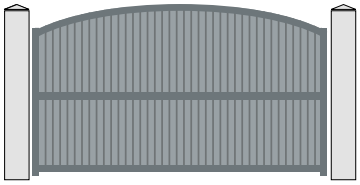

ARPEGGIO RANGE

STRIKES THE RIGHT NOTE

This range is available in a wide range of possible combinations. Visit our website for details of the full range.

VEERACRUZ

NEW

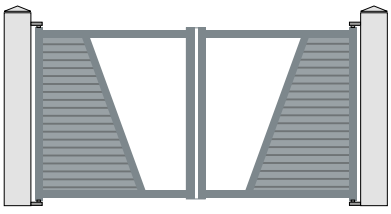

VENDOME

NEW

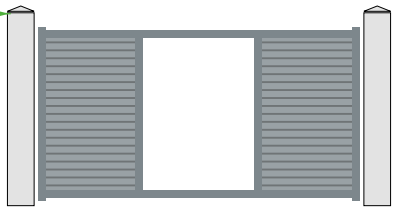

VILLEPARISIS

NEW

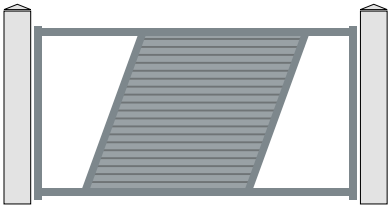

ACCORD RANGE

MODERN & SLEEK

Distinctly modern, with 250mm wide boards that bring a sleek design to your outdoor space. Please contact us for all options available,

JERSEY

NEW

GUERNSEY

NEW

GUERNSEY 1

NEW

AURIGNY

NEW

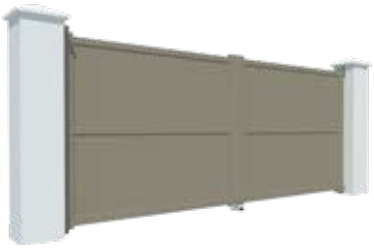

CHAUSEY

NEW

CHAUSEY 1

NEW

ACCESS RANGE

AN IDEAL SOLUTION FOR ALL BUDGETS

This line is designed to optimise your investment with no impact on quality.

CARCASSONNE

NEW

TOLOSA

NEW

TOLON

NEW

MARSELHA

NEW

DOMA

NEW

PEDESTRIAN GATE

NEW

HARMONY RANGE

GET THE PERFECT BALANCE

Based on slats or tubes, this range adds a lasting touch of elegance and class to your gates and enhances your property.

HELSINKI

NEW

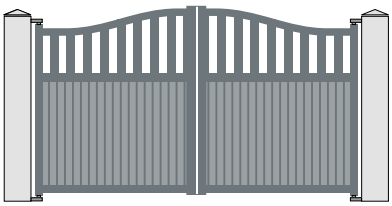

WILSON

NEW

HERACLES

NEW

MALAGA

NEW

HAWAI

NEW

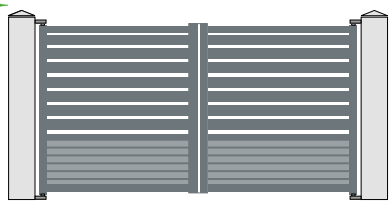

CAPITAL

NEW

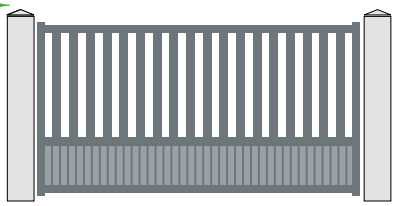

GATE OPTIONS

18 Standard colours to choose from.
Matt appearance with textured finish

White 9016	White 9010	Ivory 1015	Grey 7035	Grey 7031	Blue 5023	Blue 5003	Grey 7016	Green 6005
Red 3004	Brown 8003	Brown 8019	Black 9005	Brown 8011	Brown 8014	Grey 7006	Grey 7034	Green 6021

HARMONY

HORIZON

HARMONY

PRIVACY

DISCREET

CREATION

INTUITION

ARPEGGIO

COMPOSITE WOOD

CW COMPOSITE WOOD

Available in:

Grey
Brown
Black
Ash

Dimensions: 1830 x 145 x 19mm

PW COMPOSITE WOOD

Available in:

Anthracite Grey
Medium Oak
Black
Cedar

Dimensions: 2000 x 125 x 15mm

Rolling Center provides a range of options that will last a lifetime and will look good from the moment the tongue and groove is fitted. Our products require minimum maintenance other than the occasional wash down every now and then. Products are waterproof and UV stable to the strictest of standards.

- Stronger than any of the South American hardwoods and lighter than the lightest of the softwoods but with a consistently better look and finish.
- Can be formed into almost any shape and manufactured in any colour and finish, our synthetic woods can be nailed, screwed, glued, drilled, welded and sawed using standard woodworking tools.

D1500 MANUAL BARRIER

NEW

The D1500 manual raise arm barrier is a low maintenance cost effective way of manually controlling access to unauthorised areas.

With its clean modern appearance the D1500 is designed to compliment any environment and comes with a vast range of colour and design options.

The D1500 standard will span up to 7 metre and the HD will span up to 9.0 metre, Both use counter balance weights, fine tuned for ease of lifting. Dual barriers are also available with a central locking mechanism to suit wider spans.

Both standard and HD models come with an aluminium arm finished in a red/white vinyl wrapping (other colours available).

The unique design incorporates a steel lid which houses the bearings from all weathers and has an integral lockable slide latch for a sleeker appearance.

Each barrier can be custom designed to suit your requirements, with variety of colours and options. Standard colours are: red/white or black/yellow

- ✓ **Unique design**
- ✓ **Integral bearings**
- ✓ **Very sturdy**
- ✓ **Easy to install**

SPECIFICATION

Maximum span
Std 7.0 Metres
HD 9.0 Metres

Boom Diameter
Std 76mm
HD 100mm

Finish
Polyester powder coated

Dimensions
250mm Square box
400 x 400 Base plate
Pole height - 1metre from Base plate to centre.
Total barrier height - 1150mm

Optional extras
Bottom skirt
stop/no entry signs

Std barrier comes complete with
Tip support anchor shield bolts pole Llifting handle to assist

D3250 AUTOMATIC BARRIER

NEW

Rolling Center is proud to introduce the sleek new D3250 automatic barrier.

Developed from our industry D3200 barrier, the D3250 features proven reliability with an eye catching fresh new design.

The barrier is finished in a polyester powder coated two tone scheme with a choice of ral colours at no extra cost. For prestigious sites, brushed stainless steel covers are available.

Also available is a back-lit LED panel that can feature your company Logo or model designation. The colour changing LED Lights that can be programmed to act as traffic lights or just simply mood Lighting.

The barrier features 2 lockable, fully removable covers to provide complete access to the mechanism and control panel which simplifies maintenance when compared to conventional barriers.

Operation is by an inverter three phase driven motor which provides 100% continuous cycle rating. Control is by a Schneider PLC which enables programming of the operation parameters and compatibility with most access control systems.

Boom lengths of up to 7m are available, with opening times between 1.5 and 6 seconds depending on length.

The D3250 automatic barrier: The highest quality barrier produced in the UK with its sleek new looks and competitive prices.

SPECIFICATION

Maximum boom length
7.0 metres Plain pole
6.0 metres c/w bottom skirt
4.5 metres c/w Hi-bar skirt

Boom diameter
76mm

Opening/closing time
12.1 - 6 seconds

Drive Unit
3 Phase motor & wormed gearbox (Inverter driven)

Cycles
100% Continuous duty rating

Finish
Epoxy primed and polyester powder coated:

Power supply
230vac 50hz 6Amp

Dimensions
405 x 420 x 1140mm

D3800HD AUTOMATIC BARRIER

NEW

The D3800 heavy duty barrier is an automatic raise arm barrier which is designed to offer long term reliability, efficient smooth operation and maximum durability. This makes it ideal for applications where constant vehicle movements are experienced such as ports, airports and HGV parks.

Boom lengths of up to 9m are available, with opening times between 1.6 and 6 seconds depending on length. A slow down feature is incorporated which minimises wear on the mechanism and greatly reduces operating noise.

The barrier incorporates a 3-phase inverter driven motor and gearbox drive which provides smooth consistent operation with variable speed, all from a single phase supply. This is controlled via a Siemens PLC which can be programmed to suit any access control requirements and also features adjustable parameters such as timing to allow automatic opening during also features adjustable parameters such as timing to allow automatic closing times.

Safety features such as photocells and induction loops may be specified, and the barrier is compatible with any access control system.

Available options include upper and lower skirts to maximise the visibility of the barrier and prevent pedestrians passing under the boom, LED boom lights, Stop signs, LED traffic lights, and fixed or

- ✓ Rotalok rotation locking mechanism with anti-trap safety system
- ✓ Factory settings need no adjustment
- ✓ Very low maintenance
- ✓ Can handle high traffic volumes
- ✓ Helps employ strict security standards
- ✓ Can function in severe operating conditions
- ✓ Interior & exterior installations
- ✓ PLC controlled

SPECIFICATION

Maximum boom length
9.0 metres plain pole
8.0 metres c/w bottom skirt
6.5 metres c/w Hi-bar skirt

Boom diameter
100mm

Opening/closing time
4.0 - 9.0 seconds

Drive unit
3 Phase motor & wormed gearbox (Inverter driven)

Cycles
100% continuous duty rating

Finish
Epoxy primed and polyester powder coated:

Power supply
230vac 50hz 6Amp

Dimensions
505 x 505 x 1140mm

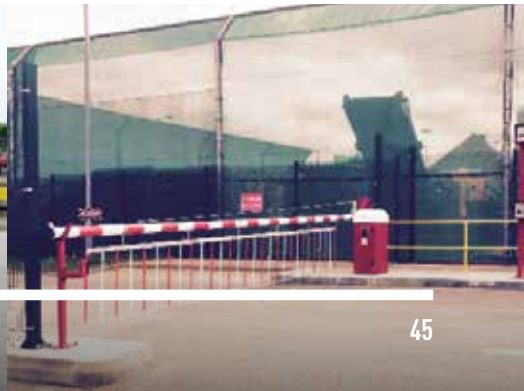

D5600 AUTOMATIC SLIDING GATE

NEW

The D5600 cantilever sliding gate is custom built to the individuals requirements and to the highest security specifications. These gates are mainly designed for high use sites but will compliment any business or home. A wide variety of infills are available from palisade to solid.

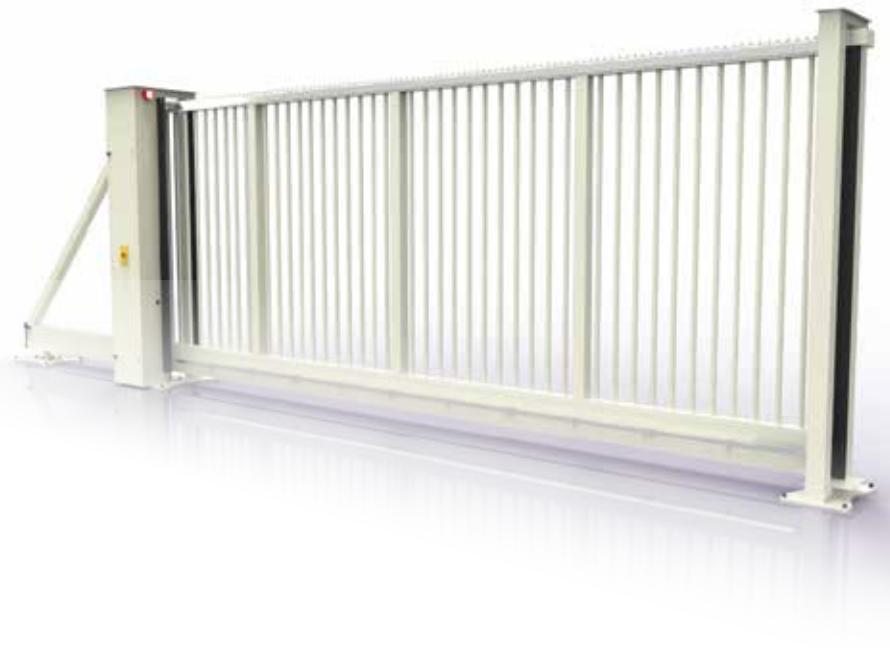

The 5600 series incorporates a 3-phase inverter motor/gearbox drive which provides smooth consistent operation with variable speed. This is all controlled via a Schneider PLC that can be programmed to suit any access control requirements and also features adjustable parameters that the customer can change to suit site needs. For example if you wanted to add traffic lights or change the access control at a later date then the gate can facilitate this without having to upgrade anything on the gate.

The result is a superior product giving long service life and peace of mind.

- ✓ 3 - PHASE INVERTER DRIVEN MOTOR
- ✓ FULLY SAFETY COMPLIANT
- ✓ 100% DUTY CYCLE
- ✓ LOW MAINTENANCE
- ✓ LOW POWER ACONSUMPTION
- ✓ CUSTOM DESIGNS AVAILABLE

SPECIFICATION

Maximum Span
12.0 Metres
Maximum height
3.5 metres
(Depending on span)
Opening/Closing time
5 seconds per metre
(Adjustable)

Slow down
Opening and closing
Drive Unit
3 - Phase Motor & wormed Gearbox - Rack and pinion
Safety
6 x Cat 3 Edges as std
Dual Photocells

Cycles
100 % Duty Cycle
Power supply
230vac 50hz 6Amp

D5800 AUTOMATIC SLIDING GATE

NEW

The D5800 heavy duty cantilevered sliding gates provide the optimum solution for vehicle entrance control at high security locations or facilities which experience a high level of vehicle movements.

Gates are manufactured to suit customer's individual requirements and sizes up to 12m width and 3.5m height are available as fully automated or manually operated types.

The infill design of gates can be modified to reflect the needs of individual projects and decorative or timber clad designs can be incorporated where the standard vertical bar infill is not required.

The automated versions of the D5800 sliding gates are inverter driven, 3 phase motor with rack and pinion final drive. This provides smooth operation and variable speed functions on the sliding gate. Fully compliant safety systems are fitted as standard, including Cat. 3 safety edges and twin photocells. Our safety systems are continually updated to maintain compliance with evolving legislation.

These heavy duty applications are ideal for securing industrial sites and popular for the span they are able to cover.

Full PLC control of the gate, with in house software design enables us to adapt the parameters of our gates to suit any operational requirements of our customers, and ensure compatibility with any access control system.

- ✓ 3 - PHASE INVERTER DRIVEN MOTOR
- ✓ FULLY SAFETY COMPLIANT
- ✓ 100% DUTY CYCLE
- ✓ LOW MAINTENANCE
- ✓ LOW POWER ACONSUMPTION
- ✓ CUSTOM DESIGNS AVAILABLE

SPECIFICATION

Maximum Span
12.0 Metres

Maximum height
3.5 metres
(Depending on span)

Opening/Closing time
5 seconds per metre
(Adjustable)

Slow down
Opening and closing

Drive Unit
3 - Phase Motor & wormed Gearbox - Rack and pinion

Safety
6 x Cat 3 Edges as std
Dual Photocells

Cycles
100 % Duty Cycle

Power supply
230vac 50hz 6Amp

D6000 AUTOMATIC SWING GATE

NEW

The D6000 swing gates are strong, tough, reliable and offer high security for commercial/industrial sites. Manufactured from hollow box section allowing us to construct bespoke designs with many infill's also available. Using only high quality heavy duty hinges all our gates swing/operate very smooth and efficient.

The D6000 manual versions have a vast range of locking facilities available from slide bolts to mortice locks.

The D6000 automatic versions come with either underground operators or our D380HD above ground operators depending on the size and spec of the gates. All our automatic gates come with Cat 3 safety edges and dual Photocells as standard. The control panels can be connected to any access control such as prox-readers, radio control, networked pc's and GSM technology.

All our gates are also fully tested in house to minimise time on site to ensure minimum disruption.

SPECIFICATION

Maximum Span
14.0 Metres (7m per leaf)
Maximum height
5 metres (
Depending on span)
Manual Locking
Slide latch or Locinox
Drive Options
1, **BFT Eli250** 24v
Intensive use leaves up to 3m
Cycle time - 15 secs

2, **BFT Giuno A50 Rams**
Intensive use Leaves up to 4m
Cycle time - 15 secs
3, **D350 underground**
100% duty cycle Leaves up to
5m Cycle time - 8 - 15 secs
4, **D380HD** above ground 100% duty cycle
Leaves up to 7m Cycle time - 8 - 15 secs

Safety
Cat 3 edges and dual Photocells as std to comply with BS EN 12453
Power supply
230vac 50hz 6Amp

D6100 PEDESTRIAN GATE

NEW

The D6100 pedestrian gate is produced in a wide variety of formats, from simple pad-lockable gates to fully DDA compliant automated pedestrian access points. Typical applications include fire escape gates with push to exit panic hardware, DDA compliant gates for ease of access for wheelchair users and baby buggies along with simple site security gates and factory entrances.

Our gates are available in both single or double leaf types and with dig in or bolt down posts. A range of infill options exist, from vertical bar, weldmesh, or even timber cladding or decorative steel designs. This allows us to match your existing site or corporate identification.

The pedestrian gate formats are constructed from mild steel with fully welded joints and tamper resistant hinges. They are offered with an oxy-primed and epoxy paint system which is available in any RAL colour. Where required they are also available with a galvanised finish.

As with our larger vehicle access gates, pedestrian gates can be fitted with any type of access control hardware either stand alone or fully networked into an existing system. Automated pedestrian gates are fitted with hydraulic rams or underground drives, and are fitted as standard with full safety systems, including leading edge buffers to comply with all current and emerging safety legislation. Manual gates are usually supplied with slip latches for padlocking or for access controlled gates, magnetic locks with self closers are usually specified.

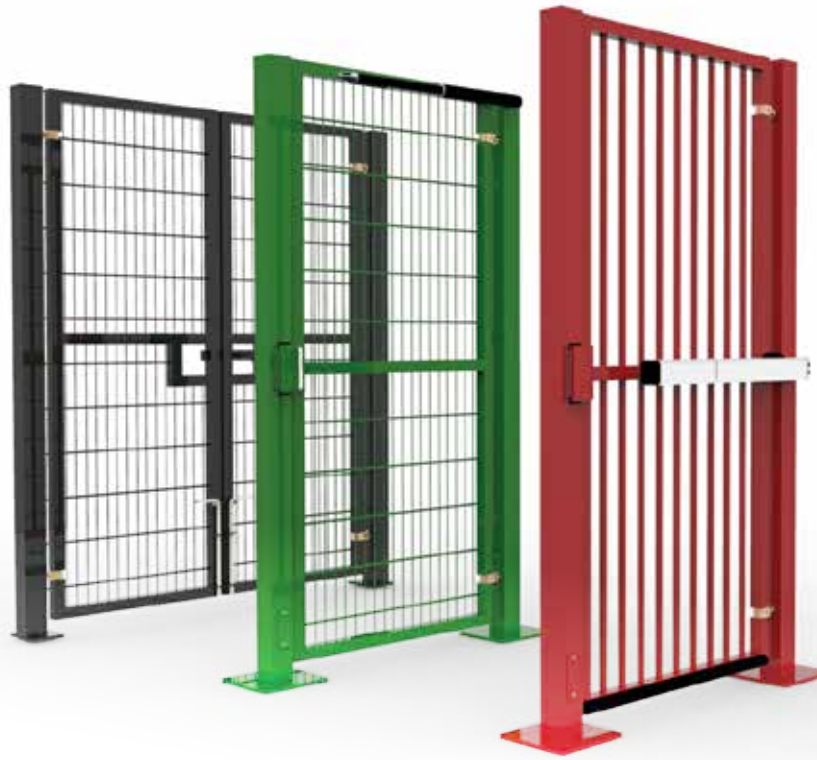

AUTOMATED SPECIFICATION

Maximum Span
2 Metres

Maximum height
3.5 Meters

Opening/closing time
10 Seconds

Drive unit
230v Hydraulic under ground motor / ram

Safety
2 x Cat 3 Edges as std
dual photocells as std

Power supply
230 v ac 50hz 6amp

MANUAL / SEMI AUTO SPECIFICATION

Maximum span
2 Metres

Maximum height
3.5 Meters

Manual locking
Locinox sliding lock

Semi auto locking
ES400kg Maglock

Hinges
Wrap around

Finish
Epoxy primed & powder coated

D6500 BI-FOLDING SPEED GATE

NEW

Bi-folding speed gate, the new range of bi folding gates from Rolling Center provide the perfect solution for security in confined locations, or where speed of opening is important giving twice the span in an opening space.

This increased speed also ensures that site entrances are open for the minimum amount of time possible to allow authorised users to access without allowing unauthorised persons to enter. Commonly chosen for applications such as multi storey car parks, prison entrances and corporate access roads, they provide an aesthetically pleasing, high security entrance control solution. The design incorporates two mechanically connected leaves per side, which swing open together thus providing a greater speed of operation than other automated gate systems.

They are fitted with our reliable heavy duty drive systems which are almost silent in operation and have an impeccable service record with maximum longevity in the most demanding environments. The small swing arc needed by the dual gate leaf system allows these gates to be located in situations which would rule out the installation of conventional gates.

SPECIFICATION

Maximum span
8.0 Metres
Maximum height
3.5 metres
(Ddepending on span)
Opening/closing time
50 seconds

Drive unit option 1
230v Hydraulic under ground motor
Drive unit option 2
3 - Phase motor & wormed gearbox -(Inverter driven)

Safety
6 x Cat 3 Edges as std dual photocells
Power supply
230vac 50hz 6Amp

D8400 AUTOMATIC RISING KERB

NEW

The D8400 rising kerb barrier is essentially a hinged barrier rising above the road surface to prevent unauthorised access. We manufacture all sizes from 2m up to 5m but can double up to 12m wide. We also offer a single kerb with the attack face on both sides if required.

Our 3-phase motor driven hydraulic power pack which is mounted within the control cabinet, provides motive power for raising and lowering action.The kerb is fitted with raise and lower proximity switches which cable back to the control with the hydraulic hoses.

As all sites vary, the kerbs are controlled via a programmable logic controller, which means it's compatible with all types of access control and can be operated to the customers exact specification.

SPECIFICATION

Construction
All welded Steel RHS

Cover Plates
8mm 'Durba' plates

Drive
Remote Hydraulic power pack

Power Supply
230v supply

Sizes
2m - 5m Single kerbs

Control System
Siemens PLC and Inverter Lifting height

Lifting Height
340mm - 800mm

Hand Operation
Lowering as standard with Manual release handle.s

Motor
0.75KW - 1.1KW

Operating tTime
1.2 Seconds - 8 Seconds

Max Axle Load
12 tonne

100mm and 200mm LED Traffic Lights Available

Options For Access Control

Keypad
Proximity Card
Voice/Video Intercom Access
Remote Control
Keyswitch
Push Button (Raise/Stop/Lower)
Inductive Loops/Photocells
Token Acceptor

D4150 FULL HEIGHT TURNSTYLE

NEW

The D4150 full height turnstile is a very high specification turnstile that is suitable for controlling access in environments such as reception areas, public buildings, theme parks, stadiums and construction sites etc.

These turnstiles are extremely robust, they can be formed into a double and are manufactured in the UK. These turnstiles if wished can be tailor made to your requirements; such as heights, access plates, stainless rotors, colours etc.

The D4150 can be configured as fail safe or fail secure, It also comes with over ride keyswitches as standard. Also as standard comes a Schnieder PLC Controller that has various parameter options such as entry/exit timeclock that is very installer friendly.

- ✓ Rotalok rotation locking mechanism with anti-trap safety system
- ✓ Factory settings need no adjustment
- ✓ Very low maintenance
- ✓ Can handle high traffic volumes
- ✓ Helps employ strict security standards
- ✓ Can function in severe operating conditions
- ✓ Interior & exterior installations
- ✓ PLC controlled

SPECIFICATION

Power supply

230vac 50hz 6Amp

Arms & body

Primed/Ppowder coated finish

Dimensions

1520 x 1360 x 2230 mm

D4200 FULL HEIGHT TURNSTYLE

NEW

The D4200 full height turnstile is a very high specification turnstile that's suitable for controlling access in environments such as reception areas, public buildings, theme parks, stadiums and construction sites etc.

The D4200 turnstiles are extremely robust, they can be formed into a double and are manufactured in the UK. These turnstiles if wished can be tailor made to your requirements; such as heights, access plates, stainless rotors, colours, etc.

The D4200 turnstile is a very unique design that incorporates a canopy as standard. Also as standard comes a Schneider plc which has a built in time clock and various parameters that puts the D4200 above the rest.

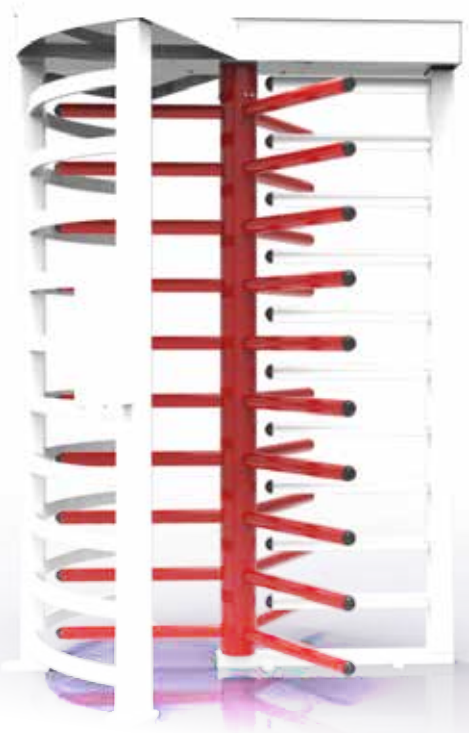

- ✓ Rotalok rotation locking mechanism with anti-trap safety system
- ✓ Factory settings need no adjustment
- ✓ Very low maintenance
- ✓ Can handle high traffic volumes
- ✓ Helps employ strict security standards
- ✓ Can function in severe operating conditions
- ✓ Interior & exterior installations
- ✓ PLC controlled

SPECIFICATION

Power supply

230vac 50hz 6Amp

Arms & body

Primed/powder coated finish

Dimensions

1520 x 1360 x 2230 mm

D2300 AUTOMATIC HEIGHT RESTRICTOR

NEW

The D2300 sliding height restrictor was purposely designed for caravan parks to prevent caravans being stolen while still allowing access for low vehicles. Aswell as being very successful on caravan parks these height restrictors are the perfect solution to control access of certain height vehicles to any site.

The D2300 can be built to individual requirements such as infill's, box section sizes etc. All our height restrictors are drawn up so the customer can visualise the look and approve for manufacture.

The D2300 is controlled via a Siemens PLC which can be programmed to work to the customers exact requirements, with many access control options available such as keypads, proximity readers, radio fobs etc. All our D2300's come with CAT3 safety edges and dual photocells which makes them comply with safety standards thus giving the customer piece of mind.

The D2300 is all manufactured in Nottinghamshire and is set up and tested in house to minimise install time on site, thus causing the customer minimum disruption.

SPECIFICATION

Maximum span
14 Metres

Maximum height
3 Meters depending on span

Opening/closing time
5 Seconds per metre adjustable

Drive unit
3 Phase motor & wormed gearbox rack and pinion

Safety
Category 3 Bircher edges dual height photocells

Cycles
100 % Duty cycle

Dimensions
1000mm x 600mm

Power supply
230 v ac 50hz 6amp

D120 ACCESS READER POST

NEW

The D210 access post is strong, easy to install and can be manufactured to individual requirements. The box style head gives the installer room to make connections and even the option of fitting additional equipment such as controllers in the post.

SINGLE HEIGHT SPECIFICATION

Height
1255m5
Facia plate
290 x 190mm
Max width
200mm
Max depth
250mm
Post
80 x 80 x 3mm box
Base plate
250 x 250 x 10mm
Finish
Galvanised or powder coated

SLORRY / DUAL HEIGHT SPECIFICATION

Height
2225mm
Facia plate
290 x 190mm
Max width
200mm
Max depth
250mm
Post
80 x 80 x 3mm box
Base plate
250 x 250 x 10mm
Finish
Galvanised or powder coated

TEL. 0113 201 6677
FAX. 0113 201 6688
INFO@ROLLINGCENTER.CO.UK
WWW.**ROLLINGCENTER.**CO.UK

Rolling Center UK Ltd
Unit 5, South Leeds Trade Centre
Belle Isle Road
Hunslet
Leeds
LS10 2DL

DHF
Powered Gate Group