

# '22

2022 TRADE CATALOGUE

GATE HARDWARE  
GATE AUTOMATION  
ACCESS CONTROL  
GATE SAFETY  
ALUMINIUM GATES

TEL. 0113 201 6677



# CONTENTS

# ROLLING CENTER 2022

# TRADE CATALOGUE

	ABOUT US	4
SECTION A	GATE AUTOMATION	7
SECTION B	SAFETY PRODUCTS	59
SECTION C	ACCESS CONTROL	83
SECTION D	INTERCOMS	111
SECTION E	LOCKS & CLOSERS	143
SECTION F	SWING GATE HARDWARE	179
SECTION G	SLIDING GATE HARDWARE	199
SECTION H	CANTILEVER GATE HARDWARE	215
SECTION I	ALUMINIUM GATES	235
SECTION J	COMPOSITE FENCE BOARDS	257
SECTION K	COMPLETE GATE SYSTEMS	261



# TRADE CATALOGUE 2022

With thousands of gate hardware and gate automation products, barriers, safety kits, access control, locks, closers and intercoms, Rolling Centre is your go-to supplier for all things gate related. Here, we'll introduce you to our best selling lines and demonstrate the breadth of our range, but for everything else, our website has the full range of products and solutions: **[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)** or our experienced and friendly team will be able to help you by calling **0113 201 6677**.

Thank you for your continued support.

---

## Join our Aluminium Gates trade partner programme

We're the exclusive distributor of La Toulousaine, Europe's no.1 manufacturer of high quality aluminium gates, with a wide selection of styles, designs, colours and finishes plus an impressive 25 year warranty on all our aluminium gates! We welcome applications from new trade installers wanting to join our partner network as an approved Rolling Centre Aluminium Gates installer. Visit **[rollingcenter.co.uk/aluminium-gates-uk#enquiry-form](http://rollingcenter.co.uk/aluminium-gates-uk#enquiry-form)** to sign up.





## Why choose Rolling Center

- Free pre-sale and post-sale technical support available by phone, email, online chat and WhatsApp
- Large stockholding
- Independent and unbiased towards any brand
- Competitive trade pricing
- Fast delivery and Click & Collect
- Order online, by phone or visit our Trade Counter
- Showroom & Training Centre with product displays, samples, demonstrations and training
- Regular supplier open days to learn, network and gain a competitive edge
- Regular product offers and exclusive trade deals

## Brands we supply



... Plus many more

# '22

2022 TRADE CATALOGUE

GATE HARDWARE  
GATE AUTOMATION  
ACCESS CONTROL  
GATE SAFETY  
ALUMINIUM GATES

TEL. 0113 201 6677

# SECTION A

# GATE AUTOMATION

HIGH SPEED SLIDING AUTOMATION	8
SLIDING AUTOMATION	10
GEAR RACK	17
HIGH SPEED UNDERGROUND SWING AUTOMATION	18
UNDERGROUND SWING AUTOMATION	20
UNDERGROUND HYDRAULIC SWING AUTOMATION	30
HIGH SPEED ABOVE GROUND AUTOMATION	32
ABOVE GROUND SWING AUTOMATION	34
ABOVE GROUND HYDRAULIC SWING AUTOMATION	44
ABOVE GROUND ARTICULATED SWING AUTOMATION	48
BARRIER AUTOMATION	50
BOLLARD AUTOMATION	52
TRANSMITTERS	55
RECEIVERS	57



## NICE ROBUS HIGH SPEED

1 x **RB500HS HIGH SPEED** Operator  
2 x **ON2E** 2 Channel transmitters  
1 x Pair of **EPMB** Photocells  
1 x **OXIBD** 4 Channel bi-directional receiver



### NICE ROBUSHS KIT - 24v High speed sliding gate automation up to 500kg


ROBUS500HS-KIT

Irreversible - electromechanical limits - built in control unit - 24vdc - gates up to 500kg

#### SPARES & ACCESSORIES

RB500HS	Motor - Irreversible - electromechanical limits - built in control unit - 24vdc - gates up to 500kg
RBA3/HS	Spare control unit for ROBUSHS motor
PS124	24vdc battery backup with integrated charger
O-VIEW	Programming & diagnostic unit with BUS T4 connection

#### TECHNICAL INFO:

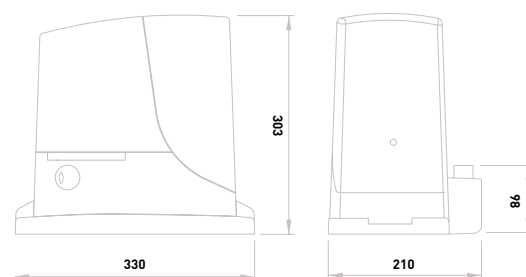

#### IDEAL FOR INTENSIVE USE

4 m gate takes around  
9\* seconds with RB500HS.



Dimensions in: mm		ROBUS HIGH SPEED SLIDING MOTOR UP TO 500KG	
ELECTRICAL DATA		RB500HS	
POWER SUPPLY		230 VAC 50/60 HZ	
MOTOR SUPPLY		24VDC	
CURRENT		2.2	
PERFORMANCE DATA			
SPEED (M/S)		0.44	
FORCE (N)		360	
WORK CYCLE (CYCLES PER HOUR)		20	
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL		IP44	
WORKING TEMP (°C MIN/MAX)		-20 - +50	
DIMENSIONS (MM)		330 X 210 X 303	
MOTOR WEIGHT (KG)		11	

**WE STOCK A VAST  
RANGE OF GATE  
ROLLERS, GEAR  
RACK AND MANY  
OTHER GATE  
HARDWARE  
PRODUCTS**

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)  
or call 0113 201 6677  
for more information.

#### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER				TRANSMITTER						PHOTOCELLS										LIGHT				
	Built-in*	OXI	OXIBD	OXILR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EPSB	EPMB	EPLB	EPN0W	EPN0R	F210	FT210	F210B	FT210B	ELAC	ELDC	WLT
RB500HS		•	•	•	•	•	•	•	•	•				•	•	•	•	•			•	•		•	•



## NICE RUN1200HS KIT - 24v High speed sliding gate automation up to 1200kg

RUNKIT1200HS

Irreversible - electromechanical limits - built in control unit - 24vdc - gates up to 1200kg

### SPARES & ACCESSORIES

RUN1200HS	Motor - irreversible - electromechanical limits - built in control unit - 24vdc - gates up to 1200kg
RUA6	Spare control unit for RUN1200HS motor
B12-B	12v 6ah battery for use with PS524 charge card
PS524	Charge card for 7ah batteries
O-VIEW	Programming & diagnostic unit with BUS T4 connection



## NICE RUN HIGH SPEED


1 x RUN1200HS HIGH SPEED Operator  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
1 x OXIBD 4 Channel bi-directional receiver

### TECHNICAL INFO:



### RAPID MANOEUVRES

Opening a 7m gate takes around 18 seconds with RUN1200HS.

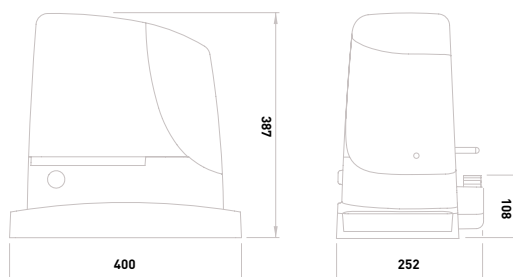

Dimensions in: mm

### RUN HIGH SPEED SLIDING MOTOR UP TO 1200KG

ELECTRICAL DATA		RUN1200HS
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		2A
PERFORMANCE DATA		
SPEED (M/S)		0.37
FORCE (N)		790
WORK CYCLE (CYCLES PER HOUR)		60
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS (MM)		400 X 225 X 387
MOTOR WEIGHT (KG)		24.5

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER				TRANSMITTER						PHOTOCELLS										LIGHT			
	Built-in*	OXI	OXIBD	OXILR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPIM	EPL	EP5B	EPMB	EPLB	EPWOW	EPWOB	F210	F210B	F210B	ELAC	ELDC	WLT
RUN1200HS		•	•	•	•	•	•	•	•	•				•	•	•	•	•			•	•	•	•

### VIDEX 4G GSM INTERCOM WITH KEYPAD



Turn to page 130



## NICE SLIGHT KIT


**1 x SLH400** Operator  
**2 x ON2E** 2 Channel transmitters  
**1 x Pair of EPMB** Photocells  
**1 x ELDC** Flashing light  
**1 x OXIBD** 4 Channel bi-directional receiver



### NICE SLIGHT KITS - 24v sliding gate automation up to 400kg, 6m gate length max

SLH400BDKCE	Irreversible - absolute encoder - built-in LED light & control unit - gates up to 400kg, 6m max
<b>SPARES &amp; ACCESSORIES</b>	
SLH400	Motor - Irreversible - absolute encoder - built-in LED light & control unit - gates up to 400kg, 6m max
SPNKA3R10	Spare control unit for SLH400 motor
PS124	24vdc battery backup with integrated charger
O-VIEW	24vdc Programming & diagnostic unit with BUS T4 connection backup with integrated charger

### TECHNICAL INFO:



Dimensions in: mm		SLIGHT SLIDING GATE OPERATOR 400KG UP TO 6M
ELECTRICAL DATA		SLH400
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		1.1A
PERFORMANCE DATA		
SPEED (M/S)		0.34
FORCE (N)		400
WORK CYCLE (CYCLES PER HOUR)		35
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS (MM)		198 X 191 X 408
MOTOR WEIGHT (KG)		6.5

### NICE O-VIEW GATE AUTOMATION PROGRAMMING UNIT



Turn to page **109**

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER				TRANSMITTER						PHOTOCELLS										LIGHT				
	Built-in*	OXI	OXIBD	OXILR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EPSB	EPMB	EPLB	EPN0W	EPN0R	F210	FT210	F210B	FT210B	ELAC	ELDC	WLT
SLH400		•	•	•	•	•	•	•	•	•				•	•	•	•	•			•	•		•	•



## NICE NAKED KITS - 24v concealed motor sliding gate automation up to 400kg

NAKEDKIT1

Irreversible - absolute encoder - built in control unit - 24vdc - gates up to 400kg

### SPARES & ACCESSORIES

NKSL400

Motor - Irreversible - absolute encoder - built in control unit - 24vdc - gates up to 400kg

SPNKA3R10

Spare control unit for NKSL400 motor

PS124

24vdc battery backup with integrated charger

O-VIEW


24vdc Programming & diagnostic unit with BUS T4 connection backup with integrated charger



## NICE NAKED KIT

1 x **NKSL400** Operator  
2 x **ON2E** 2 Channel transmitters  
1 x **Pair of EPMB** Photocells  
1 x **OXIBD** 4 Channel bi-directional receiver

### TECHNICAL INFO:



Dimensions in: mm

### NAKED SLIDING GATE OPERATOR 400KG UP TO 6M

ELECTRICAL DATA		NKSL400
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		1.1A
PERFORMANCE DATA		
SPEED (M/S)		0.34
FORCE (N)		400
WORK CYCLE (CYCLES PER HOUR)		35
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS (MM)		131 X 135 X 405
MOTOR WEIGHT (KG)		6.5

\*The protection degree of the automation is determined by the composition motor and column.

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER				TRANSMITTER						PHOTOCELLS										LIGHT			
	Built-in*	OXI	OXIBD	OXILR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EP8B	EPMB	EPLB	EPWOW	EPMOR	F210	F210B	F210B	F210B	ELAC	ELDC
NSKL400		•	•	•	•	•	•	•	•	•				•	•	•	•	•			•	•	•	•

**NEED ASSISTANCE WITH CALCULATING YOUR CANTILEVER SYSTEM?**

Contact us for assistance and details of our online cantilever calculator.



## NICE ROBUS KIT 1

1 x **RB600** Operator  
 2 x **ON2E** 2 Channel transmitters  
 1 x Pair of **EPMB** Photocells  
 1 x **OXIBD** 4 Channel bi-directional receiver



## NICE ROBUS KIT 3


1 x **RB1000** Operator  
 2 x **ON2E** 2 Channel transmitters  
 1 x Pair of **EPMB** Photocells  
 1 x **OXIBD** 4 Channel bi-directional receiver



### NICE ROBUS KITS - 24v sliding gate automation 600 -1000kg

ROBUSKIT1	Irreversible - built-in control unit - electromechanical limits - 24vdc - gates up to 600kg
ROBUSKIT3	Irreversible - built-in control unit - electromechanical limits - 24vdc - gates up to 1000kg
<b>SPARES &amp; ACCESSORIES</b>	
RB600	Motor - irreversible - built-in control unit - electromechanical limits - 24vdc - gates up to 600kg
RB1000	Motor - irreversible - built-in control unit - electromechanical limits - 24vdc - gates up to 1000kg
SPRBA3R10	Spare control unit for ROBUS RB600 & 1000 motor
PS124	24vdc battery backup with integrated charger
O-VIEW	Programming & diagnostic unit with BUS T4 connection

### TECHNICAL INFO:

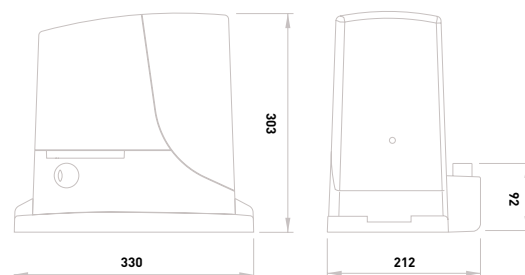

Dimensions in: mm		ROBUS SLIDING MOTOR UP TO 600/1000KG	
ELECTRICAL DATA		RB600	RB1000
POWER SUPPL		230VAC 50/60 HZ	230VAC 50/60 HZ
MOTOR SUPPLY		24VDC	24VDC
CURRENT		2.5A	2.3A
PERFORMANCE DATA			
SPEED (M/S)		0.31	0.28
FORCE (N)		600	900
WORK CYCLE (CYCLES PER HOUR)		40	50
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL		IP44	IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50	-20 - +50
DIMENSIONS (MM)		330 X 303 X 212	330 X 303 X 212
MOTOR WEIGHT (KG)		11	13

### ROLLING CENTER CANTILEVER GATE KITS



Turn to page **216**

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER				TRANSMITTER							PHOTOCELLS										LIGHT			
	Built-in*	OXI	OXIBD	OXILR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EPSB	EPMB	EPLB	EPNOW	EPMOR	F210	FT210	F210B	FT210B	ELAC	ELDC	WLT
RB600		•	•	•	•	•	•	•	•	•				•	•	•	•	•			•	•		•	•
RB1000		•	•	•	•	•	•	•	•	•				•	•	•	•	•			•	•		•	•





## NICE RUN KITS - 24v & 230v sliding gate automation 1500 - 1800kg

RUNKIT1	Irreversible - built-in control unit - electromechanical limits - 24vdc - gates up to 1500kg
RUNKIT2	Irreversible - built-in control unit - electromechanical limits - 230v - gates up to 1800kg
<b>SPARES &amp; ACCESSORIES</b>	
RUN1500	Motor - irreversible - built-in control unit - electromechanical limits - 24vdc - gates up to 1500kg
RUN1800	Motor - irreversible - built-in control unit - electromechanical limits - 230v - gates up to 1800kg
SPRBA3R10	Spare control unit for RUN1500 24v motor
RUA1	Spare control unit for RUN1800 230v motor
PS124	24vdc battery backup with integrated charger for RUN1500
O-VIEW	Programming & diagnostic unit with BUS T4 connection



### NICE RUN KIT 1


**1 x RUN1500** Operator  
**2 x ONZE** 2 Channel transmitters  
**1 x Pair of EPMB** Photocells  
**1 x OXIBD** 4 Channel bi-directional receiver



### NICE RUN KIT 2

**1 x RUN1800** Operator  
**2 x ONZE** 2 Channel transmitters  
**1 x Pair of EPMB** Photocells  
**1 x OXIBD** 4 Channel bi-directional receiver

## TECHNICAL INFO:

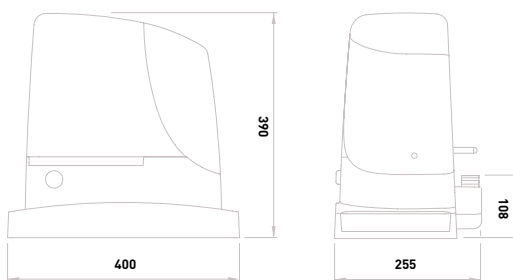

Dimensions in: mm

#### RUN SLIDING MOTOR 1500KG UP TO 1800KG

ELECTRICAL DATA		RUN1500	RUN1800
POWER SUPPLY		230VAC 50/60 HZ	230VAC 50 HZ
MOTOR SUPPLY		24VDC	-
CURRENT		2A	3A
PERFORMANCE DATA			
SPEED (M/S)		0.25	0.17
FORCE (N)		1000	1110
WORK CYCLE (CYCLES PER HOUR)		60	42
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL		IP44	IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50	-20 - +50
DIMENSIONS (MM)		400 X 255 X 390	400 X 255 X 390
MOTOR WEIGHT (KG)		19	24.5

\*60Hz version available on request.

## COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER				TRANSMITTER						PHOTOCELLS										LIGHT			
	Built-in*	OXI	OXIBD	OXLR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EPSE	EPMB	EPLB	EPMOV	EPMOR	F210	F210B	F210B	F210B	ELAC	ELDC
RUN1500		•	•	•	•	•	•	•	•	•				•	•	•	•	•			•	•	•	•
RUN1800		•	•	•	•	•	•	•	•	•				•	•	•	•	•			•	•	•	•

**INTERESTED IN AN ALUMINIUM GATE? TAKE A LOOK AT OUR FULL RANGE OF MADE TO MEASURE ALUMINIUM GATES**

See page **235** for details



## NICE RUN KIT 4

1 x RUN2500 Operator  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
1 x OXIBD 4 Channel bi-directional receiver



## NICE RUN KIT 6


1 x RUN 2500I Operator with inverter  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
1 x OXIBD 4 Channel bi-directional receiver



### NICE RUN KITS - 230v sliding gate automation up to 2500kg

RUNKIT4	Irreversible - built-in control unit - electromechanical limits - 230v - gates up to 2500kg
RUNKIT6	Irreversible - built-in control unit & inverter - electromechanical limits - 230v - gates up to 2500kg
<b>SPARES &amp; ACCESSORIES</b>	
RUN2500	Motor - irreversible - built-in control unit - electromechanical limits - 230v - gates up to 2500kg
RUN2500I	Motor - irreversible - built-in control unit & inverter - electromechanical limits - 230v - gates up to 2500kg
RUA1	Spare control unit for RUN1800 & 2500 motor
RUA2	Spare control unit for RUN2500I motor
RUA3	Spare inverter unit for RUN2500I
O-VIEW	Programming & diagnostic unit with BUS T4 connection

### TECHNICAL INFO:

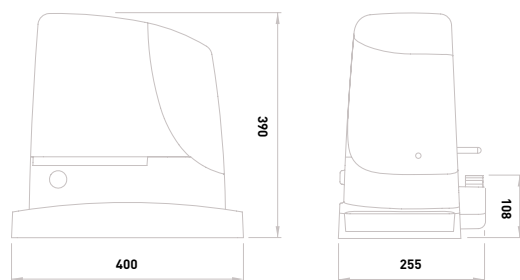

Dimensions in: mm			
RUN SLIDING MOTOR UP TO 2500KG			
ELECTRICAL DATA		RUN2500	RUN2500I
POWER SUPPLY		230VAC 50*HZ	230VAC 50/60 HZ
MOTOR SUPPLY		-	-
CURRENT		3.8A	3.7A
PERFORMANCE DATA			
SPEED (M/S)		0.17	0.26
FORCE (N)		1390	1660
WORK CYCLE (CYCLES PER HOUR)		42	56
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL		IP44	IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50	-20 - +50
DIMENSIONS (MM)		400 X 255 X 390	400 X 255 X 390
MOTOR WEIGHT (KG)		24.5	25

\*60Hz version available on request.

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER				TRANSMITTER						PHOTOCELLS												LIGHT		
	Built-in*	OXI	OXIBD	OXILR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EPSB	EPMB	EPLB	EPN0W	EPN0R	F210	F210	F210B	F210B	ELAC	ELDC	WLT
RUN2500		•	•	•	•	•	•	•	•	•				•	•	•	•	•			•	•	•	•	•
RUN2500I		•	•	•	•	•	•	•	•	•				•	•	•	•	•			•	•	•	•	•

**ASO RESISTIVE  
SAFETY EDGES**



Turn to page **71**



## BENINCA KBULL 624 ESA & 624 TURBO- 24v sliding gate automation up to 600kg

KBULL624ESA	Electromechanical limits - built-in encoder & receiver - 24vdc - gates up to 600kg
KBULL624T	Turbo - electromechanical limits - built-in encoder & receiver - 24vdc - gates up to 600kg
<b>SPARES &amp; ACCESSORIES</b>	
BULL624ESA	Motor - electromechanical limits - built-in encoder & receiver - 24vdc - gates up to 600kg
BULL624T	Turbo motor - electromechanical limits - built-in encoder & receiver - 24vdc - gates up to 600kg
9688131	Control unit for BULL624ESA motor & transformer
CP.B24TURBO	Control unit for BULL624T motor
BULL624T.BB	Battery back up for BULL624TURBO



## BENINCA KBULL624ESA KIT

- 1 x BULL624ESA Operator
- 1 x CP.B24ESA Built-in control panel
- 2 x TO.G02VA 2 Channel transmitters
- 1 x Pair of PUPILLA Photocells
- 1 x AWO Aerial



## BENINCA KBULL624 TURBO KIT


- 1 x BULL624T Operator
- 1 x CP.B24TURBO Built-in control panel
- 2 x TO.G02VA 2 Channel transmitters
- 1 x Pair of PUPILLA Photocells
- 1 x AWO Aerial

## TECHNICAL INFO:



### RAPID MANEUVERS

Opening a 7m gate can take around 16 seconds with the BULL624 TURBO.

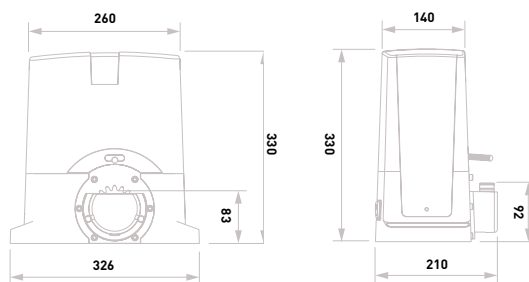

Dimensions in: mm		
BULL624ESA & 624 TURBO SLIDING MOTOR UP TO 600KG		
ELECTRICAL DATA	BULL624ESA	BULL624 TURBO
POWER SUPPLY	230VAC 50/60 HZ	115 / 230VAC 50/60 HZ
MOTOR SUPPLY	24VDC	24VDC
CURRENT	0.5A	3A
PERFORMANCE DATA		
SPEED (M/S)	0.1625 MAX	0.425 MAX
FORCE (N)	857	330
DUTY CYCLE	INTENSIVE USE	60%
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL	IP44	IP44
WORKING TEMP (°C MIN/MAX)	-20 - +50	-20 - +50
DIMENSIONS (MM)	330 X 326 X 210	330 X 326 X 210
MOTOR WEIGHT (KG)	11.7	10

## COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER		TRANSMITTER				PHOTOCELLS			LIGHT	
	Built-in*		TO.G0 VA	TO.G0 AK	IRI TX VA	IRI TX AK	PUPILLA	PUPILLA T	PUPILLA B	LAMP1ED	IRI.LAMP
BULL624ESA	•		•	•	•	•	•	•	•	•	•
BULL624TURBO	•		•	•	•	•	•	•	•	•	•

**NEED PRE OR POST  
SALES TECHNICAL  
SUPPORT?  
OUR FRIENDLY  
TEAM ARE HERE TO  
HELP**

Call us on  
0113 201 6677 or email  
Info@rollingcenter.co.uk

**BENINCA  
KBULL1224 TURBO KIT**

1 x **BULL1224T** Operator  
 1 x **CP.B24TURBO** Built-in control panel  
 2 x **TO.G02VA** 2 Channel transmitters  
 1 x Pair of **PUPILLA** Photocells  
 1 x **AWO** Aerial

**BENINCA KBULL 1224 TURBO- 24v sliding gate automation up to 1200kg****KBULL1224T**

Turbo - electromechanical limits - built-in encoder &amp; receiver - 24vdc - gates up to 1200kg

**SPARES & ACCESSORIES****BULL1224T**


Motor - turbo - electromechanical limits - built-in encoder &amp; receiver - 24vdc - gates up to 1200kg

**CP.B24TURBO**

Spare control unit for BULL1224TURBO motor

**BULL1224.TBB**

Battery back up for BULL1224TURBO

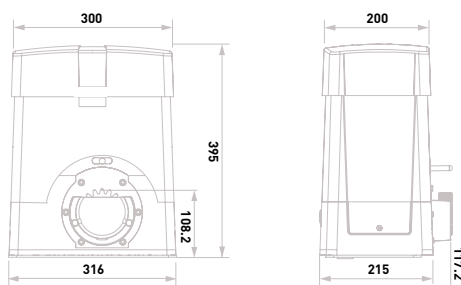**RAPID MANEUVERS**

Opening a 7m gate can take around  
 17 seconds with the BULL1224 TURBO.



Dimensions in: mm

**BULL1224 TURBO SLIDING MOTOR UP TO 1200KG**

<b>ELECTRICAL DATA</b>		<b>BULL1224 TURBO</b>
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		3A
<b>PERFORMANCE DATA</b>		
SPEED (M/S)		<b>0.408 MAX</b>
FORCE (N)		390
DUTY CYCLE		80%
<b>DIMENSIONAL &amp; GENERAL DATA</b>		
PROTECTION LEVEL		IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS (MM)		395 X 316 X 215
MOTOR WEIGHT (KG)		17.3

**COMELIT  
GSM1-K GSM  
INTERCOM  
WITH  
KEYPAD**Turn to page **134****COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:**

	RECEIVER	TRANSMITTER				PHOTOCELLS		LIGHT		
	Built-in*	TO.G0 VA	TO.G0 AK	IRI TX VA	IRI TX AK	PUPILLA	PUPILLA T	PUPILLA B	LAMPLED	LAMP24LED
Code										
<b>BULL1224TURBO</b>	•	•	•	•	•	•	•	•	•	•




ROLLING CENTER  
47 & 47/A2  
GALVANISED STEEL  
MOD 4 GEAR RACK

STEEL MOD 4 GEAR RACK- 1 & 2m lengths

47	Galvanised - 1 meter - mod 4 - gear rack
47/A2	Galvanised - 2 meter - mod 4 - gear rack

SPARES & ACCESSORIES

48	Weld type staves for gear rack
49	Screw type staves for gear rack

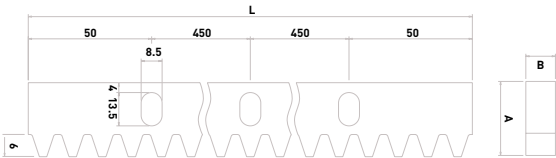


Dimensions in: mm						
47 (1M) & 47/A2 (2M) MOD 4 GEAR RACK						
REFERENCE	FINISH	A	B	L	MOD	WEIGHT
47	GALVANISED	30	12	1005	4	2.4 KG
47/A2	GALVANISED	30	12	2010	4	4.7 KG



ROLLING CENTER  
63/4  
MOD 4 NYLON GEAR RACK  
WITH STEEL CORE

NYLON MOD 4 GEAR RACK WITH STEEL CORE - 1m lengths

63/4	Nylon with steel core - 1 meter - mod 4 - gear rack
------	---

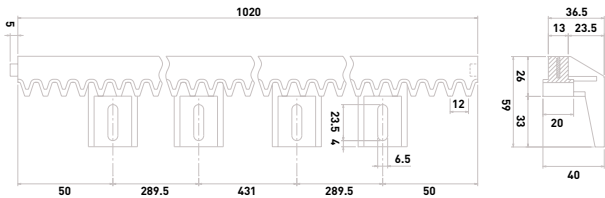

NICE ROBUS KIT 1  
UP TO 600KG  
SLIDING GATE  
AUTOMATION



Turn to page 12



## NICE LFAB4024HS-DKIT

2 x LFAB4024H/S Operator  
2 x LFCBBOX4 Foundation box  
1 x MC824H Control Panel  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
2 x BMA3 Manual release  
1 x OXIBD 4 Channel bi-directional receiver



## NICE LFAB4024HS-SKIT


1 x LFAB4024H/S Operator  
1 x LFCBBOX4 Foundation box  
1 x MC824H Control Panel  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
1 x BMA3 Manual release  
1 x OXIBD 4 Channel bi-directional receiver



### NICE LFABHS KITS - 24v High speed underground gate automation

LFAB4024HS-DKIT	2 leaf - irreversible - magnetic encoder - mechanical limits - 24vdc - gates up to 4m or 400kg
LFAB4024HS-SKIT	1 leaf - irreversible - magnetic encoder - mechanical limits - 24vdc - gates up to 4m or 400kg
<b>SPARES &amp; ACCESSORIES</b>	
LFAB4024HS	Motor - irreversible - magnetic encoder - electromechanical limits - 24vdc - gates up to 4m or 400kg
LFCBBOX4	Foundation box for L-FAB motors
BMA3	Manual release system
MC824H	Control unit and housing for 24v kits
PS324	24vdc battery backup with integrated charger
O-VIEW	Programming & diagnostic unit with BUS T4 connection

### TECHNICAL INFO:

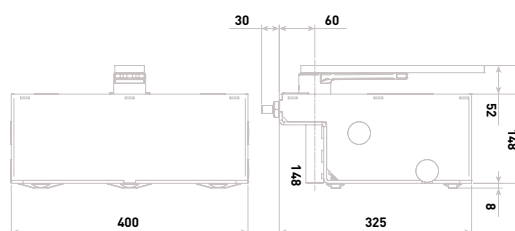

**IDEAL FOR INTENSIVE USE  
& QUICK MANEUVERS**  
90° opening in around 6 seconds.



Dimensions in: mm		LFAB UNDERGROUND MOTOR 400KG UP TO 4M
ELECTRICAL DATA		BM4024H/S
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		7A
PERFORMANCE DATA		
SPEED (RPM)		3
TORQUE (NM)		200
WORK CYCLE (CYCLES PER HOUR)		50**
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP67
WORKING TEMP (°C MIN/MAX)		-20 - +55
DIMENSIONS FOUNDATION BOX (MM)		400 X 325 X 148
MOTOR / FOUNDATION BOX WEIGHT (KG)		14.5 / 16

\*\*The indicated value has to be halved if the opening is up to 180° - by using the BMA1 accessory.

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

		CP / RECEIVER		TRANSMITTERS							PHOTOCELLS										LIGHT				
		MC200 / Built-in*	MC424L / Built-in* / OXI / OXIBD / OXLR	MC824H / OXI / OXIBD / OXLR	MC824HR / OXI / OXIBD / OXLR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EP8B	EPMB	EPLB	EPLOW	F210	F210	F210B	F210B	ELAC	ELDC	WLT
Code																									
RM4024H/S																									





### NICE MFABHS KITS - 24v High speed underground gate automation

MFAB3024HS-DKIT	2 leaf - irreversible - magnetic encoder - with link arm and stop - 24vdc - gates up to 3m or 300kg
MFAB3024HS-SKIT	1 leaf - irreversible - magnetic encoder - with link arm and stop - 24vdc - gates up to 3m or 300kg
<b>SPARES &amp; ACCESSORIES</b>	
MFAB3024HS	Motor - irreversible - magnetic encoder - with link arm and stop - 24vdc - gates up to 3m or 300kg
MFABBOX	Foundation box for M-FAB motors
MEA3	Manual release system
MC824H	Control unit and housing for 24v kits
PS324	24vdc battery backup with integrated charger
O-VIEW	Programming & diagnostic unit with BUS T4 connection



### NICE MFAB3024HS-DKIT

**2 x MFAB3024HS** Operator  
**2 x MFABBOX** Foundation box  
**1 x MC824H** Control Panel  
**2 x ON2E** 2 Channel transmitters  
**1 x Pair of EPMB** Photocells  
**2 x MEA3** Manual release  
**1 x OXIBD** 4 Channel bi-directional receiver



### NICE MFAB3024HS-SKIT


**1 x MFAB3024HS** Operator  
**1 x MFABBOX** Foundation box  
**1 x MC824H** Control Panel  
**2 x ON2E** 2 Channel transmitters  
**1 x Pair of EPMB** Photocells  
**2 x MEA3** Manual release  
**1 x OXIBD** 4 Channel bi-directional receiver

### TECHNICAL INFO:



#### IDEAL FOR INTENSIVE USE & QUICK MANEUVERS

90° opening in around 8 seconds with the MFAB3024HS.

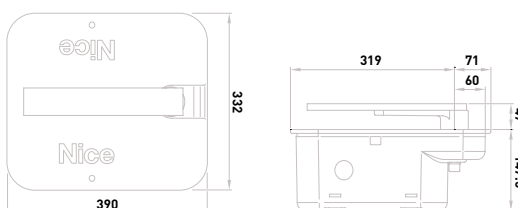

Dimensions in: mm		MFAB UNDERGROUND MOTOR 300KG UP TO 3M
ELECTRICAL DATA		MFAB3024HS
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		6A
PERFORMANCE DATA		
SPEED (RPM)		2.6
TORQUE (NM)		180
WORK CYCLE (CYCLES PER HOUR)		80
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP67
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS FOUNDATION BOX (MM)		390 X 322 X 147.5
MOTOR / FOUNDATION BOX WEIGHT (KG)		11 / 13

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	CP / RECEIVER	TRANSMITTERS									PHOTOCELLS							LIGHT				
		MC200 / Built-in*	MC424L / Built-in* / OXI / OXIBD / OXILR	MC824H / OXI / OXIBD / OXILR	MC824H / OXI / OXIBD / OXILR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPMB	EPL	EPMB	EPLB	EPMBOW	F210	F210B	F210B	ELAC	ELDC
MFAB3024HS																						

### VIDEX 4G GSM INTERCOM WITH KEYPAD



Turn to page 130



## NICE MFAB3100-DKIT

2 x MFAB3100 Operator  
2 x MFABBOX Foundation box  
1 x MC800 Control Panel  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
2 x MEA3 Manual release  
1 x OXIBD 4 Channel bi-directional receiver



## NICE MFAB3100-SKIT


1 x MFAB3100 Operator  
1 x MFABBOX Foundation box  
1 x MC800 Control Panel  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
1 x MEA3 Manual release  
1 x OXIBD 4 Channel bi-directional receiver



### NICE MFAB KITS - 230v underground gate automation

MFAB3100-DKIT	2 leaf - irreversible - magnetic encoder - with link arm and stop - 230v - gates up to 3m or 600kg
MFAB3100-SKIT	1 leaf - irreversible - magnetic encoder - with link arm and stop - 230v - gates up to 3m or 600kg
<b>SPARES &amp; ACCESSORIES</b>	
MFAB3100	Motor - irreversible - magnetic encoder - with link arm and stop - 230v - gates up to 3m or 600kg
MFABBOX	Foundation box for M-FAB motors
MEA3	Manual release system
MC800	Control unit and housing for 230v kits
O-VIEW	Programming & diagnostic unit with BUS T4 connection

### TECHNICAL INFO:

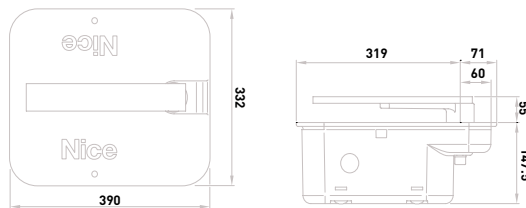

Dimensions in: mm		MFAB UNDERGROUND MOTOR 600KG UP TO 3M
ELECTRICAL DATA		MFAB3100
POWER SUPPLY		230VAC 50* HZ
MOTOR SUPPLY		-
CURRENT		1.2A
PERFORMANCE DATA		
SPEED (RPM)		1.14
TORQUE (NM)		300
WORK CYCLE (CYCLES PER HOUR)**		30
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP67
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS FOUNDATION BOX WEIGHT (MM)		390 X 322 X 147.5
MOTOR / FOUNDATION BOX WEIGHT (KG)		11 / 13

\*60Hz version available on request. \*\*The indicated value has to be halved if the opening is up to 180°.

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code		CP / RECEIVER		TRANSMITTERS								PHOTOCELLS								LIGHT						
		MC200 / Built-in*		MC800 / OX / OXLR	MC824H / OX / OXLR	MC824HR / OX / OXLR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EP80	EPMB	EPLB	EPNOW	F210	F210	F210B	F210B	ELAC	ELDC	WLT
MFAB3100				•			•	•	•	•	•	•	•	•										•		

**WE HAVE A FULL RANGE OF INTERCOMS AVAILABLE AT COMPETITIVE PRICES**

If you don't see what you're looking for call us on 0113 201 6677 or email [Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)





### NICE MFAB KITS - 24v underground gate automation

**MFAB3124-DKIT**

2 leaf - irreversible - magnetic encoder - with link arm and stop - 24vdc - gates up to 3m or 600kg

**MFAB3124-SKIT**

1 leaf - irreversible - magnetic encoder - with link arm and stop - 24vdc - gates up to 3m or 600kg

#### SPARES & ACCESSORIES

**MFAB3124**

Motor - irreversible - magnetic encoder - with link arm and stop - 24vdc - gates up to 3m or 600kg

**MFABBOX4**

Foundation box for M-FAB motors

**MEA3**

Manual release system

**MC824H**

Control unit and housing for 24v kits

**PS324**

24vdc battery backup with integrated charger

**O-VIEW**

Programming & diagnostic unit with BUS T4 connection



### NICE MFAB3124-DKIT


2 x **MFAB3124** Operator  
2 x **MFABBOX** Foundation box  
1 x **MC824H** Control Panel  
2 x **ON2E** 2 Channel transmitters  
2 x **MEA3** Manual release  
1 x Pair of **EPMB** Photocells  
1 x **OXIBD** 4 Channel bi-directional receiver



### NICE MFAB3124-SKIT

1 x **MFAB3124** Operator  
1 x **MFABBOX** Foundation box  
1 x **MC824H** Control Panel  
2 x **ON2E** 2 Channel transmitters  
1 x Pair of **EPMB** Photocells  
1 x **MEA3** Manual release  
1 x **OXIBD** 4 Channel bi-directional receiver

#### TECHNICAL INFO:

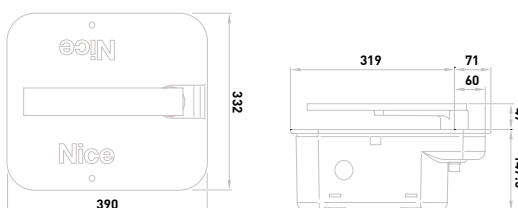

Dimensions in: mm

#### MFAB UNDERGROUND MOTOR 600KG UP TO 3M

ELECTRICAL DATA		MFAB3124
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		5A
PERFORMANCE DATA		
SPEED (RPM)		1.4
TORQUE (NM)		250
WORK CYCLE (CYCLES PER HOUR)**		76
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP67
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS FOUNDATION BOX (MM)		390 X 322 X 147.5
MOTOR / FOUNDATION BOX WEIGHT (KG)		11 / 13

\*\*The indicated value has to be halved if the opening is up to 180°.

#### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	CP / RECEIVER		TRANSMITTERS								PHOTOCELLS								LIGHT					
	MC200 / Built-in*	MC800 / OX1 / OXIBD / OXILR	• MC824H / OX1 / OXIBD / OXILR	MC824HR / OX1 / OXIBD / OXILR	• ERA INTI	• ERA ONE	• ERA ONE BD	• ERA ONE LR	• ERA FLOR	• NICEWAY	EP'S	EPM	EPL	• EP5B	• EPMB	• EPLB	• EPWOW	F210	FT210	F210B	FT210B	ELAC	• EDC	WLT
MFAB3124																								

#### FOR SWING GATE HINGES

See page **180** for details



## NICE LFAB4000-DKIT

2 x **LFAB4000** Operator  
2 x **LFABBOX4** Foundation box  
1 x **MC800** Control Panel  
2 x **ON2E** 2 Channel transmitters  
1 x Pair of **EPMB** Photocells  
2 x **BMA3** Manual release  
1 x **OXIBD** 4 Channel bi-directional receiver



## NICE LFAB4000-SKIT


1 x **LFAB4000** Operator  
1 x **LFABBOX4** Foundation box  
1 x **MC800** Control Panel  
2 x **ON2E** 2 Channel transmitters  
1 x Pair of **EPMB** Photocells  
1 x **BMA3** Manual release  
1 x **OXIBD** 4 Channel bi-directional receiver



### NICE LFAB KITS - 230v Underground gate automation

LFAB4000-DKIT	2 leaf - irreversible - magnetic encoder - mechanical stop on closing - 230v - gates up to 4m or 650kg
LFAB4000-SKIT	1 leaf - irreversible - magnetic encoder - mechanical stop on closing - 230v - gates up to 4m or 650kg
<b>SPARES &amp; ACCESSORIES</b>	
LFAB4000	Motor - irreversible - magnetic encoder - mechanical stop on closing - 230v - gates up to 4m or 650kg
LFABBOX4	Foundation box for L-FAB motors
BMA3	Manual release system
MC800	Control unit and housing for 230v kits
O-VIEW	Programming & diagnostic unit with BUS T4 connection

### TECHNICAL INFO:

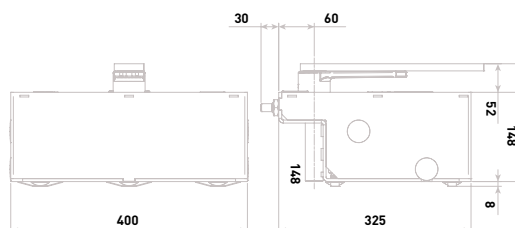

Dimensions in: mm		LFAB UNDERGROUND MOTOR 650KG UP TO 4M
<b>ELECTRICAL DATA</b>		<b>LFAB4000</b>
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		-
CURRENT		1.5A
<b>PERFORMANCE DATA</b>		
SPEED (RPM)		0.8
TORQUE (NM)		500
WORK CYCLE (CYCLES PER HOUR)**		20
<b>DIMENSIONAL &amp; GENERAL DATA</b>		
PROTECTION LEVEL		IP67
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS FOUNDATION BOX (MM)		400 X 325 X 148
MOTOR / FOUNDATION BOX WEIGHT (KG)		14.5 / 16

\*\*The indicated value has to be halved if the opening is up to 180° - by using the BMA1 accessory.

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	CP / RECEIVER	TRANSMITTERS								PHOTOCELLS								LIGHT						
		MC200 / Built-in*	MC800 / OXI / OXIBD / OXILR	MC824H / OXI / OXIBD / OXILR	MC824HS / OXI / OXIBD / OXILR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EPSB	EPMB	EPLB	EPLOW	F210	FT210	F210B	FT210B	ELAC	ELDC
LFAB4000		•				•	•	•	•	•	•	•	•					•	•			•		

### ROLLING CENTER WHATSAPP TECHNICAL?

Scan the QR code for instant help





## NICE LFAB KITS - 24v Underground gate automation

LFAB4024-DKIT	2 leaf - irreversible - magnetic encoder - mechanical stop on closing - 24vdc - gates up to 4m or 650kg
LFAB4024-SKIT	1 leaf - irreversible - magnetic encoder - mechanical stop on closing - 24vdc - gates up to 4m or 650kg

### SPARES & ACCESSORIES

LFAB4024	Motor - irreversible - magnetic encoder - mechanical stop on closing - 24vdc - gates up to 4m or 650kg
LFABBOX4	Foundation box for L-FAB motors
BMA3	Manual release system
MC824H	Control unit and housing for 24v kits
PS324	24vdc battery backup with integrated charger
O-VIEW	Programming & diagnostic unit with BUS T4 connection



## NICE LFAB4024-DKIT


2 x LFAB4024 Operator  
 2 x LFABBOX4 Foundation box  
 1 x MC824H Control Panel  
 2 x ON2E 2 Channel transmitters  
 1 x Pair of EPMB Photocells  
 2 x BMA3 Manual release  
 1 x OXIBD 4 Channel bi-directional receiver



## NICE LFAB4024-SKIT

1 x LFAB4024 Operator  
 1 x LFABBOX4 Foundation box  
 1 x MC824H Control Panel  
 2 x ON2E 2 Channel transmitters  
 1 x Pair of EPMB Photocells  
 1 x BMA3 Manual release  
 1 x OXIBD 4 Channel bi-directional receiver

### TECHNICAL INFO:

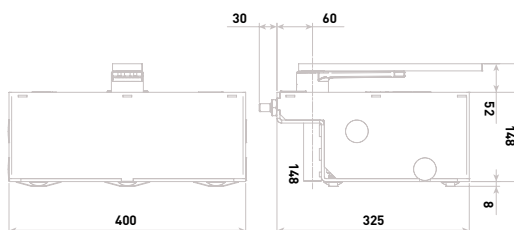

Dimensions in: mm

### LFAB UNDERGROUND MOTOR 650KG UP TO 4M

ELECTRICAL DATA		LFAB4024
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		5A
PERFORMANCE DATA		
SPEED (RPM)		1
TORQUE (NM)		300
WORK CYCLE (CYCLES PER HOUR)**		60
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP67
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS FOUNDATION BOX (MM)		400 X 325 X 148
MOTOR / FOUNDATION BOX WEIGHT (KG)		12.5 / 16

\*\*The indicated value has to be halved if the opening is up to 180° - by using the BMA1 accessory.

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	CP / RECEIVER	TRANSMITTERS	PHOTOCELLS	LIGHT
LFAB4024	MC200 / Built-in* MC800 / OXI / OXIBD / OXILR MC824H / OXI / OXIBD / OXILR MC824HR / OXI / OXIBD / OXILR ERA INTI ERA ONE ERA ONE BD ERA ONE LR ERA FLOR NICEWAY	EPS EPM EPL EPSB EPMB EPLB EPMOW F210 FT210 F210B FT210B ELAC ELDC WLT		


**NEED ASO SAFETY EDGES TO MAKE YOUR GATE COMPLIANT?**

See page 71 for details



## NICE BFAB5024-DKIT

2 x BFAB5024 Operator  
2 x BFABBOX Foundation box  
1 x MC824H Control Panel  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
2 x BMA3 Manual release  
1 x OXIBD 4 Channel bi-directional receiver



## NICE BFAB5024-SKIT


1 x BFAB5024 Operator  
1 x BFABBOX Foundation box  
1 x MC824H Control Panel  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
1 x BMA3 Manual release  
1 x OXIBD 4 Channel bi-directional receiver



### NICE BFAB KITS - 24v Heavy duty underground gate automation

BFAB5024-DKIT	2 leaf - irreversible - magnetic encoder - mechanical stop on closing - 24vdc - gates up to 5m or 900kg
BFAB5024-SKIT	1 leaf - irreversible - magnetic encoder - mechanical stop on closing - 24vdc - gates up to 5m or 900kg
<b>SPARES &amp; ACCESSORIES</b>	
BFAB5024	Motor unit - irreversible - magnetic encoder - electromechanical limits - 24vdc - gates up to 5m or 900kg
BFABBOX	Foundation box for B-FAB motors
BMA3	Manual release system
MC824H	Control unit and housing for 24v kits
PS324	24vdc battery backup with integrated charger
O-VIEW	Programming & diagnostic unit with BUS T4 connection

### TECHNICAL INFO:

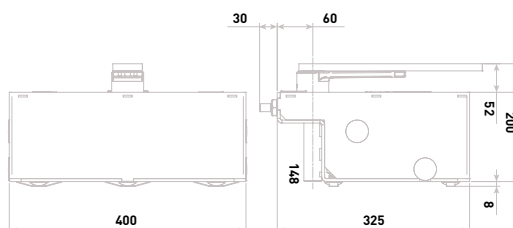

Dimensions in: mm		BFAB UNDERGROUND MOTOR 900KG UP TO 5M
ELECTRICAL DATA		BFAB5024
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		7A
PERFORMANCE DATA		
SPEED (RPM)		0.8
TORQUE (NM)		400
WORK CYCLE (CYCLES PER HOUR)**		45
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP67
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS FOUNDATION BOX (MM)*		400 X 325 X 148
MOTOR / FOUNDATION BOX WEIGHT (KG)		15 / 22

\* With foundation box \*\*The indicated value has to be halved if the opening is up to 180° - by using the BMA1 accessory.

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	CP / RECEIVER	TRANSMITTERS									PHOTOCELLS										LIGHT			
		MC200 / Built-in*	MC800 / OXI / OXIBD / OXILR	MC824H / OXI / OXIBD / OXILR	MC824H / OXI / OXIBD / OXILR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EPFB	EPMB	EPLB	EPLOW	F210	FT210	F210B	FT210B	ELAC	ELDC
BFAB5024																								

**INTERESTED IN AN ALUMINIUM GATE?**  
TAKE A LOOK AT OUR FULL RANGE OF MADE TO MEASURE ALUMINIUM GATES

See page **235** for details



Handwriting practice area consisting of 20 sets of horizontal dashed lines for text entry.



## BENINCA KDU.IT14NVE KIT

2 x **DU.IT14NVE** Operator  
2 x **DU.CZS** Foundation box  
2 x **SB.DUITL** Fixing kit  
2 x **DU.ITST** Mechanical stop  
1 x **BRAINY** Control Panel  
2 x **TO.G02VA** 2 Channel transmitters  
1 x Pair of **PUPILLA** Photocells  
1 x **AWO** Aerial



## BENINCA KSDU.IT14NVE KIT


1 x **DU.IT14NVE** Operator  
1 x **DU.CZS** Foundation box  
1 x **SB.DUITL** Fixing kit  
1 x **DU.ITST** Mechanical stop  
1 x **BRAINY** Control Panel  
2 x **TO.G02VA** 2 Channel transmitters  
1 x Pair of **PUPILLA** Photocells  
1 x **AWO** Aerial



### BENINCA DU.IT14NVE KITS - 230v Underground gate automation

<b>KDU.IT14NVE KIT</b>	2 leaf - irreversible - with encoder - mechanical stop on closing - 230v - gates up to 2.1m or 200kg
<b>KSDU.IT14NVE KIT</b>	1 leaf - irreversible - with encoder - mechanical stop on closing - 230v - gates up to 2.1m or 200kg
<b>SPARES &amp; ACCESSORIES</b>	
<b>DU.IT14NVE</b>	Motor unit - irreversible - with encoder - electromechanical geared - 230v - gates up to 2.1m or 200kg
<b>BRAINY</b>	230v control panel and housing
<b>DU.CZS</b>	Foundation box for DU.IT underground motors
<b>SB.DUITL</b>	Fixing kit inc: manual release, hex key, shoe and mechanical stop
<b>DU.ITST</b>	Adjustable mechanical stop

### TECHNICAL INFO:

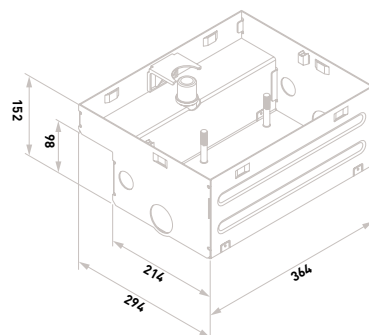

Dimensions in: mm

#### DU.IT14NVE UNDERGROUND MOTOR UP TO 2.1M

ELECTRICAL DATA		DU.IT14NVE
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		-
CURRENT		1.6A
PERFORMANCE DATA		
TORQUE (NM)		220
DUTY CYCLE		40%
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP67
WORKING TEMP (°C MIN/MAX)		-20 - +50
MOTOR / FOUNDATION BOX WEIGHT (KG)		11.2 / 9.6

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

	RECEIVER	TRANSMITTER				PHOTOCELLS			LIGHT		
	Built-in*	TO.G0 VA	TO.G0 AK	IRI TX VA	IRI TX AK	PUPILLA	PUPILLA T	PUPILLA B	LAMPLED	LAMP24LED	IRILAMP
Code											
<b>DU.IT14NVE</b>	•	•	•	•	•	•	•	•	•	•	•



Turn to page **135**



### BENINCA DU.IT24NVE KITS - 24v Underground gate kit

KDU.IT24NVE KIT	2 leaf - irreversible - with encoder - mechanical stop on closing - 24vdc - gates up to 3.5m or 300kg
KSDU.IT24NVE KIT	1 leaf - irreversible - with encoder - mechanical stop on closing - 24vdc - gates up to 3.5m or 300kg
<b>SPARES &amp; ACCESSORIES</b>	
DU.IT24NVE	Motor unit - irreversible - with encoder - electromechanical geared - 24vdc - gates up to 3.5m or 300kg
BRAINY24	24v control panel and housing
DU.CZS	Foundation box for DU.IT underground motors
SB.DU.ITL	Fixing kit inc: manual release, hex key, shoe and mechanical stop
DU.ITST	Adjustable mechanical stop



### BENINCA KDU.IT24NVE KIT


2 x DU.IT24NVE Operator  
 2 x DU.CZS Foundation box  
 2 x SB.DUITL Fixing kit  
 2 x DU.ITST Mechanical stop  
 1 x BRAINY24 Control Panel  
 2 x TO.G02VA 2 Channel transmitters  
 1 x Pair of PUPILLA Photocells  
 1 x AWO Aerial



### BENINCA KSDU.IT24NVE KIT

1 x DU.IT24NVE Operator  
 1 x DU.CZS Foundation box  
 1 x SB.DUITL Fixing kit  
 1 x DU.ITST Mechanical stop  
 1 x BRAINY24 Control Panel  
 2 x TO.G02VA 2 Channel transmitters  
 1 x Pair of PUPILLA Photocells  
 1 x AWO Aerial

### TECHNICAL INFO:

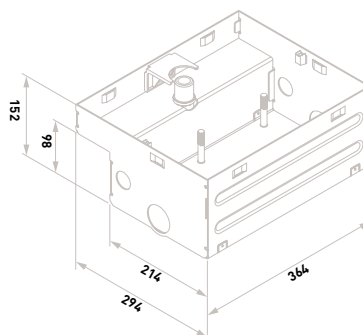

DU.IT24NVE UNDERGROUND MOTOR UP TO 3.5M	
ELECTRICAL DATA	
POWER SUPPLY	230VAC 50/60 HZ
MOTOR SUPPLY	24VDC
CURRENT	11A
PERFORMANCE DATA	
TORQUE (NM)	280
DUTY CYCLE	INTENSIVE USE
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP67
WORKING TEMP (°C MIN/MAX)	-20 - +50
MOTOR / FOUNDATION BOX WEIGHT (KG)	10 / 9.6

\* Available in 115VAC version

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER		TRANSMITTER				PHOTOCELLS			LIGHT	
	Built-in*		TO.G0 VA	TO.G0 AK	IRI TX VA	IRI TX AK	PUPILLA	PUPILLA T	PUPILLA B	LAMP124LED	IRI.LAMP
DU.IT24NVE	•		•	•	•	•	•	•	•	•	•

**LOOKING FOR  
SWING GATE  
HARDWARE  
EQUIPMENT?**

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)  
 or call 0113 201 6677 for  
 more information.



## BENINCA KDU.350NGE KIT

2 x **DU.350NGE** Operator  
2 x **DU.350CF** Foundation box  
2 x **SB.DU350L** Fixing kit  
2 x **DU.350ST** Mechanical stop  
1 x **BRAINY** Control Panel  
2 x **TO.602VA** 2 Channel transmitters  
1 x Pair of **PUPILLA** Photocells  
1 x **AWO** Aerial



## BENINCA KSDU.350NGE KIT


1 x **DU.350NGE** Operator  
1 x **DU.350CF** Foundation box  
1 x **SB.DU350L** Fixing kit  
1 x **DU.350ST** Mechanical stop  
1 x **BRAINY** Control Panel  
2 x **TO.602VA** 2 Channel transmitters  
1 x Pair of **PUPILLA** Photocells  
1 x **AWO** Aerial



### BENINCA DU.350NGE KITS - 230v Underground gate automation

KDU.350NGE KIT	2 leaf - irreversible - with encoder - mechanical stop on closing - 230v - gates up to 4m or 500kg
KSDU.350NGE KIT	1 leaf - irreversible - with encoder - mechanical stop on closing - 230v - gates up to 4m or 500kg
<b>SPARES &amp; ACCESSORIES</b>	
DU.350NGE	Motor unit - irreversible - with encoder - electromechanical geared - 230v - gates up to 4m or 500kg
BRAINY	230v control panel and housing
DU.350CF	Foundation box for DU underground motors
SB.DU350L	Fixing kit inc: manual release, hex key, shoe and mechanical stop
DU.350ST	Adjustable mechanical stop

### TECHNICAL INFO:

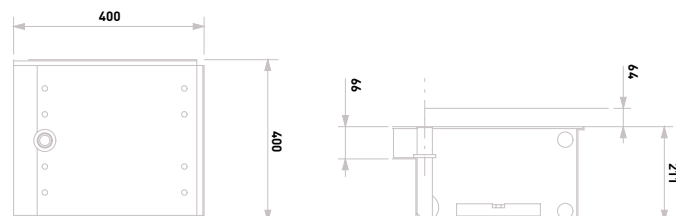

Dimensions in: mm		DU.350NGE UNDERGROUND MOTOR UP TO 4M
ELECTRICAL DATA		DU.350NGE
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		-
CURRENT		1.7A
PERFORMANCE DATA		
TORQUE (NM)		450
DUTY CYCLE		INTENSIVE USE
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP67
WORKING TEMP (°C MIN/MAX)		-20 - +50
MOTOR / FOUNDATION BOX WEIGHT (KG)		20.4 / 14.3

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

	RECEIVER	TRANSMITTER				PHOTOCELLS			LIGHT		
	Built-in*	TO.60 VA	TO.60 AK	IRI TX VA	IRI TX AK	PUPILLA	PUPILLA T	PUPILLA B	LAMPLED	LAMP24LED	IRILAMP
Code											
DU.350NGE	•	•	•	•	•	•	•	•	•	•	•

**CLICK & COLLECT  
START SAVING  
TODAY**

- REGISTER ONLINE  
- PLACE AN ORDER  
- COLLECT

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)





### BENINCA DU.350NVE KITS - 230v Underground gate automation

KDU.350NVE KIT	2 Leaf - irreversible - with encoder - mechanical stop on closing - 230v - gates up to 3m or 500kg
KSDU.350NVE KIT	1 Leaf - irreversible - with encoder - mechanical stop on closing - 230v - gates up to 3m or 500kg
<b>SPARES &amp; ACCESSORIES</b>	
DU.350NVE	Motor unit - irreversible - with encoder - electromechanical geared - 230v - gates up to 3m or 500kg
BRAINY	230v control panel and housing
DU.350CF	Foundation box for DU underground motors
SB.DU350L	Fixing kit inc: manual release, hex key, shoe and mechanical stop
DU.350ST	Adjustable mechanical stop



### BENINCA KDU.350NVE KIT


2 x DU.350NVE Operator  
 2 x DU.350CF Foundation box  
 2 x SB.DU350L Fixing kit  
 2 x DU.350ST Mechanical stop  
 1 x BRAINY Control Panel  
 2 x TO.G02VA 2 Channel transmitters  
 1 x Pair of PUPILLA Photocells  
 1 x AWO Aerial



### BENINCA KSDU.350NVE KIT

1 x DU.350NVE Operator  
 1 x DU.350CF Foundation box  
 1 x SB.DU350L Fixing kit  
 1 x DU.350ST Mechanical stop  
 1 x BRAINY Control Panel  
 2 x TO.G02VA 2 Channel transmitters  
 1 x Pair of PUPILLA Photocells  
 1 x AWO Aerial

### TECHNICAL INFO:

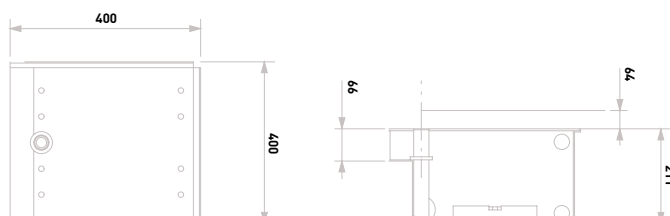

DU.350NVE UNDERGROUND MOTOR UP TO 3M	
ELECTRICAL DATA	
POWER SUPPLY	230VAC 50/60 HZ
MOTOR SUPPLY	-
CURRENT	1.7A
PERFORMANCE DATA	
TORQUE (NM)	370
DUTY CYCLE	INTENSIVE USE
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP67
WORKING TEMP (°C MIN/MAX)	-20 - +50
MOTOR / FOUNDATION BOX WEIGHT (KG)	20.2 / 14.3

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

	RECEIVER	TRANSMITTER	PHOTOCELLS	LIGHT
	Built-in*	TO.G0 VA	PUPILLA	LAMP124LED
		TO.G0 AK	PUPILLA T	LAMP124LED
		IRI TX VA	PUPILLA B	IRI.LAMP
		IRI TX AK		
Code				
DU.350NVE	•	•	•	•





## BENINCA KSB.35AC KIT

2 x SB.35AC Operator  
2 x SB.FB Foundation box  
2 x SB.SL Manual release  
1 x BRAINY Control Panel  
2 x TO.G02VA 2 Channel transmitters  
1 x Pair of PUPILLA Photocells  
1 x 1 x AWO Aerial



## BENINCA KSSB.35AC KIT


1 x SB.35AC Operator  
1 x SB.FB Foundation box  
1 x SB.SL Manual release  
1 x BRAINY Control Panel  
2 x TO.G02VA 2 Channel transmitters  
1 x Pair of PUPILLA Photocells  
1 x 1 x AWO Aerial



### BENINCA SB.35AC KITS - 230v Underground hydraulic gate automation

KSB.35AC KIT	2 leaf - irreversible - lock assist in open & close - 230v - gates up to 3.5m or 800kg
KSSB.35AC KIT	1 leaf - irreversible - lock assist in open & close - 230v - gates up to 3.5m or 800kg
<b>SPARES &amp; ACCESSORIES</b>	
SB.35AC	Motor unit - irreversible - lock assist in open & close - 230v - gates up to 3.5m or 800kg
BRAINY	230v control panel and housing
SB.FB	Foundation box for SB underground motors
SB.SL	Manual release
D.OIL	Bio oil for hydraulic motors

### TECHNICAL INFO:



Dimensions in: mm

#### SB.35AC UNDERGROUND MOTOR UP TO 3.5M

ELECTRICAL DATA		DU.350NVE
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		-
CURRENT		1.1A
PERFORMANCE DATA		
TORQUE (NM)		450
DUTY CYCLE		INTENSIVE USE
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP67
WORKING TEMP (°C MIN/MAX)		-20 - +50
MOTOR / FOUNDATION BOX WEIGHT (KG)		16.5 / 17

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

	RECEIVER	TRANSMITTER				PHOTOCELLS			LIGHT		
	Built-in*	TO.G0 VA	TO.G0 AK	IRI TX VA	IRI TX AK	PUPILLA	PUPILLA T	PUPILLA B	LAMPLED	LAMP24LED	IRILAMP
Code SB.35	•	•	•	•	•	•	•	•	•	•	•

**FOR COMPOSITE  
GATE IN-FILL  
FENCING  
BOARDS**

See page **258** for details



### BENINCA SB.50 KITS - 230v Underground hydraulic gate automation

<b>KSB.50 KIT</b>	2 leaf - irreversible - lock assist in open & close - 230v - gates up to 5m or 500kg
<b>KSSB.50 KIT</b>	1 leaf - irreversible - lock assist in open & close - 230v - gates up to 5m or 500kg
<b>SPARES &amp; ACCESSORIES</b>	
<b>SB.50</b>	Motor unit - irreversible - 230v - gates up to 5m -or 500kg
<b>BRAINY</b>	230v control panel and housing
<b>SB.FB</b>	Foundation box for SB underground motors
<b>SB.SL</b>	Manual release
<b>D.OIL</b>	Bio oil for hydraulic motors



### BENINCA KSB.50 KIT


2 x **SB.50** Operator  
 2 x **SB.FB** Foundation box  
 2 x **SB.SL** Manual release  
 1 x **BRAINY** Control Panel  
 2 x **TO.G02VA** 2 Channel transmitters  
 1 x **Pair of PUPILLA** Photocells  
 1 x 1 x **AWO** Aerial



### BENINCA KSSB.50KIT KIT

1 x **SB.50** Operator  
 1 x **SB.FB** Foundation box  
 1 x **SB.SL** Manual release  
 1 x **BRAINY** Control Panel  
 2 x **TO.G02VA** 2 Channel transmitters  
 1 x **Pair of PUPILLA** Photocells  
 1 x 1 x **AWO** Aerial

### TECHNICAL INFO:



Dimensions in: mm		SB.50 UNDERGROUND MOTOR UP TO 5M
ELECTRICAL DATA		SB.50
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		-
CURRENT		1.1
PERFORMANCE DATA		
TORQUE (NM)		450
DUTY CYCLE		INTENSIVE USE
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP67
WORKING TEMP (°C MIN/MAX)		-20 - +50
MOTOR / FOUNDATION BOX WEIGHT (KG)		16.5 / 17

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

	RECEIVER	TRANSMITTER	PHOTOCELLS	LIGHT
Code	Built-in*	TO.G0 VA	PUPILLA	LAMP24LED
SB.50	•	• TO.G0 AK • IRI TX VA • IRI TX AK	• PUPILLA T • PUPILLA B	• LAMP24LED • IRI LAMP

**LOOKING FOR  
SWING GATE  
HARDWARE  
EQUIPMENT?**

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)  
 or call 0113 201 6677 for  
 more information.



## NICE TITAN3274HS KIT1

2 x TITAN3724 HIGH SPEED Operator  
1 x MC824H Control Panel  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
1 x OXIBD 4 Channel bi-directional receiver



## NICE TITAN3274HS KIT1


1 x TITAN3724 HIGH SPEED Operator  
1 x MC824H Control Panel  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
1 x OXIBD 4 Channel bi-directional receiver



### NICE TITAN3274HS KITS - 24v Above ground gate automation

TITAN3274HS KIT1	2 leaf - Irreversible - magnetic encoder - high speed - gates up to 3.7m or 450kg
TITAN3274HS KIT2	1 leaf - Irreversible - magnetic encoder - high speed - gates up to 3.7m or 450kg
<b>SPARES &amp; ACCESSORIES</b>	
TTN3724HS	Operator - Irreversible - magnetic encoder - high speed - gates up to 3.7m or 450kg
PS324	24vdc battery backup with integrated charger
MC824H	Control unit and housing for 24v kits
O-VIEW	Programming & diagnostic unit with BUS T4 connection

### TECHNICAL INFO:

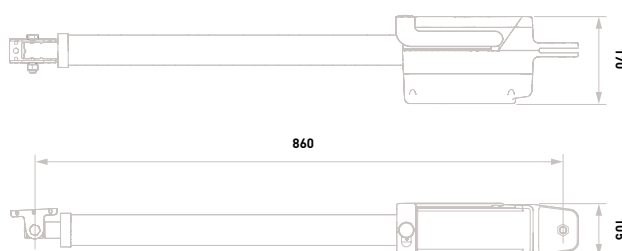

### QUICK MANEUVERS

90° opening in around 12 seconds with the TTN3724HS.



Dimensions in: mm		TITAN ABOVE GROUND OPERATOR 450KG UP TO 3.7M
ELECTRICAL DATA		TTN3724HS
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		6A
PERFORMANCE DATA		
SPEED (M/S)		0.032
FORCE (N)		1900
WORK CYCLE (CYCLES PER HOUR)		CONTINUOUS CYCLE
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP54
WORKING TEMP (°C MIN/MAX)		-20 - +55
DIMENSIONS (MM)		860 X 105 X 170
MOTOR WEIGHT (KG)		8

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	CP / RECEIVER				TRANSMITTERS						PHOTOCELLS								LIGHT				
	MC200 / Built-in*	MC800 / OXI / OXIBD / OXILR	MC824H / OXI / OXIBD / OXILR	MC824HR / OXI / OXIBD / OXILR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EP5B	EPMB	EPLB	EPMDW	F210	FT210	F210B	ELAC	ELDC	WLT
TTN3724HS			•		•	•	•	•	•	•				•	•	•	•					•	•

**WE STOCK THE  
FULL RANGE  
OF GATE  
AUTOMATION**

See page 7 for details



### NICE TITAN3274HS KITS - 24v Above ground gate automation

TITAN6024HS KIT1	2 Leaf - Irreversible - magnetic encoder - high speed - gates up to 6m or 450kg
TITAN6024HS KIT2	1 Leaf - Irreversible - magnetic encoder - high speed - gates up to 6m or 450kg
<b>SPARES &amp; ACCESSORIES</b>	
TTN6024HS	Operator - Irreversible - magnetic encoder - high speed - gates up to 6m or 450kg
PS324	24vdc battery backup with integrated charger
MC824H	Control unit and housing for 24v kits
O-VIEW	Programming & diagnostic unit with BUS T4 connection



### NICE TITAN6024HS KIT 1

2 x TTN6024HS Operator  
1 x MC824H Control Panel  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
1 x OXIBD 4 Channel bi-directional receiver



### NICE TITAN6024HS KIT 2


1 x TTN6024HS Operator  
1 x MC824H Control Panel  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
1 x OXIBD 4 Channel bi-directional receiver

### TECHNICAL INFO:



#### QUICK MANEUVERS

90° opening in around 19 seconds with the TTN6024HS.

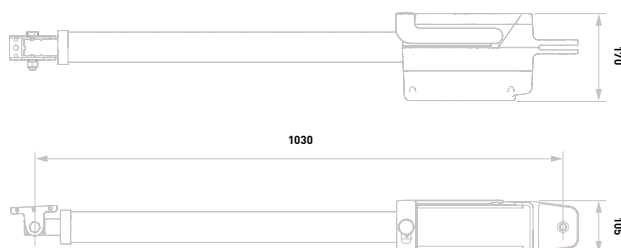

Dimensions in: mm

#### TITAN ABOVE GROUND OPERATOR 450KG UP TO 6M

ELECTRICAL DATA		TTN6024HS
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		7A
PERFORMANCE DATA		
SPEED (M/S)		0.027
FORCE (N)		1900
WORK CYCLE (CYCLES PER HOUR)		CONTINUOUS CYCLE
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP54
WORKING TEMP (°C MIN/MAX)		-20 - +55
DIMENSIONS (MM)		1030 X 105 X 170
MOTOR WEIGHT (KG)		9

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	CP / RECEIVER	TRANSMITTERS									PHOTOCELLS								LIGHT					
		MC200 / Built-in*	MC800 / OXI / OXIBD / OXILR	MC324H / OXI / OXIBD / OXILR	MC324HR / OXI / OXIBD / OXILR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPH	EPL	EPSB	EPMB	EPLB	EPMDW	F210	FT210	F210B	FT210B	ELAC	ELDC
TTN6024HS																								

### ROLLING CENTER WHATSAPP TECHNICAL

Scan the QR code for instant help





## NICE TOONA KIT 1

2 x **T04006** Operator  
1 x **MC800** Control Panel  
2 x **ON2E** 2 Channel transmitters  
1 x Pair of **EPMB** Photocells  
1 x **OXIBD** 4 Channel bi-directional receiver



## NICE TOONA KIT 9

1 x **T04006** Operator  
1 x **MC800** Control Panel  
2 x **ON2E** 2 Channel transmitters  
1 x Pair of **EPMB** Photocells  
1 x **OXIBD** 4 Channel bi-directional receiver



### NICE TOONA KITS - 230v Above ground gate automation up to 3m

TOONA KIT1	2 leaf - Irreversible - increased speed - limit switch on opening & closing - gates up to 3m or 500kg
TOONA KIT9	1 leaf - Irreversible - increased speed - limit switch on opening & closing - gates up to 3m or 500kg
<b>SPARES &amp; ACCESSORIES</b>	
T04006	Operator - Irreversible - increased speed - limit switch on opening & closing - gates up to 3m or 500kg
MC800	Control unit and housing for 230v kits
PLA13	Mechanical travel stops for closing & opening maneuvers
O-VIEW	Programming & diagnostic unit with BUS T4 connection

### TECHNICAL INFO:



Dimensions in: mm		TOONA ABOVE GROUND OPERATOR 500KG UP TO 3M
<b>ELECTRICAL DATA</b>		<b>T04006</b>
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		-
CURRENT		1.5A
<b>PERFORMANCE DATA</b>		
SPEED (M/S)		0.016
FORCE (N)		1800
WORK CYCLE (CYCLES PER HOUR)		58
<b>DIMENSIONAL &amp; GENERAL DATA</b>		
PROTECTION LEVEL		IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS (MM)		820 X 115 X 105
MOTOR WEIGHT (KG)		6

### NICE O-VIEW GATE AUTOMATION PROGRAMMING UNIT



Turn to page **109**

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	CP / RECEIVER	TRANSMITTERS										PHOTOCELLS								LIGHT		
		MC200 / Built-in*	MC300 / OXI / OXIR	MC324H / OXI / OXIR	MC324H / OXI / OXIR	MC324H / OXI / OXIR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPH	EPL	EPMB	EPMB	EPMB	EPMB	ELAC	ELDC	WLT
T04006		•					•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	



### NICE TOONA KITS - 24v Above ground gate automation up to 3m

TOONA KIT3	2 leaf - Irreversible - magnetic encoder - mechanical stop on opening - gates up to 3m or 500kg
TOONA KIT10	1 leaf - Irreversible - magnetic encoder - mechanical stop on opening - gates up to 3m or 500kg
<b>SPARES &amp; ACCESSORIES</b>	
T04024	Operator - Irreversible - magnetic encoder - mechanical stop on opening - gates up to 3m -or 500kg
PS324	24vdc battery backup with integrated charger
MC824H	Control unit and housing for 24v kits
PLA13	Mechanical travel stops for closing & opening maneuvers
O-VIEW	Programming & diagnostic unit with BUS T4 connection



### NICE TOONA KIT 3


- 2 x T04024 Operator
- 1 x MC824H Control Panel
- 2 x ON2E 2 Channel transmitters
- 1 x Pair of EPMB Photocells
- 1 x OXIBD 4 Channel bi-directional receiver



### NICE TOONA KIT 10

- 1 x T04024 Operator
- 1 x MC824H Control Panel
- 2 x ON2E 2 Channel transmitters
- 1 x Pair of EPMB Photocells
- 1 x OXIBD 4 Channel bi-directional receiver

### TECHNICAL INFO:

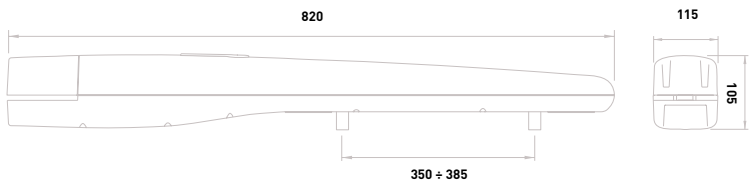

Dimensions in: mm		TOONA ABOVE GROUND OPERATOR 500KG UP TO 3M
<b>ELECTRICAL DATA</b>		<b>T04024</b>
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		5A
<b>PERFORMANCE DATA</b>		
SPEED (M/S)		0.016
FORCE (N)		1800
WORK CYCLE (CYCLES PER HOUR)		95 (OPTIMAL INSTALLATION)
<b>DIMENSIONAL &amp; GENERAL DATA</b>		
PROTECTION LEVEL		IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS (MM)		820 X 115 X 105
MOTOR WEIGHT (KG)		6

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	CP / RECEIVER				TRANSMITTERS						PHOTOCELLS							LIGHT						
	MC200 / Built-in*	MC800 / OX1 / OXBD / OXLR	MC824H / OX1 / OXBD / OXLR	MC824HR / OX1 / OXBD / OXLR	• ERA INTI	• ERA ONE	• ERA ONE BD	• ERA ONE LR	• ERA FLOR	• NICEWAY	EPS	EPM	EPL	• EPSB	• EPMB	• EPLB	• EPMOW	F210	F210	• F210B	F210B	ELAC	• ELDC	• WLT
T04024			•	•	•	•	•	•	•	•				•	•	•	•							

**NEED ACCESS CONTROL SOLUTIONS?**

See page 83 for details



## NICE TOONA KIT 2

2 x **T05016** Operator  
1 x **MC800** Control Panel  
2 x **ON2E** 2 Channel transmitters  
1 x Pair of **EPMB** Photocells  
1 x **OXIBD** 4 Channel bi-directional receiver



## NICE TOONA KIT 6

1 x **T05016** Operator  
1 x **MC800** Control Panel  
2 x **ON2E** 2 Channel transmitters  
1 x Pair of **EPMB** Photocells  
1 x **OXIBD** 4 Channel bi-directional receiver



### NICE TOONA KITS - 230v Above ground gate automation up to 5m

TOONA KIT2	2 leaf - Irreversible - cruising speed - limit switch on opening & closing - gates up to 5m or 500kg
TOONA KIT6	1 leaf - Irreversible - cruising speed - limit switch on opening & closing - gates up to 5m or 500kg
<b>SPARES &amp; ACCESSORIES</b>	
T05016	Operator - Irreversible - cruising speed - limit switch on opening & closing - gates up to 5m or 500kg
MC800	Control unit and housing for 230v kits
PLA13	Mechanical travel stops for closing & opening maneuvers
O-VIEW	Programming & diagnostic unit with BUS T4 connection

### TECHNICAL INFO:



Dimensions in: mm		TOONA ABOVE GROUND OPERATOR 500KG UP TO 5M
ELECTRICAL DATA		T05016
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		-
CURRENT		1.5A
PERFORMANCE DATA		
SPEED (M/S)		0.013
FORCE (N)		1800
WORK CYCLE (CYCLES PER HOUR)		54
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS (MM)		965 X 115 X 105
MOTOR WEIGHT (KG)		7



Turn to page **144**

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	T05016	CP / RECEIVER		TRANSMITTERS					PHOTOCELLS								LIGHT								
		MC200 / Built-in*	MC800 / OXI / OXIBD / OXILR	MC24H / OXI / OXIBD / OXILR	MC24HR / OXI / OXIBD / OXILR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EP5B	EPMB	EPLB	EPN0W	F210	FT210	F210B	FT210B	ELAC	ELDC	WLT
			•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•





### NICE TOONA KITS - 24v Above ground gate automation up to 5m

TOONA KIT4	2 leaf - Irreversible - magnetic encoder - mechanical stop on opening- gates up to 5m or 500kg
TOONA KIT7	1 leaf - Irreversible - magnetic encoder - mechanical stop on opening- gates up to 5m or 500kg
<b>SPARES &amp; ACCESSORIES</b>	
T05024	Operator - Irreversible - magnetic encoder - mechanical stop on opening - gates up to 5m or 500kg
PS324	24vdc battery backup with integrated charger
MC824H	Control unit and housing for 24v kits
PLA13	Mechanical travel stops for closing & opening maneuvers
O-VIEW	Programming & diagnostic unit with BUS T4 connection



### NICE TOONA KIT 4


- 2 x T05024 Operator
- 1 x MC824H Control Panel
- 2 x ON2E 2 Channel transmitters
- 1 x Pair of EPMB Photocells
- 1 x OXIBD 4 Channel bi-directional receiver



### NICE TOONA KIT 7

- 1 x T05024 Operator
- 1 x MC824H Control Panel
- 2 x ON2E 2 Channel transmitters
- 1 x Pair of EPMB Photocells
- 1 x OXIBD 4 Channel bi-directional receiver

### TECHNICAL INFO:

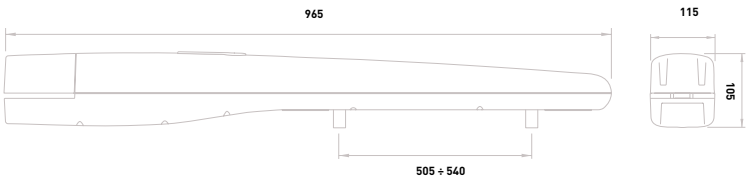

Dimensions in: mm		TOONA ABOVE GROUND OPERATOR 500KG UP TO 5M
ELECTRICAL DATA		T05024
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		5A
PERFORMANCE DATA		
SPEED (M/S)		0.016
FORCE (N)		1800
WORK CYCLE (CYCLES PER HOUR)		95 (OPTIMAL INSTALLATION)
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS (MM)		965 X 115 X 105
MOTOR WEIGHT (KG)		7

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	CP / RECEIVER		TRANSMITTERS								PHOTOCELLS								LIGHT					
	MC200 / Built-in*	MC800 / OXI / OXIBD / OXILR	• MC824H / OXI / OXIBD / OXILR	MC824HR / OXI / OXIBD / OXILR	• ERA INTI	• ERA ONE	• ERA ONE BD	• ERA ONE LR	• ERA FLOR	• NICEWAY	EPS	EPM	EPL	• EPSB	• EPMB	• EPLB	• EPMOW	F210	FT210	• F210B	FT210B	ELAC	• ELDC	• WLT
T05024																								

**LOOKING FOR SWING GATE HARDWARE EQUIPMENT?**

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)  
 or call 0113 201 6677 for more information.



## NICE TOONA KIT 5

2 x T07024 Operator  
1 x MC824H Control Panel  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
1 x OXIBD 4 Channel bi-directional receiver



## NICE TOONA KIT 8


1 x T07024 Operator  
1 x MC824H Control Panel  
2 x ON2E 2 Channel transmitters  
1 x Pair of EPMB Photocells  
1 x OXIBD 4 Channel bi-directional receiver



### NICE TOONA KITS - 24v Above ground gate automation up to 7m

TOONA KIT5	2 leaf - Irreversible - magnetic encoder - mechanical stop on O/C - gates up to 7m or 1700kg
TOONA KIT8	1 leaf - Irreversible - magnetic encoder - mechanical stop on O/C - gates up to 7m or 1700kg
<b>SPARES &amp; ACCESSORIES</b>	
T07024	Operator - Irreversible - magnetic encoder - mechanical stop on O/C - gates up to 7m or 1700kg
PS324	24vdc battery backup with integrated charger
MC824H	Control unit and housing for 24v kits
PLA13	Mechanical travel stops for closing & opening maneuvers
O-VIEW	Programming & diagnostic unit with BUS T4 connection

### TECHNICAL INFO:

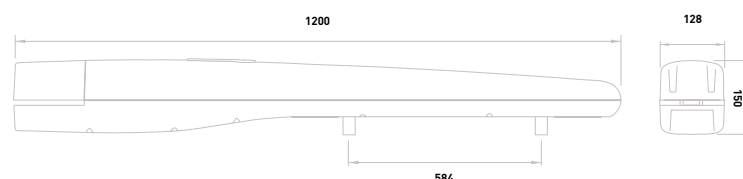

Dimensions in: mm		TOONA ABOVE GROUND OPERATOR 1700KG UP TO 7M
<b>ELECTRICAL DATA</b>		<b>T07024</b>
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		5A
<b>PERFORMANCE DATA</b>		
SPEED (M/S)		0.013
FORCE (N)		2700
WORK CYCLE (CYCLES PER HOUR)		41
<b>DIMENSIONAL &amp; GENERAL DATA</b>		
PROTECTION LEVEL		IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS (MM)		1200 X 128 X 150
MOTOR WEIGHT (KG)		15

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	T07024	CP / RECEIVER		TRANSMITTERS						PHOTOCELLS								LIGHT						
		MC200 / Built-in*	MC424L / Built-in* / OX1 / OXBD / OXLR	• MC324H / OX1 / OXBD / OXLR	• MC324HR / OX1 / OXBD / OXLR	• ERA INTI	• ERA ONE	• ERA ONE BD	• ERA ONE LR	• ERA FLOR	• NICEWAY	EPS	EPM	EPL	• EPSB	• EPMB	• EPLB	• EPMOW	F210	FT210	• F210B	FT210B	ELAC	• ELOC
				•																				



Turn to page 69



Handwriting practice area consisting of 20 sets of horizontal dashed lines for text entry.



## BENINCA KBOB30ME KIT

2 x **BOB.30ME** Operator  
1 x **BRAINY** Control Panel  
2 x **TO.G02VA** 2 Channel transmitters  
1 x Pair of **PUPILLA** Photocells  
1 x **AWO** Aerial



## BENINCA KSB0B30ME KIT


1 x **BOB.30ME** Operator  
1 x **BRAINY** Control Panel  
2 x **TO.G02VA** 2 Channel transmitters  
1 x Pair of **PUPILLA** Photocells  
1 x **AWO** Aerial



### BENINCA BOB KITS - 230v Above ground gate automation up to 3m

KBOB30ME KIT	2 leaf - Irreversible - encoder - built-in stop gates up to 3m or 400kg
KSB0B30ME KIT	1 leaf - Irreversible - encoder - built-in stop gates up to 3m or 400kg
<b>SPARES &amp; ACCESSORIES</b>	
BOB30ME	Operator - Irreversible - encoder - built-in stop - gates up to 3m or 400kg
BRAINY	230v control panel and housing

### TECHNICAL INFO:

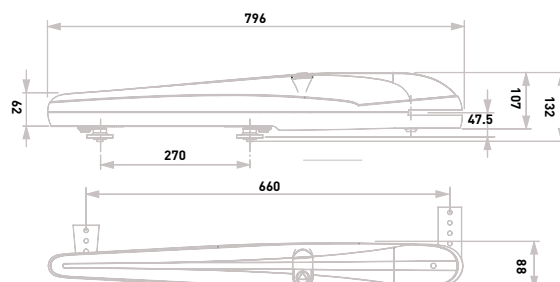

Dimensions in: mm		BOB30ME ABOVE GROUND MOTOR UP TO 3M
ELECTRICAL DATA		BOB30ME
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		-
CURRENT		1.8A
PERFORMANCE DATA		
FORCE (NM)		2300
DUTY CYCLE		30%
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50
MOTOR WEIGHT (KG)		8.5

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

	RECEIVER	TRANSMITTER				PHOTOCELLS			LIGHT		
	Built-in*		TO.G0 VA	TO.G0 AK	IRI TX VA	IRI TX AK	PUPILLA	PUPILLA T	PUPILLA B	LAMP LED	IRI LAMP
Code											
BOB50ME	•		•	•	•	•	•	•	•	•	•

### ROLLING CENTER WHATSAPP TECHNICAL

Scan the QR code for instant help





### BENINCA BOB KITS - 24v Above ground gate automation up to 3m

KB0B3024E KIT	2 leaf - Irreversible - encoder - force detection - gates up to 3m or 400kg
KSB0B3024E KIT	1 leaf - Irreversible - encoder - force detection - gates up to 3m or 400kg
<b>SPARES &amp; ACCESSORIES</b>	
BOB3024E	Operator - Irreversible - encoder - force detection - gates up to 3m or 400kg
BRAINY24	24v control panel and housing
BRAINY24.CB-SW	24v battery back up accessory 1.2ah batteries and support bracket
BRAINY24.CB	24v battery back up accessory with CBY.24V battery charger 1.2ah batteries and support bracket



### BENINCA KBOB3024E KIT


2 x BOB.3024E Operator  
1 x BRAINY24 Control Panel  
2 x TO.G02VA 2 Channel transmitters  
1 x Pair of PUPILLA Photocells  
1 x AWO Aerial



### BENINCA KSB0B3024E KIT

1 x BOB.3024E Operator  
1 x BRAINY Control Panel  
2 x TO.G02VA 2 Channel transmitters  
1 x Pair of PUPILLA Photocells  
1 x AWO Aerial

### TECHNICAL INFO:

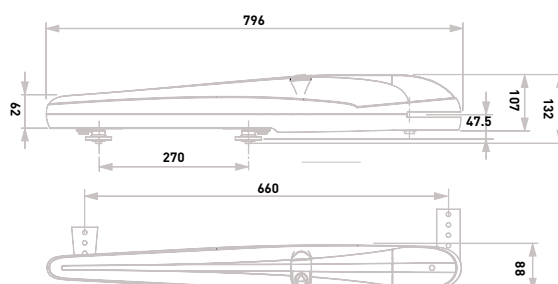

Dimensions in: mm

#### BOB3024E ABOVE GROUND MOTOR UP TO 3M

ELECTRICAL DATA		BOB3024E
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		5.5A
PERFORMANCE DATA		
FORCE (NM)		1800
DUTY CYCLE		INTENSIVE USE
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50
MOTOR WEIGHT (KG)		8

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER		TRANSMITTER		PHOTOCELLS			LIGHT	
	Built-in*		TO.G0 VA	TO.G0 AK	IRI TX VA	IRI TX AK	PUPILLA	PUPILLA T	PUPILLA B
BOB3024E	•		•	•	•	•	•	•	•
								LAMP124LED	IRILLAMP

### ENC ABS ENCLOSURES



Turn to page **107**



## BENINCA KBOB50ME KIT

2 x **BOB.50ME** Operator  
1 x **BRAINY** Control Panel  
2 x **TO.602VA** 2 Channel transmitters  
1 x Pair of **PUPILLA** Photocells  
1 x **AWO** Aerial



## BENINCA KSBOB50ME KIT

1 x **BOB.50ME** Operator  
1 x **BRAINY** Control Panel  
2 x **TO.602VA** 2 Channel transmitters  
1 x Pair of **PUPILLA** Photocells  
1 x **AWO** Aerial


BOB30ME



### BENINCA BOB KITS - 230v Above ground gate automation up to 5m

KBOB50ME KIT	2 leaf - Irreversible - encoder - built-in stop - gates up to 5m or 600kg
KSBOB50ME KIT	1 leaf - Irreversible - encoder - built-in stop - gates up to 5m or 600kg
<b>SPARES &amp; ACCESSORIES</b>	
BOB50ME	Operator - Irreversible - encoder - built-in stop - gates up to 5m or 600kg
BRAINY	230v control panel and housing

### TECHNICAL INFO:

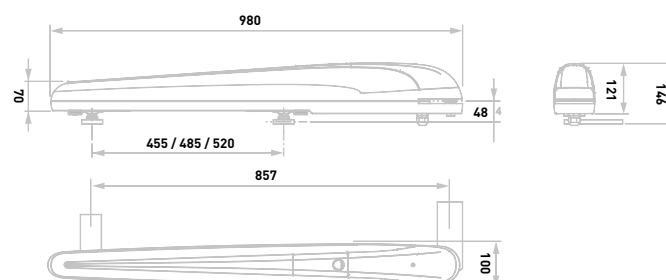

Dimensions in: mm		BOB50ME ABOVE GROUND MOTOR UP TO 5M
ELECTRICAL DATA		BOB50ME
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		-
CURRENT		1.4A
PERFORMANCE DATA		
FORCE (NM)		3500
DUTY CYCLE		30%
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50
WEIGHT (KG)		11.6

**CAN'T SEE WHAT  
YOU'RE LOOKING  
FOR?**

Our friendly team are  
here to help.  
Call us on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

	RECEIVER	TRANSMITTER				PHOTOCELLS			LIGHT		
	Built-in*	TO.60 VA	TO.60 AK	IRI TX VA	IRI TX AK	PUPILLA	PUPILLA T	PUPILLA B	LAMPLED	LAMP24LED	IRILAMP
Code											
BOB50ME	•	•	•	•	•	•	•	•	•	•	•



### BENINCA BOB KITS - 24v Above ground gate automation up to 5m

KB0B5024E KIT	2 leaf - Irreversible - encoder - force detection - gates up to 5m or 500kg
KSB0B5024E KIT	1 leaf - Irreversible - encoder - force detection - gates up to 5m or 500kg
<b>SPARES &amp; ACCESSORIES</b>	
BOB5024E	Operator - Irreversible - encoder - force detection - gates up to 5m or 500kg
BRAINY24	24v control panel and housing
BRAINY24.CB-SW	24v battery back up accessory 1.2ah batteries and support bracket
BRAINY24.CB	24v battery back up accessory with CBY.24V battery charger 1.2ah batteries and support bracket



### BENINCA KBOB5024E KIT


2 x BOB.5024E Operator  
 1 x BRAINY24 Control Panel  
 2 x TO.G02VA 2 Channel transmitters  
 1 x Pair of PUPILLA Photocells  
 1 x AWO Aerial



### BENINCA KSB0B5024E KIT

1 x BOB.5024E Operator  
 1 x BRAINY Control Panel  
 2 x TO.G02VA 2 Channel transmitters  
 1 x Pair of PUPILLA Photocells  
 1 x AWO Aerial

### TECHNICAL INFO:

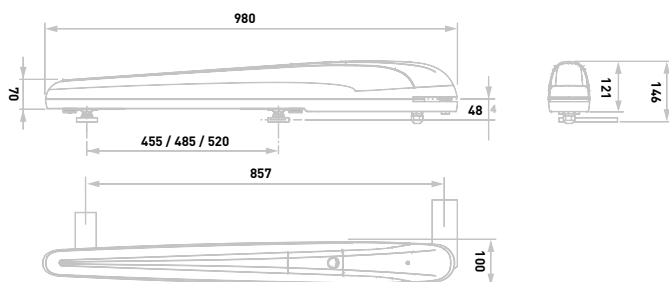

Dimensions in: mm		BOB5024E ABOVE GROUND MOTOR UP TO 5M
ELECTRICAL DATA		BOB5024E
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		24VDC
CURRENT		6.7A
PERFORMANCE DATA		
FORCE (NM)		2200
DUTY CYCLE		INTENSIVE USE
DIMENSIONAL & GENERAL DATA		
PRETECTION LEVEL		IP44
WORKING TEMP (°C MIN/MAX)		-20 - +50
MOTOR WEIGHT (KG)		11.6

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER		TRANSMITTER				PHOTOCELLS			LIGHT	
	Built-in*		TO.G0 VA	TO.G0 AK	IRI TX VA	IRI TX AK	PUPILLA	PUPILLA T	PUPILLA B	LAMPILED	IRILLAMP
BOB5024E	•		•	•	•	•	•	•	•	•	•

### FOR SWING GATE HINGES

See page 180 for details



## BENINCA KHD35 KIT

2 x **HD.35** Hydraulic operator  
1 x **BRAINY** Control Panel  
2 x **TO.602VA** 2 Channel transmitters  
1 x Pair of **PUPILLA** Photocells  
1 x 1 x **AWO** Aerial



## BENINCA KSHD35 KIT


1 x **HD.35** Hydraulic operator  
1 x **BRAINY** Control Panel  
2 x **TO.602VA** 2 Channel transmitters  
1 x Pair of **PUPILLA** Photocells  
1 x 1 x **AWO** Aerial



### BENINCA HD KITS - 230v Above ground hydraulic gate automation up to 3.5m

KHD35 KIT	2 leaf - reversible - encoder - gates up to 3.5m or 500kg
KSHD35 KIT	1 leaf - reversible - encoder - gates up to 3.5m or 500kg
<b>SPARES &amp; ACCESSORIES</b>	
HD.35	Operator - reversible - encoder - gates up to 3.5m or 500kg
BRAINY	230v control panel and housing
D.OIL	Bio oil for hydraulic motors

### TECHNICAL INFO:

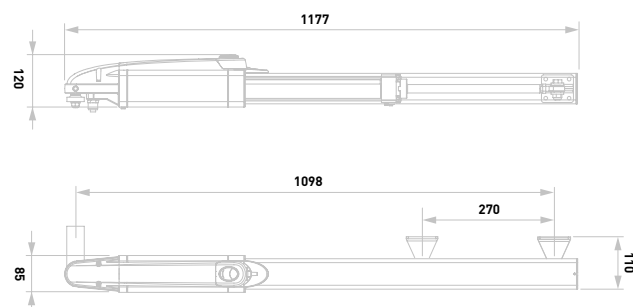

Dimensions in: mm		HD.35 ABOVE GROUND MOTOR UP TO 3.5M
ELECTRICAL DATA		HD.35
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		-
CURRENT		1.1A
PERFORMANCE DATA		
FORCE (NM)		5000
DUTY CYCLE		INTENSIVE USE
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP55
WORKING TEMP (°C MIN/MAX)		-20 - +50
MOTOR WEIGHT (KG)		14

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER			TRANSMITTER				PHOTOCELLS			LIGHT		
	Built-in*			TO GO VA	TO GO AK	IRI TX VA	IRI TX AK	PUPILLA	PUPILLA T	PUPILLA B	LAMPLED	LAMP24LED	IRILAMP
HD35	•			•	•	•	•	•	•	•	•	•	•

### BENINCA 24V HYDRAULIC KITS ALSO AVAILABLE

Speak with our sales team  
for more information on  
0113 201 6677 or email  
Info@rollingcenter.co.uk

### INTERESTED IN AN ALUMINIUM GATE? TAKE A LOOK AT OUR FULL RANGE OF MADE TO MEASURE ALUMINIUM GATES

See page **235** for details





### BENINCA HD KITS - 230v Above ground hydraulic gate automation up to 3.5m

<b>KHD35AC KIT</b>	2 Leaf - Irreversible - encoder - mechanical limits on open and close - gates up to 3.5m or 500kg
<b>KSHD35AC KIT</b>	1 Leaf - Irreversible - encoder - mechanical limits on open and close - gates up to 3.5m or 500kg
<b>SPARES &amp; ACCESSORIES</b>	
<b>HD.35AC</b>	Operator - Irreversible - encoder - mechanical limits on open and close - gates up to 3.5m or 500kg
<b>BRAINY</b>	230v control panel and housing
<b>D.OIL</b>	Bio oil for hydraulic motors



### BENINCA KHD35AC KIT


2 x **HD.35AC** Hydraulic operator  
 1 x **BRAINY** Control Panel  
 2 x **TO.G02VA** 2 Channel transmitters  
 1 x Pair of **PUPILLA** Photocells  
 1 x **AWO** Aerial



### BENINCA KSHD35AC KIT

1 x **HD.35AC** Hydraulic operator  
 1 x **BRAINY** Control Panel  
 2 x **TO.G02VA** 2 Channel transmitters  
 1 x Pair of **PUPILLA** Photocells  
 1 x **AWO** Aerial

### TECHNICAL INFO:

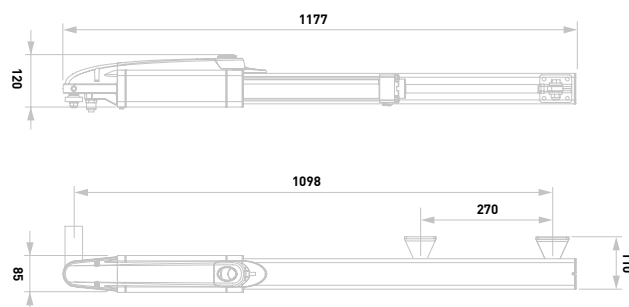

Dimensions in: mm		HD.35AC ABOVE GROUND MOTOR UP TO 3.5M
ELECTRICAL DATA		HD.35AC
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		-
CURRENT		1.1A
PERFORMANCE DATA		
FORCE (NM)		5000
DUTY CYCLE		INTENSIVE USE
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP55
WORKING TEMP (°C MIN/MAX)		-20 - +50
MOTOR WEIGHT (KG)		13

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER		TRANSMITTER				PHOTOCELLS			LIGHT		
	Built-in*		TO.G0 VA	TO.G0 AK	IRI TX VA	IRI TX AK	PUPILLA	PUPILLA T	PUPILLA B	LAMPLED	LAMP24LED	IRILAMP
<b>HD35AC</b>	•		•	•	•	•	•	•	•	•	•	•

### BENINCA 24V HYDRAULIC KITS ALSO AVAILABLE

Speak with our sales team  
 for more information on  
 0113 201 6677 or email  
[Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)

### ROLLING CENTER QUICK FOLDING



Turn to page **190**



## BENINCA KHD50 KIT

2 x **HD.50** Hydraulic operator  
1 x **BRAINY** Control Panel  
2 x **TO.G02VA** 2 Channel transmitters  
1 x Pair of **PUPILLA** Photocells  
1 x **AWO** Aerial



## BENINCA KSHD50 KIT


1 x **HD.50** Hydraulic operator  
1 x **BRAINY** Control Panel  
2 x **TO.G02VA** 2 Channel transmitters  
1 x Pair of **PUPILLA** Photocells  
1 x **AWO** Aerial



### BENINCA HD KITS - 230v Above ground hydraulic gate automation up to 5m

KHD50 KIT	2 leaf - reversible - encoder - gates up to 5m or 500kg
KSHD50 KIT	1 leaf - reversible - encoder - gates up to 5m or 500kg
<b>SPARES &amp; ACCESSORIES</b>	
HD.50	Operator - reversible - encoder - gates up to 5m or 500kg
BRAINY	230v control panel and housing
D.OIL	Bio oil for hydraulic motors

### TECHNICAL INFO:

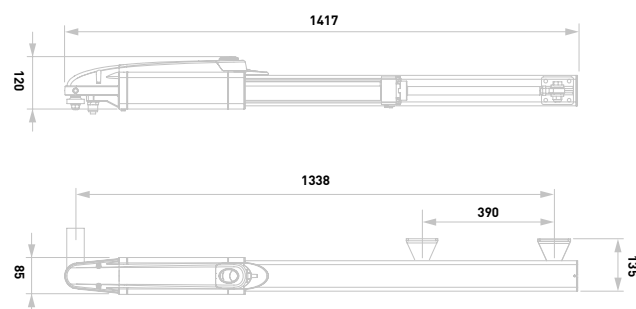

Dimensions in: mm		HD.50 ABOVE GROUND MOTOR UP TO 5M
ELECTRICAL DATA		HD.50
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		-
CURRENT		1.1A
PERFORMANCE DATA		
FORCE (NM)		5000
DUTY CYCLE		INTENSIVE USE
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP55
WORKING TEMP (°C MIN/MAX)		-20 - +50
MOTOR WEIGHT (KG)		14.5

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

	RECEIVER	TRANSMITTER				PHOTOCELLS			LIGHT		
	Built-in*	TO.G0 VA	TO.G0 AK	IRI TX VA	IRI TX AK	PUPILLA	PUPILLA T	PUPILLA B	LAMPLED	LAMP24LED	IRILAMP
Code	•	•	•	•	•	•	•	•	•	•	•
HD50	•	•	•	•	•	•	•	•	•	•	•

### BENINCA 24V HYDRAULIC KITS ALSO AVAILABLE

Speak with our sales team  
for more information on  
**0113 201 6677** or email  
[Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)

### REGISTER FOR A TRADE ACCOUNT TODAY TO RECEIVE TRADE DISCOUNTS

Call us on  
**0113 201 6677** our friendly  
team are here to help.



### BENINCA HD KITS - 230v Above ground hydraulic gate automation up to 5m

KHD50AC KIT	2 leaf - Irreversible - encoder - mechanical limits on open and close - gates up to 5m or 500kg
KSHD50AC KIT	1 leaf - Irreversible - encoder - mechanical limits on open and close - gates up to 5m or 500kg
<b>SPARES &amp; ACCESSORIES</b>	
HD.50AC	Operator - Irreversible - encoder - mechanical limits on open and close - gates up to 5m or 500kg
BRAINY	230v control panel and housing
D.OIL	Bio oil for hydraulic motors



### BENINCA KHD50AC KIT


2 x HD.50AC Hydraulic operator  
1 x BRAINY Control Panel  
2 x TO.G02VA 2 Channel transmitters  
1 x Pair of PUPILLA Photocells  
1 x AWO Aerial



### BENINCA KSHD50AC KIT

1 x HD.50AC Hydraulic operator  
1 x BRAINY Control Panel  
2 x TO.G02VA 2 Channel transmitters  
1 x Pair of PUPILLA Photocells  
1 x AWO Aerial

### TECHNICAL INFO:

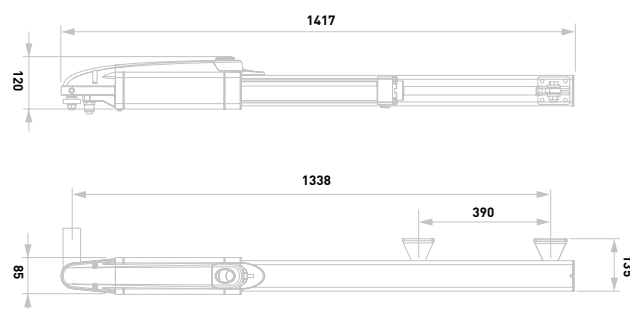

Dimensions in: mm		HD.50AC ABOVE GROUND MOTOR UP TO 5M
ELECTRICAL DATA		HD.50AC
POWER SUPPLY		230VAC 50/60 HZ
MOTOR SUPPLY		-
CURRENT		1.1A
PERFORMANCE DATA		
FORCE (NM)		5000
DUTY CYCLE		INTENSIVE USE
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP55
WORKING TEMP (°C MIN/MAX)		-20 - +50
MOTOR WEIGHT (KG)		14.5

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER		TRANSMITTER				PHOTOCELLS			LIGHT		
	Built-in*		TO.G0 VA	TO.G0 AK	IRI TX VA	IRI TX AK	PUPILLA	PUPILLA T	PUPILLA B	LAMPLED	LAMP24LED	IRILLAMP
HD50AC	•		•	•	•	•	•	•	•	•	•	•

### BENINCA 24V HYDRAULIC KITS ALSO AVAILABLE

Speak with our sales team for more information on 0113 201 6677 or email [Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)

### NEED MAGNETIC LOCKS?

See page 158 for details



## NICE HOPP KIT 1

**1 x H07124** Master operator  
**1 x H07224** Slave operator  
**1 x MC824H** Control Panel  
**2 x ON2E** 2 Channel transmitters  
**1 x Pair of EPMB** Photocells  
**1 x ELDC** Flashing light  
**1 x OXIBD** 4 Channel bi-directional receiver



## NICE HOPP KIT 1


**1 x H07124** Master operator  
**1 x MC824H** Control Panel  
**2 x ON2E** 2 Channel transmitters  
**1 x Pair of EPMB** Photocells  
**1 x ELDC** Flashing light  
**1 x OXIBD** 4 Channel bi-directional receiver



### HOPP KITS - 24v Above ground articulated gate automation up to 2.4m

HOPPKIT1	2 leaf - irreversible - with articulated arm - gates up to 2.4m or 250kg
HOPPKIT2	1 leaf - irreversible - with articulated arm - gates up to 2.4m or 250kg
<b>SPARES &amp; ACCESSORIES</b>	
H07124	Operator - master - irreversible - with articulated arm - gates up to 2.4m or 250kg
HK7224	Operator - slave - irreversible - with articulated arm - gates up to 2.4m or 250kg
POA3	Spare control unit for H07124 control panel
OVIEW	Programming & diagnostic unit with BUS T4 connection

### TECHNICAL INFO:

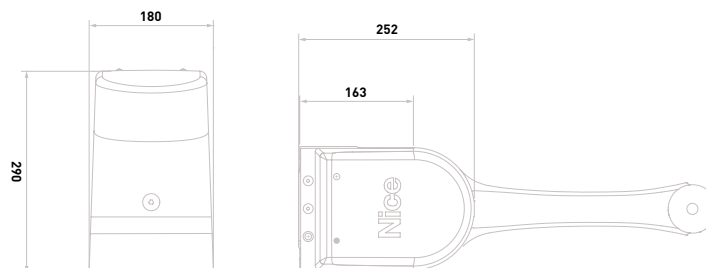

HOPP ARTICULATED GATE OPERATOR UP TO 2.4M		
	H07124	H07224
<b>ELECTRICAL DATA</b>		
MOTOR SUPPLY	230VAC 50/60 HZ	
POWER SUPPLY	24VDC	24VDC
CURRENT	1.3A	4A
<b>PERFORMANCE DATA</b>		
SPEED (RPM)		1.68
TORQUE (NM)		250
WORK CYCLE (CYCLES PER HOUR)		35
<b>DIMENSIONAL &amp; GENERAL DATA</b>		
PROTECTION LEVEL		IP54
WORKING TEMP (°C MIN/MAX)		-20 - +50
DIMENSIONS (MM)		252 X 180 X 290
MOTOR WEIGHT (KG)	9	6.5

### COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER			TRANSMITTER							PHOTOCELLS								LIGHT				
	Built-in*	OXIBD	OXILR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EPSB	EPMB	EPLB	EPIMOW	F210	F210	F210B	F210B	ELAC	ELDC	WLT
H07124		•	•	•	•	•	•	•	•				•	•	•	•			•			•	•

**WE HAVE A FULL RANGE OF ACCESS CONTROL SOLUTIONS AVAILABLE AT COMPETITIVE PRICES**

If you don't see what you're looking for call us on **0113 201 6677** or email **Info@rollingcenter.co.uk**



## HYKE KITS - 24v Above ground articulated gate automation up to 3.5m

HYKEKIT1	2 leaf - irreversible - magnetic encoder - with articulated arm - gates up to 3.5m or 330kg
HYKEKIT2	1 leaf - irreversible - magnetic encoder - with articulated arm - gates up to 3.5m or 330kg
<b>SPARES &amp; ACCESSORIES</b>	
HK7024	Operator - master - irreversible - magnetic encoder - with articulated arm - gates up to 3.5m or 330kg
HK7224	Operator - slave - irreversible - magnetic encoder - with articulated arm - gates up to 3.5m or 330kg
HKA2	Spare control unit for HK7024 control panel
OVIEW	Programming & diagnostic unit with BUS T4 connection



## NICE HYKE KIT 1


- 1 x HK7024 Master operator
- 1 x HK7224 Slave operator
- 1 x MC824H Control Panel
- 2 x ON2E 2 Channel transmitters
- 1 x Pair of EPMB Photocells
- 1 x ELDC Flashing light
- 1 x OXIBD 4 Channel bi-directional receiver



## NICE HYKE KIT 2

- 1 x HK7024 Master operator
- 1 x MC824H Control Panel
- 2 x ON2E 2 Channel transmitters
- 1 x Pair of EPMB Photocells
- 1 x ELDC Flashing light
- 1 x OXIBD 4 Channel bi-directional receiver

## TECHNICAL INFO:

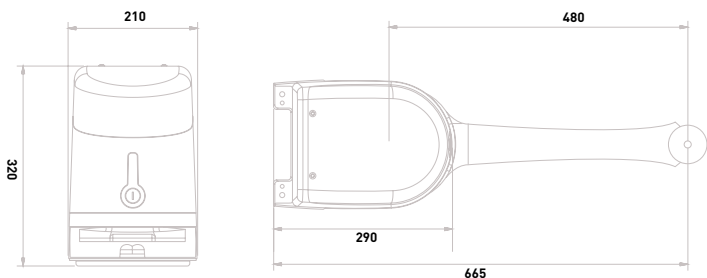

HYKE ARTICULATED GATE OPERATOR UP TO 3.5M		
ELECTRICAL DATA	HK7024	HK7224
MOTOR SUPPLY	230VAC 50/60 HZ	
POWER SUPPLY	24VDC	24VDC
CURRENT	1.5A	6A
PERFORMANCE DATA		
SPEED (RPM)	1.5	
TORQUE (NM)	500	
WORK CYCLE (CYCLES PER HOUR)	40	
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL	IP54	
WORKING TEMP (°C MIN/MAX)	-20 - +50	
DIMENSIONS (MM)	290 X 210 X 320	
MOTOR WEIGHT (KG)	10.5	9.5

## COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES:

Code	RECEIVER		TRANSMITTER							PHOTOCELLS										LIGHT					
	Built-in*		OXBD	OXLR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EPSB	EPMB	EPLB	EPMDW	EPMDR	F210	F210B	F210B	F210B	ELAC	ELDC	WLT
HK7024			•														•								

**SRS DC90SS  
STANDALONE  
KEYPAD WITH  
PROXIMITY  
READER**



Turn to page 87



## NICE M3BAR-KIT

- 1 x M3BAR Barrier unit
- 1 x WA11 Adjustable stand
- 1 x WA10 24 Reflective strips
- 1 x XBA15 Barrier boom arm 3130mm



## NICE M5BAR-KIT

- 1 x M5BAR Barrier unit
- 1 x WA11 Adjustable stand
- 1 x WA10 24 Red reflective strips
- 1 x XBA14 Barrier boom arm 4150mm



## NICE M7BAR-KIT

- 1 x M7BAR Barrier unit
- 1 x WA11 Adjustable stand
- 1 x WA10 24 Red reflective strips
- 2 x XBA14 Barrier boom arm 3150mm
- 1 x XBA9 Boom connector

**NICE L-BAR KIT  
ALSO AVAILABLE  
UP TO 9M BOOM**

Speak with our sales team  
for more information on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**




## M-BAR KITS - 24v barrier automation from 4-6m openings

M3BAR-KIT	Barrier kit - irreversible - with built-in control unit - openings up to 4m (1x 3150mm boom)
M5BAR-KIT	Barrier kit - irreversible - with built-in control unit - bar connector - openings up to 6m (1x 4150mm boom)
M7BAR-KIT	Barrier kit - irreversible - with built-in control unit - bar connector - openings up to 6m (2x 3150mm boom)

### SPARES & ACCESSORIES

BCU1	Spare control unit for M5BAR units control panel
XBA5	White paint finished aluminium boom 69 x 92 x 5150
XBA14	White paint finished aluminium boom 69 x 92 x 4150
XBA15	White paint finished aluminium boom 69 x 92 x 3150
XBA9	Boom connector
XBA6	Indicator lights - click fixing - 6m length
XBA4	Indicator lights - click fixing - 4m length
XBA13	Rubber impact protection strips - 1m length
WA10	Red reflective strips
WA11	Adjustable stand for M5BAR kits
WA13	Aluminium skirt rack - 2m length

### TECHNICAL INFO:

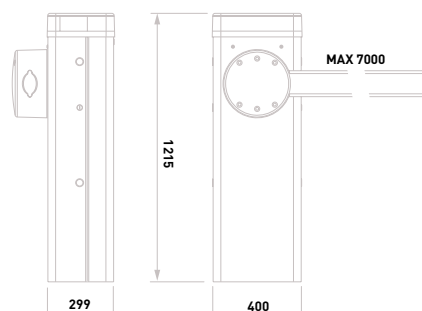

Dimensions in: mm		MBAR BARRIERS 4 & 6M		
ELECTRICAL DATA		M3BAR	M5BAR	M7BAR
MOTOR SUPPLY		230VAC 50/60 HZ		
POWER SUPPLY		24VDC		
CURRENT		1.3A	1.1A	1.1A
PERFORMANCE DATA				
SPEED MIN. ÷ MAX. (S)		1.5 - 4	3 - 6	6 - 10
TORQUE (NM)		100	200	300
WORK CYCLE (CYCLES PER HOUR)		600	350	200
DIMENSIONAL & GENERAL DATA				
PROTECTION LEVEL		IP54		
WORKING TEMP (°C MIN/MAX)		-20 - +55		
DIMENSIONS (MM)		400 X 299 X 1215		
WEIGHT (KG)		80		85



NEW



### GT BARRIER KITS - 24v barrier automation from 4-6m openings

GT8-4M	Automatic barrier kit - irreversible gear motor with encoder - 4340mm boom - up to 4m opening
GT8-6M	Automatic barrier kit - irreversible gear motor with encoder - 6350mm boom - up to 6m opening
<b>SPARES &amp; ACCESSORIES</b>	
803BB-0180	GT80AGS - Automatic barrier unit - irreversible gear motor with encoder - balance springs included
803XA-0400	4340mm aluminium boom
803XA-0410	6350mm aluminium boom
803XA-0430	Luminous red/green LED crown
G02807	Boom support post
803XA-0020	LED Strip For 4m Boom
803XA-0190	LED connector
G02809	Pack of 20 red, reflective, adhesive strips
DIR10	Pair of safety photocells
RGSM001S	GSM Gateway module with built in radio, to be used with CAME CONNECT
1NCE	RGSM cloud connectivity kit

### CAME GT8-4M BARRIER KIT


1 x GGT80AGS Barrier unit  
 1 x 803XA-0400 4.34m aluminium boom  
 1 x G02807 Fixed rest  
 1 x 803XA-0020 LED strip  
 1 x 803XA-0190 LED connector  
 1 x G02809 Reflective strips  
 1 x DIR10 Pair of photocells  
 1 x RGSM001S GSM module  
 1 x 1NCE 500mb sim card



### CAME GT8-6M BARRIER KIT

1 x GGT80AGS Barrier unit  
 1 x 803XA-0410 6.35m aluminium boom  
 1 x G02807 Fixed rest  
 1 x 803XA-0020 LED strip  
 1 x 803XA-0190 LED connector  
 1 x G02809 Reflective strips  
 1 x DIR10 Pair of photocells  
 1 x RGSM001S GSM module  
 1 x 1NCE 500mb sim card

### TECHNICAL INFO:

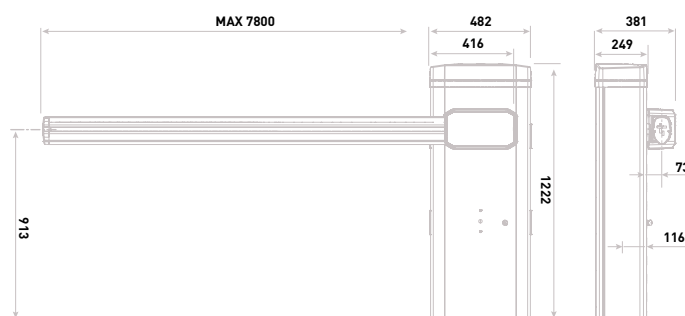

Dimensions in: mm	GT8 BARRIER UNIT
<b>ELECTRICAL DATA</b>	<b>GT8</b>
MOTOR SUPPLY	230VAC 50/60 HZ
POWER SUPPLY	24VDC
CURRENT	1.1mA
<b>PERFORMANCE DATA</b>	
OPENING TIME @ 90° (S)	4 - 8
TORQUE (NM)	300
WORK CYCLE (CYCLES PER HOUR)	200
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
PROTECTION LEVEL	IP54
WORKING TEMP (°C MIN/MAX)	-20 - +70 (-40 WITH ITEM 001PSRT01)
DIMENSIONS (MM)	482 X 1222 X 249
WEIGHT (KG)	90

**NEED LOOP  
DETECTORS OR  
TIMERS FOR YOUR  
BARRIER  
INSTALLATIONS?**

See page 98 for details



## BFT DAMPY B MANUAL GAS BOLLARDS

These gas-spring rising bollards are designed to offer road access control with an extremely quick and simple operation.

The bollards are operated using special keys, lowered by pushing down and automatically locked into place at the bottom. They can be used in mixed installations to cover wide passages managed by both fixed, electric and gas operated bollards.


NEW



### DAMPY B MANUAL GAS BOLLARDS

DAMPY B 115-500	Gas spring rising bollard - 115mm diameter - 500mm height
DAMPY B 219-500	Gas spring rising bollard - 219mm diameter - 500mm height
DAMPY B 219-700	Gas spring rising bollard - 219mm diameter - 700mm height

### TECHNICAL INFO:

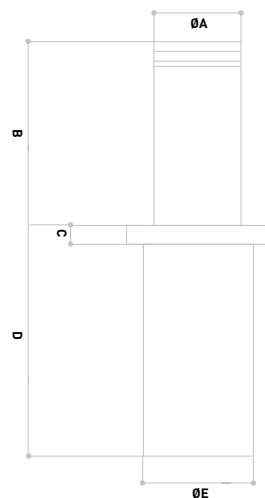

Dimensions in: mm

## DAMPY B MANUAL GAS BOLLARD

REFERENCE	A Ø	B	C	D	E Ø
DAMPY B 115-500	115	500	25	593	168
DAMPY B 210-500	210	500	45	756	273
DAMPY B 210-700	210	700	45	1016	273

## DAMPY B MANUAL GAS BOLLARD

SPECIFICATION	DAMPY B 115-500	DAMPY B 219-500	DAMPY B 219-700
SHAFT SIZE	Ø115MM - H: 500	Ø220MM - H: 500	Ø220MM - H: 700
SHAFT THICKNESS	4	6	6
IMPACT RESISTANCE (JOULE)	5,000	10,000	10,000
BREAKING RESISTANCE (JOULE)	30,000	60,000	60,000
SHAFT MOVEMENT	INTERNAL GAS SPRING	INTERNAL GAS SPRING	INTERNAL GAS SPRING
SURFACE FINISH (WITH REAR REFLECTING FILM)	RAL 7016	RAL 7016	RAL 7016
SHAFT LOCKING	TRIANGLE KEY	TRIANGLE KEY	TRIANGLE KEY

**NEED PRE OR POST  
SALES TECHNICAL  
SUPPORT?  
OUR FRIENDLY  
TEAM ARE HERE TO  
HELP**

Call us on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**





NEW

## BFT STOPPY B AUTOMATIC ELECTROMECHANICAL GAS BOLLARDS

These electromechanical bollards are designed to match customer needs for quality at highly competitive prices.


**Stoppy B** comes in two models: Stoppy B Ø115-500 which has a Ø115 mm, 500 mm high rod and is fitted with a rear-reflecting strip.

The **Stoppy B** Ø200-700, which has a Ø200 mm, 700mm high rod, a light crown and a rear-reflecting strip.

### STOPPY B AUTOMATIC ELECTROMECHANICAL BOLLARDS FOR SEMI-INTENSIVE USE

STOPPY B 500 KIT	Automatic rising bollard - 115mm diameter - 500mm height - with Perseo control unit
STOPPY B 700 KIT	Automatic rising bollard - 220mm diameter - 700mm height - with Perseo control unit
<b>SPARES &amp; ACCESSORIES</b>	
STOPPY B 115-500	Automatic rising bollard - 115mm diameter - 500mm height
STOPPY B 220-700	Automatic rising bollard - 220mm diameter - 700mm height
PERSEO	230v control unit for STOPPY bollards - supports up to 4 bollards
ALLU	Power supply for STOPPY light crown
MITTO	2 button transmitters

### TECHNICAL INFO:

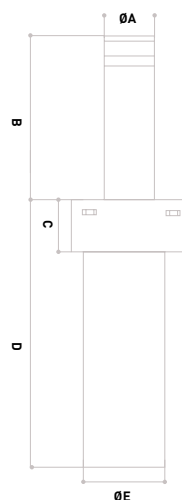

Dimensions in: mm

#### STOPPY B AUTOMATIC ELECTROMECHANICAL BOLLARD

REFERENCE	A Ø	B	C	D	E Ø
STOPPY B 115-500	115	490	115	965	190
STOPPY B 200-700	200	700	115	1180	273

SPECIFICATION	STOPPY B AUTOMATIC ELECTROMECHANICAL BOLLARD	
	STOPPY B 115-500	STOPPY B 220-700
SHAFT SIZE	Ø115MM - H: 500	Ø200MM - H: 700
RIISING TIME (SEC)	7	9
CONTROL UNIT	PERSEO 230VAC 12A MAX	PERSEO 230VAC 12A MAX
LIMIT SWITCH	REED MAGNETIC SENSOR	REED MAGNETIC SENSOR
BREAKING RESISTANCE (JOULE)	6,000	6,000
LOCK	ELECTRIC BRAKE	ELECTRIC BRAKE
DUTY CYCLE	500 PER DAY	500 PER DAY
OPERATING TEMP (°C MIN/MAX)	-20 - +60	-20 - +60

**COMELIT  
GSM1-K GSM  
INTERCOM  
WITH  
KEYPAD**



Turn to page **134**



## BFT STOPPY MBB AUTOMATIC ELECTROMECHANICAL GAS BOLLARDS

These electromechanical bollards have an internal oil-bath gear motor which gives them a higher usage capability.

**Stoppy-MBB** is designed to work in the most extreme conditions, thanks to the metal parts being cataphoresis treated, and the new EPDM seal integrated in the flange.

The LED light cap fits perfectly into the floor flange with the shaft lowered, drastically reducing the ingress of debris into the casing.

NEW



### STOPPY MBB AUTOMATIC ELECTROMECHANICAL BOLLARDS FOR INTENSIVE USE

**STOPPY MBB 500 KIT** Automatic rising bollard - 219mm diameter - 500mm height - with Perseo control unit

**STOPPY MBB 700 KIT** Automatic rising bollard - 219mm diameter - 700mm height - with Perseo control unit

#### SPARES & ACCESSORIES

**STOPPY MBB 219-500** Automatic rising bollard - 219mm diameter - 500mm height


**STOPPY MBB 219-700** Automatic rising bollard - 219mm diameter - 700mm height

**PERSEO** 230v control unit for STOPPY bollards - supports up to 4 bollards

**ALLU** Power supply for STOPPY light crown

**MITTO** 2 button transmitters

#### TECHNICAL INFO:

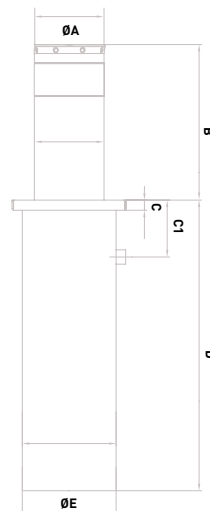

Dimensions in: mm

#### STOPPY MBB AUTOMATIC ELECTROMECHANICAL BOLLARD

REFERENCE	A Ø	B	C	C1	D	E Ø
STOPPY MBB 219-500	219	490	32	180	915	295
STOPPY MBB 219-700	219	700	32	180	1165	295

**CAN'T SEE WHAT  
YOU'RE LOOKING  
FOR?**

Our friendly team are here to help.  
Call us on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**

SPECIFICATION	STOPPY MBB AUTOMATIC ELECTROMECHANICAL BOLLARD	
	STOPPY MBB 219-500	STOPPY MBB 219-700
SHAFT SIZE	Ø219MM - H: 500	Ø219MM - H: 700
RISE TIME (SEC)	6	9
CONTROL UNIT	PERSEO 230VAC 12A MAX	PERSEO 230VAC 12A MAX
IMPACT RESISTANCE (JOULE)	10,500	10,500
BREAKING RESISTANCE (JOULE)	150,000	150,000
SLOWDOWN	YES	YES
LOCK	ELECTRIC BRAKE	ELECTRIC BRAKE
DUTY CYCLE	INTENSIVE 1500 MANOEUVERS/DAY	INTENSIVE 1500 MANOEUVERS/DAY



**NICE  
ERA ON1 / 2 / 4**  
433MHZ ROLLING  
CODE TRANSMITTER

### ROLLING CODE TRANSMITTERS

ON1E	1 button 433.92 MHz rolling code - transmitter
ON2E	2 button 433.92 MHz rolling code - transmitter
ON4E	4 button 433.92 MHz rolling code - transmitter

#### SPARES & ACCESSORIES

OXIBD	4 channel plug-in 433.92mhz receiver
OX2	2 channel standalone 433.92mhz standalone receiver



**NICE  
ERA ON3**  
433.92MHZ BI-DIRECTIONAL  
ROLLING CODE TRANSMITTER

### BI-DIRECTIONAL ROLLING CODE TRANSMITTERS

ON3EBD	3 button 433.92 MHz rolling code - bi-directional transmitter
--------	---

#### SPARES & ACCESSORIES

OXIBD	4 channel plug-in 433.92mhz receiver
OX2	2 channel standalone 433.92mhz standalone receiver



**NICE  
INTI**  
433.92MHZ ROLLING  
CODE TRANSMITTER

### ROLLING CODE TRANSMITTERS

INTI1	1 button 433.92 MHz rolling code - transmitter
INTI2	2 button 433.92 MHz rolling code - transmitter
INTIKIT	3x 1 button 433.92 MHz rolling code transmitters - OX2 universal standalone receiver

#### SPARES & ACCESSORIES

OX2	2 channel standalone 433.92mhz standalone receiver
OXIBD	4 channel plug-in 433.92mhz receiver

**INTI  
TRANSMITTERS  
AVAILABLE IN  
DIFFERENT  
COLOURS.**

Please get in touch with your requirements.



**NICE  
FLO**  
433.92MHZ FIXED CODE  
TRANSMITTER



#### DIP SWITCH TRANSMITTERS

FL01	1 button 433.92 MHz dip-switch / fixed code transmitter
FL02	2 button 433.92 MHz dip-switch / fixed code transmitter

#### SPARES & ACCESSORIES

OXIBD	4 channel plug-in 433.92mhz receiver
OX2	2 channel standalone 433.92mhz standalone receiver

**BENINCA  
TO.GO VA**  
433.92MHZ ADVANCED  
ROLLING CODE  
TRANSMITTER



#### ADVANCED ROLLING CODE TRANSMITTERS

TO.G02VA	2 button 433.92 MHz advanced rolling code transmitter
TO.G04VA	4 button 433.92 MHz advanced rolling code transmitter

#### SPARES & ACCESSORIES

ONE.2WB	2 Channel 433.92 MHz universal receiver
---------	---

**BENINCA  
TO.GO AK**  
433.92MHZ ADVANCE  
ROLLING CODE & FIXED CODE  
TRANSMITTER



#### ADVANCED ROLLING CODE & FIXED CODE TRANSMITTERS

TO.G02AK	2 button 433.92 MHz advanced rolling code & fixed code transmitter
TO.G04AK	4 button 433.92 MHz advanced rolling code & fixed code transmitter

#### SPARES & ACCESSORIES

ONE.2WB	2 Channel 433.92 MHz Universal receiver
---------	---



**NICE  
OXIBD**  
433.92MHZ BI-DIRECTIONAL  
PLUG-IN RECEIVER

### BI-DIRECTIONAL PLUG-IN RECEIVER

OXIBD

4 channel plug-in 433.92mhz receiver



**NICE  
OX2**  
433.92MHZ UNIVERSAL  
STANDALONE RECEIVER

### UNIVERSAL STANDALONE RECEIVER

OX2

2 channel standalone 433.92mhz standalone receiver



**BENINCA  
ONE.2WB**  
433.92MHZ  
UNIVERSAL RECEIVER

### UNIVERSAL RECEIVER

ONE.2WB

2 Channel 433.92 MHz universal receiver

**NEED ACCESS  
CONTROL  
SOLUTIONS?**

See page **83** for details

# '22

2022 TRADE CATALOGUE

GATE HARDWARE  
GATE AUTOMATION  
ACCESS CONTROL  
GATE SAFETY  
ALUMINIUM GATES

**TEL.** 0113 201 6677

# SECTION B

# SAFETY PRODUCTS

SAFETY PHOTOCELLS	60
PHOTOCCELL POSTS	65
LASER CURTAINS	66
FLASHING LIGHTS	67
FORCE TESTERS	69
SAFETY SIGNS & FALL PROTECTION CABLES	70
SAFETY EDGES & COMPONENTS	71
SAFETY EDGE ACCESSORIES	77
FINGER KEEPERS	77
SAFETY EDGE TRANSMITTERS	78
SAFETY EDGE RECEIVERS	78
SAFETY EDGES CONTROL INTERFACE RELAYS	80



## NICE EPM SYNCHRONISED RELAY TYPE SAFETY PHOTOCELLS



### ERA PHOTOCELLS RELAY TYPE

EPM	Relay type photocell - pair for outdoors
EPMO	Relay type photocell - pair for outdoors - 30° adjustable

#### SPARES & ACCESSORIES

P0	Photocell mounting bracket
----	----------------------------

RELAY TYPE PHOTOCELLS		
ELECTRICAL DATA	EPM	EPMO
POWER SUPPLY	WITHOUT JUMPER 24V AC/DC WITH JUMPER 12V AC/DC	
CURRENT	RX 25MA - TX 30MA	
PERFORMANCE DATA		
ESTIMATED RANGE (M)	15 (30 WITH JUMPER + "10" CUT)	
ADJUSTABILITY	NONE	30° ON ALL AXES
RELAY RANGE	MAX 500MA AND 48V	
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL	IP44	
OPERATING TEMP (°C MIN/MAX)	-20 - +50	
DIMENSIONS (MM)	50 X 29 X 80	50 X 38 X 80
WEIGHT (G)	140	160



## NICE EPM SYNCHRONISED BLUEBUS TYPE SAFETY PHOTOCELLS



### ERA PHOTOCELLS BLUEBUS TYPE

EPMB	BlueBUS type photocell - pair for outdoors
EPMOB	BlueBUS type photocell - pair for outdoors - 30° adjustable

#### SPARES & ACCESSORIES

P0	Photocell mounting bracket
----	----------------------------

BLUEBUS TYPE PHOTOCELLS		
ELECTRICAL DATA	EPMB	EPMOB
POWER SUPPLY	POWERED VIA BLUEBUS	
PERFORMANCE DATA		
ESTIMATED RANGE (M)	UP TO 15 FOR OFFSET MAX TX-RX ±5	
ADJUSTABILITY	NONE	30° ON ALL AXES
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL	IP44	
OPERATING TEMP (°C MIN/MAX)	-20 ÷ +55	
DIMENSIONS (MM)	50 X 29 X 80	50 X 38 X 80
WEIGHT (G)	140	160

**CLICK & COLLECT  
START SAVING  
TODAY**

- REGISTER ONLINE  
- PLACE AN ORDER  
- COLLECT

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)





### WIRED ADJUSTABLE PHOTOCELLS

F210	Relay type photocell - pair for outdoors - horizontal 210° - vertical 30° adjustable
F210B	BlueBUS type photocell - pair for outdoors - horizontal 210° - vertical 30° adjustable

#### SPARES & ACCESSORIES

FA1	Vandal resistant cover for F210 wireless photocells
FTA1	7ah - 3.6v battery for F210 wireless photocells

ADJUSTABLE PHOTOCELLS		
ELECTRICAL DATA	F210	F210B
POWER SUPPLY	WITHOUT JUMPER 24V AC/DC WITH JUMPER 12V AC/DC LIMITS	RX CAN BE CONNECTED TO BLUEBUS NETWORKS
CURRENT	RX 25MA - TX 30MA	1 BLUEBUS UNIT
RELAY RANGE / ESTIMATED RANGE (M)	MAX 500MA AND 48V (F210) / 10 (30 WITH REMOVED JUMPER)	
PERFORMANCE, DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL	IP44	
OPERATING TEMP (°C MIN/MAX)	-20 - +55	
DIMENSIONS (MM)	46 X 45 X 128	
WEIGHT (G)	230	



### WIRELESS ADJUSTABLE PHOTOCELLS

FT210	Relay type - wireless photocell - pair for outdoors - horizontal 210° - vertical 30° adjustable
FT210B	BlueBUS type - wireless photocell - pair for outdoors - horizontal 210° - vertical 30° adjustable

#### SPARES & ACCESSORIES

FA1	Vandal resistant cover for F210 wireless photocells
FTA1	7ah - 3.6v battery for F210 wireless photocells

ADJUSTABLE WIRELESS PHOTOCELLS		
ELECTRICAL DATA	FT210	FT210B
POWER SUPPLY	RX 12/24V AC/DC TX 3.6V LITHIUM BATTERY	RX CAN BE CONNECTED TO BLUEBUS NETWORKS
CURRENT	RX 120MA 12V - TX 70MA 24V / TX 20UA STATIC - 450UA MAX	1 BLUEBUS UNIT - TX 20UA STATIC - 450UA MAX
RELAY RANGE / ESTIMATED RANGE (M)	MAX 500MA AND 48V (FT210) 10 RESIDENTIAL / 15 INDUSTRIAL	
PERFORMANCE, DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL	IP44	
OPERATING TEMP (°C MIN/MAX)	-20 ÷ +55	
DIMENSIONS (MM)	46 X 45 X 128	
WEIGHT (G)	300	280



**NICE  
FT210**  
WIRELESS ADJUSTABLE  
SYNCHRONISED BLUEBUS  
TYPE SAFETY PHOTOCELLS

**WE STOCK A WIDE  
RANGE OF AUDIO,  
VIDEO, GSM &  
WIRELESS  
INTERCOMS**

See page **111** for details



## NICE EPS SLIM SYNCHRONISED RELAY TYPE SAFETY PHOTOCELLS



### ERA SLIM PHOTOCELLS RELAY TYPE

EPS	Relay type photocell - pair for outdoors
EPSA	Relay type photocell - pair for outdoors - vandal resistant metal body

RELAY TYPE PHOTOCELLS		
ELECTRICAL DATA	EPS	EPSA
POWER SUPPLY	24V AC/DC	
CURRENT	RX 25MA - TX 30MA	
PERFORMANCE DATA		
ESTIMATED RANGE (M)	15	
RELAY RANGE	MAX 500MA AND 48V	
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL	IP44	
OPERATING TEMP (°C MIN/MAX)	-20 - +50	
DIMENSIONS (MM)	30 X 27 X 106	31 X 28 X 108
WEIGHT (G)	120	440



## NICE EPS SLIM SYNCHRONISED RELAY TYPE SAFETY PHOTOCELLS



### ERA SLIM PHOTOCELLS BLUEBUS TYPE

EPSB	BlueBUS type photocell - pair for outdoors
EPSAB	BlueBUS type photocell - pair for outdoors - vandal resistant metal body

BLUEBUS TYPE PHOTOCELLS		
ELECTRICAL DATA	EPSB	EPSAB
POWER SUPPLY	POWERED VIA BLUEBUS	
PERFORMANCE DATA		
ESTIMATED RANGE (M)	UP TO 15 FOR OFFSET MAX TX-RX	
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL	IP44	
OPERATING TEMP (°C MIN/MAX)	-20 - +50	
DIMENSIONS (MM)	30 X 27 X 106	31 X 28 X 108
WEIGHT (G)	120	440

**WE STOCK A VAST  
RANGE OF GATE  
ROLLERS, GEAR  
RACK AND MANY  
OTHER GATE  
HARDWARE  
PRODUCTS**

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)  
or call 0113 201 6677  
for more information.



**NICE  
EPMOR**  
REFLECTIVE RELAY TYPE  
SAFETY PHOTOCELLS

**ERA REFLECTIVE PHOTOCELLS RELAY TYPE**

**EPMOR**

Relay type photocell - reflective - pair for outdoors - horizontal 210° - vertical 30° adjustable

REFLECTIVE TYPE PHOTOCELLS	
ELECTRICAL DATA	
POWER SUPPLY	12/24V AC/DC
CURRENT	50MA
PERFORMANCE DATA	
ESTIMATED RANGE (M)	8 (MAXIMUM RANGE IN OPTIMAL CONDITIONS 15)
ADJUSTABILITY	APPROX 10° ON ALL AXES
RELAY RANGE	MAX 500MA AND 48V
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP44
OPERATING TEMP (°C MIN/MAX)	-20 - +50
DIMENSIONS (MM)	50 X 40 X 105
WEIGHT (G)	160



**BENINCA  
PUPILLA**  
SYNCHRONISED RELAY TYPE  
SAFETY PHOTOCELLS

**PHOTOCELLS RELAY TYPE**

**PUPILLA**

Relay type photocell - pair for outdoors - 180° rotational lens adjustable

RELAY TYPE PHOTOCELLS	
ELECTRICAL DATA	
POWER SUPPLY	24V AC/DC
CURRENT	TX 40MA (VDC) - 75MA (VAC) - RX 20MA (VDC) - 40MA (VAC)
PERFORMANCE DATA	
ESTIMATED RANGE (M)	20-25
ADJUSTABILITY	180° HORIZONTAL
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP44
OPERATING TEMP (°C MIN/MAX)	-20 - +70
DIMENSIONS (MM)	110 X 35 X 35

**NICE HIGH-SPEED  
UNDERGROUND  
KITS**



Turn to page **18**



## BENINCA PUPILLA SYNCHRONISED SOLAR POWERED TYPE SAFETY PHOTOCELLS



### PHOTOCELLS SOLAR POWERED TYPE

PUPILLA.B

Wireless solar powered photocell - pair for outdoors - 220° rotational lens adjustable

SOLAR POWERED TYPE PHOTOCELLS	
PUPILLA B	
ELECTRICAL DATA	
POWER SUPPLY TRANSMITTER	1.8-5V FROM BATTERY - 2.4V 600MAH X2 AAA
POWER SUPPLY RECEIVER	24V AC/DC
CURRENT TRANSMITTER	0.35MA @ 2.4V
CURRENT RECEIVER	70MA MAX
PERFORMANCE DATA	
ESTIMATED RANGE (M)	20 (30 IN OPTIMAL CONDITIONS)
ADJUSTABILITY	220° HORIZONTAL
SOLAR PANEL	
OVERALL DIMENSIONS	43 X 185 X 12
RECHARGE CURRENT	30MA WITH 50000 LUX (SUN) - 10MA WITH 20000 LUX (VARIABLE WEATHER) - 0.5MA CON 2000 (CLOUDS)
RECHARGE VOLTAGE	4.5V
DURATION OF CHARGE	96H
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP44
OPERATING TEMP (°C MIN/MAX)	-10 - +50
DIMENSIONS (MM)	110 X 35 X 35



## JCM TECH PHOTO360 DB PLUS SYNCHRONISED WIRELESS SAFETY PHOTOCELLS

NEW



### ADJUSTABLE WIRELESS PHOTOCELLS RELAY TYPE

PHOTO360

Relay type - wireless photocell - pair for outdoors - rotational 180° - angle 30° adjustable

#### SPARES & ACCESSORIES

PHOTO-DBPLUSBATT

CR 123a replacement battery

WIRELESS TYPE PHOTOCELLS	
PHOTO360DB PLUS	
ELECTRICAL DATA	
POWER SUPPLY TRANSMITTER	3V BATTERY CR123A
POWER SUPPLY RECEIVER	12/24V AC/DC
CURRENT TRANSMITTER	110UA
CURRENT RECEIVER	40MA MAX
OUTPUT CONTACT	FOR SOLID STATE RELAY - (C, NC) MAX 350MA & 40VDC PROTECTED FROM INDUCTIVE LOADS
PERFORMANCE DATA	
ESTIMATED RANGE (M)	10M JPOWER OPEN - 20M JPOWER CLOSE
ADJUSTABILITY	180° HORIZONTAL
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP54
OPERATING TEMP (°C MIN/MAX)	-20 - +55
DIMENSIONS (MM)	38 X 103 X 36



Turn to page 97



**NICE  
PPH**  
PHOTOCELLS POSTS FOR  
NICE ERA PHOTOCELLS

**PHOTOCELL POSTS FOR NICE ERA PHOTOCELLS**

PPH1	Aluminium column with protective housing for 1 photocell - 500mm tall
PPH2	Aluminium column with protective housing for 1 photocell - 1000mm tall
<b>FOR USE WITH</b>	
EPM	Relay type photocell - pair for outdoors
EPMO	Relay type photocell - pair for outdoors - 30° adjustable
EPMB	BlueBUS type photocell - pair for outdoors
EPMOB	BlueBUS type photocell - pair for outdoors - 30° adjustable



**BENINCA  
COL.P**  
PHOTOCELL POSTS FOR  
BENINCA PUPILLA  
PHOTOCELLS

**PHOTOCELL POSTS FOR BENINCA PUPILLA PHOTOCELLS**

COL.P	Aluminium column with protective housing for 1 photocell - 500mm tall
<b>FOR USE WITH</b>	
PUPILLA B	Wireless solar powered photocell - pair for outdoors - 220° rotational lens adjustable
PUPILLA	Relay type photocell - pair for outdoors - 180° rotational lens adjustable

**NEED PRE OR POST  
SALES TECHNICAL  
SUPPORT?**  
OUR FRIENDLY  
TEAM ARE HERE TO  
HELP

Call us on  
0113 201 6677 or email  
Info@rollingcenter.co.uk



NEW



## BEA LZR I110 LASER CURTAIN SAFETY SCANNER

The **LZR-I110** works according to the principle of time of flight. This high-precision technology and the dynamic orientation of the LASER beams on 4 planes offer optimal safety in the door threshold and its proximity.

The sensor is adapted to industrial environments and has a max. detection range of 5m x 5 m.

### LASER CURTAIN SAFETY SCANNER 5M RANGE

<b>BEALZR110</b>		Safety laser scanner - up to 5m range
<b>SPARES &amp; ACCESSORIES</b>		
<b>BEA LASER BRACKET</b>		Mounting bracket for BEA LZR
<b>BEA REMOTE CONTROL</b>		BEA remote control for BEA LZR
<b>LASER SAFETY CURTAIN</b>		
<b>ELECTRICAL DATA</b>		
<b>POWER SUPPLY</b>		<b>12/24VDC</b>
<b>POWER CONSUMPTION</b>		<b>5W MAX</b>
<b>OUTPUT</b>		<b>2 ELECTRONIC RELAYS (GALVANIC ISOLATION - POLARITY FREE)</b>
<b>MAX SWITCHING VOLTAGE / CURRENT</b>		<b>35VDC - 24VAC - 80MA (RESISTIVE)</b>
<b>PERFORMANCE DATA</b>		
<b>RESPONSE TIME / DETECTION RANGE (M)</b>		<b>TYP. 20MS MAX 80MS / 5 X 5</b>
<b>EMISSION CHARACTERISTICS</b>		<b>LASER INFRARED (CLASS1) - 905NM MAX OUTPUT PULSE POWER 75W</b>
<b>EMISSION CHARACTERISTICS</b>		<b>LASER RED VISIBLE (CLASS 3R) - 650NM MAX OUTPUT CW POWER 3MW</b>
<b>DIMENSIONAL &amp; GENERAL DATA</b>		
<b>PROTECTION LEVEL</b>		<b>IP65</b>
<b>OPERATING TEMP (°C MIN/MAX)</b>		<b>-30 - +60 IF POWERED</b>
<b>DIMENSIONS (MM)</b>		<b>125 X 93 X 70</b>



NEW



## BEA LZR I100 LASER CURTAIN SAFETY SCANNER

The **LZR-I100** works according to the principle of time of flight. This high-precision technology and the dynamic orientation of the LASER beams on 4 planes offer optimal safety in the door threshold and its proximity.

The sensor is adapted to industrial environments and has a max. detection range of 9.9 m x 9.9 m.

### LASER CURTAIN SAFETY SCANNER 10M RANGE

<b>BEALZR100</b>		Safety laser scanner - up to 10m range
<b>SPARES &amp; ACCESSORIES</b>		
<b>BEA LASER BRACKET</b>		Mounting bracket for BEA LZR
<b>BEA REMOTE CONTROL</b>		BEA remote control for BEA LZR
<b>LASER SAFETY CURTAIN</b>		
<b>ELECTRICAL DATA</b>		
<b>POWER SUPPLY</b>		<b>12/24VDC</b>
<b>POWER CONSUMPTION</b>		<b>5W MAX</b>
<b>OUTPUT</b>		<b>2 ELECTRONIC RELAYS (GALVANIC ISOLATION - POLARITY FREE)</b>
<b>MAX SWITCHING VOLTAGE / CURRENT</b>		<b>35VDC - 24VAC - 80MA (RESISTIVE)</b>
<b>PERFORMANCE DATA</b>		
<b>RESPONSE TIME / DETECTION RANGE (M)</b>		<b>TYP. 20MS MAX 80MS / 9.9 X 9.9</b>
<b>EMISSION CHARACTERISTICS</b>		<b>LASER INFRARED (CLASS1) - 905NM MAX OUTPUT PULSE POWER 75W</b>
<b>EMISSION CHARACTERISTICS</b>		<b>LASER RED VISIBLE (CLASS 3R) - 650NM MAX OUTPUT CW POWER 3MW</b>
<b>DIMENSIONAL &amp; GENERAL DATA</b>		
<b>PROTECTION LEVEL</b>		<b>IP65</b>
<b>OPERATING TEMP (°C MIN/MAX)</b>		<b>-30 - +60 IF POWERED</b>
<b>DIMENSIONS (MM)</b>		<b>125 X 93 X 70</b>



## BEA LZRH100 LASER CURTAIN SAFETY SCANNER

The **LZR-H100** laser safety scanner offers a real alternative to induction loops: time gain during installation, detection of all types of vehicles and greater adaptability. This laser sensor for rising barriers is used to open, secure and/or detect a presence.

It offers great flexibility in defining the width and depth of the detection zones (max detection field of 9.9 m x 9.9 m).

### LASER CURTAIN SAFETY SCANNER 10M RANGE

BEALZH100

Safety laser scanner - up to 10m range

#### SPARES & ACCESSORIES

BEA LASER BRACKET

Mounting bracket for BEA LZR

BEA REMOTE CONTROL

BEA remote control for BEA LZR

LASER SAFETY CURTAIN	
LZRH100	
ELECTRICAL DATA	
POWER SUPPLY	12/24VDC
POWER CONSUMPTION	5W MAX
OUTPUT / INPUT	2 ELECTRONIC RELAYS / 1 OPTOCOUPLER (GALVANIC ISOLATION - POLARITY FREE)
MAX SWITCHING VOLTAGE / CURRENT	35VDC - 24VAC - 80MA
PERFORMANCE DATA	
RESPONSE TIME / DETECTION RANGE (M)	TYP. 20MS MAX 80MS / 5 X 5
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP65
OPERATING TEMP (°C MIN/MAX)	-30 - +60 IF POWERED - -10 - +60 UNPOWERED
DIMENSIONS (MM)	125 X 93 X 70



## NICE WLT MULTI-FUNCTIONAL LED INDICATOR LIGHT

### MULTIFUNCTIONAL NEUTRAL LED INDICATOR

WLT

12/24v ac/dc - LED indicator light - neutral



## NICE EL FLASHING LED SIGNAL LIGHT WITH BUILT-IN AERIAL

### FLASHING NEUTRAL LED SIGNAL LIGHT

ELAC

230v - LED flashing signal light - neutral - built-in aerial - IP44

ELDC

24v - LED flashing signal light - neutral - built-in aerial - IP44



**BENINCA  
LAMPY**  
FLASHING LED SIGNAL LIGHT  
WITH BUILT-IN AERIAL



**FLASHING YELLOW LED SIGNAL LIGHT**

LAMPY	12-255v - LED flashing signal light - yellow - built-in aerial
-------	--



**BENINCA  
IRI.LAMP**  
FLASHING LED SIGNAL LIGHT  
WITH BUILT-IN AERIAL



**FLASHING NEUTRAL LED SIGNAL LIGHT**

IRI.LAMP	12-255v - LED flashing signal light - neutral - built-in aerial
----------	---



**BENINCA  
IRI.LAMP-Y**  
YELLOW FLASHING LED  
SIGNAL LIGHT WITH  
BUILT-IN AERIAL



**FLASHING YELLOW LED SIGNAL LIGHT**

IRI.LAMP-Y	12-255v - LED flashing signal light - yellow - built-in aerial
------------	--





**MICROTRONICS  
BLUEFORCE**  
FORCE TESTER KIT WITH  
BRACKET ARM-SET

**GATE FORCE TESTER**

**BLUEFORCE**

Force testing instruments for automatic gates and doors

FORCE TESTER	
KMG LITE	
ELECTRICAL DATA	
POWER SUPPLY	9V ALKALINE BATTERY
PERFORMANCE DATA	
MEMORY CAPACITY	80 TESTS
FORCE ACQ	INTERVAL 6 SEC - SAMPLING AT 1KHZ
FORCE MEASUREMENT RANGE	0-200N (MECHANICAL STOP AT APPROX 2100N)
FORCE MEASUREMENT RESOLUTION	1N
BLE INTERFACE	BLUETOOTH VERSION 4.1
USB INTERFACE	V.2.0 SPECIFICATION COMPLIANT
DIMENSIONAL & GENERAL DATA	
DIMENSIONS (MM)	280 X 80 X 50
WEIGHT (KG)	1.6



**GTE  
KMG LITE**  
FORCE TESTER KIT

**GATE FORCE TESTER**

**KMG LITE-BT**

Force testing instruments for automatic gates and doors

**SPARES & ACCESSORIES**

**KMG LITE ARMS**

Spacer arm-set, robust measurement tripod, distance pieces.

FORCE TESTER	
KMG LITE	
ELECTRICAL DATA	
POWER SUPPLY	3X 1.5V - AA BATTERIES
CURRENT	25MA
BATTERY DUTY	> 100 HOURS
PERFORMANCE DATA	
MEASUREMENT RANGE	25N - 1600N
MEASUREMENT ACCURACY	TYP $\pm 0.4\%$ OF 2000N @ T=20°C
SPRING RATE (MECH. FILTER)	500 N/MM
DIMENSIONAL & GENERAL DATA	
WORKING TEMP (°C MIN/MAX)	0 - +40
PLATE DIMENSIONS (MM)	80Ø HEIGHT 50
DIMENSIONS (MM)	250 X 80 X 50
WEIGHT (KG)	1

**ROLLING CENTER  
WHATSAPP  
TECHNICAL**

Scan  
the  
QR  
code  
for  
instant  
help





ROLLING CENTER  
MG GATE SAFETY SIGN  
SAFETY SIGN FOR SWING &  
SLIDING GATE AUTOMATION



GATE SAFETY WARNING SIGN FOR SWING AND SLIDING GATES

MG SIGN SWING

Swing gate warning sign - 200 x 250mm - 1mm rigid PVC

MG SIGN SLIDING

Sliding gate warning sign - 200 x 250mm - 1mm rigid PVC

ROLLING CENTER  
CAVO  
FALL PROTECTION CABLE



FALL PROTECTION CABLE

CAVO 1

Fall protection cable - 300mm length - 9mm diameter cable - M12 bar 180mm

CAVO 2

Fall protection cable - 500mm length - 9mm diameter cable - M12 bar 180mm

CAVO 3

Fall protection cable - 700mm length - 9mm diameter cable - M12 bar 180mm

WE ARE DISTRIBUTORS OF LOCINOX PRODUCTS

LOCINOX

DID YOU KNOW?



WHETHER YOU REQUIRE MECHANICAL LOCKS, SLIDING OR SWING GATE LOCKS OR GATE CLOSERS. WE CAN SUPPLY THE WHOLE RANGE AT VERY COMPETITIVE PRICES

PLEASE CONTACT US WITH YOUR REQUIREMENTS - 0113 201 6677



## ASO SKL-15-10 KS2 GATE SAFETY EDGES

The **SENTIR KS4 15.10** edge safety edges of ASO Safety Solutions are pressure-sensitive sensors applied to ensure the safety of closing edges at potential crushing or shearing points which are prone to accidents.

They may be installed in the case of automatic gates, machines and other facilities for handling equipment or moving stage elements in order to protect individuals from bodily harm or machinery from damage.

### KS2 15MM THROUGH & END RESISTIVE EDGES

ASO1.0M/15MM/E/EDGE	ASO 1m 15mm resistive end edge
ASO1.0M/15MM/T/EDGE	ASO 1m 15mm resistive through edge
ASO1.5M/15MM/E/EDGE	ASO 1.5m 15mm resistive end edge
ASO1.5M/15MM/T/EDGE	ASO 1.5m 15mm resistive through edge
ASO2.0M/15MM/E/EDGE	ASO 2.0m 15mm resistive end edge
ASO2M/15MM/T/EDGE	ASO 2.0m 15mm resistive through edge
ASO2.5M/15MM/E/EDGE	ASO 2.5m 15mm resistive end edge
ASO2.5M/15MM/T/EDGE	ASO 2.5m 15mm resistive through edge

### SENTIR EDGE 15-10TT SAFETY EDGE PROFILE

DIMENSIONAL & GENERAL DATA		15-10TT
MATERIAL	TPE (THERMOPLASTIC ELASTOMERS)	
WEIGHT (KG/M)	0.10	
PROTECTION LEVEL	IP65	
ABSORPTION SWITCHING CYCLES	10,000	
SWITCHING ANGLES	2 X 20°	
ACTUATION RESISTANCE	≤ 500 OHM	
ELECTRICAL CAPACITY	24V 10MA	
OPERATING TEMP (°C MAX/MIN)	-10 - +55	
MAX TEMP RANGE (°C MAX/MIN)	-25 - +75	
MAX LENGTH OF CONNECTED EDGES	100M	
CONNECTION CABLES	LIY11Y 2X0.34MM	
DIMENSIONS (MM)	15.5 X 9.1	



## ASO KS2 SKL-15-10 SAFETY EDGE COMPONENTS

### KS2 15MM SAFETY EDGE COMPONENTS

SKL15-10 TT	SKL15 10TT rubber profile for 8.2Kohm resistive safety edges
KS2L2.5	KS2 2.5 meter cable
KS2W	KS2 2.5 meter cable
AL15-9	Aluminium profile for SKL15-10 (per meter)

**WE STOCK A WIDE  
RANGE OF ASO  
SAFETY  
PRODUCTS  
WE SUPPLY MADE  
TO MEASURE EDGES  
& COMPONENTS AT  
COMPETITIVE  
PRICES**

Please get in touch with your requirements.



## ASO GF15.25TT KS4 GATE SAFETY EDGES

The **SENTIR KS4 15.25** edge safety edges of ASO Safety Solutions are pressure-sensitive sensors applied to ensure the safety of closing edges at potential crushing or shearing points which are prone to accidents.

They may be installed in the case of automatic gates, machines and other facilities for handling equipment or moving stage elements in order to protect individuals from bodily harm or machinery from damage.



### KS4 24MM THROUGH & END RESISTIVE EDGES

AS01.0M/24MM/E/EDGE	ASO 1m 24mm resistive end edge
AS01.0M/24MM/T/EDGE	ASO 1m 24mm resistive through edge
AS01.5M/24MM/E/EDGE	ASO 1.5m 24mm resistive end edge
AS01.5M/24MM/T/EDGE	ASO 1.5m 24mm resistive through edge
AS02.0M/24MM/E/EDGE	ASO 2.0m 24mm resistive end edge
AS02.0M/24MM/T/EDGE	ASO 2.0m 24mm resistive through edge
AS02.5M/24MM/E/EDGE	ASO 2.5m 24mm resistive end edge
AS02.5M/24MM/T/EDGE	ASO 2.5m 24mm resistive through edge

SENTIR EDGE 15-25TT SAFETY EDGE PROFILE	
DIMENSIONAL & GENERAL DATA	15-25TT
MATERIAL	TPE (THERMOPLASTIC ELASTOMERS)
WEIGHT (KG/M)	0.21
PROTECTION LEVEL	IP67
ABSORPTION SWITCHING CYCLES	10,000
SWITCHING ANGLES	2 X 45°
ACTUATION RESISTANCE	≤ 500 OHM
ELECTRICAL CAPACITY	24V 10MA
OPERATING TEMP (°C MAX/MIN)	-10 - +50
MAX TEMP RANGE (°C MAX/MIN)	-25 - +75
MAX LENGTH OF CONNECTED EDGES	100M
CONNECTION CABLES	LY11Y 2X0.34MM <sup>2</sup>
DIMENSIONS (MM)	15.5 X 23.5

## ASO GF15.25TT SAFETY EDGE COMPONENTS



### KS4 24MM SAFETY EDGE COMPONENTS

GF15.25TT	GF15.25TT rubber profile for 8.2Kohm resistive safety edges
KS4L2.5M-15.25-SET	KS4 2.5 meter cable
KS4W-15.25-SET	KS4 resistor plug 8.2Kohm
AL15-9	Aluminium profile for GF15.25TT

**LOOKING FOR  
SWING GATE  
HARDWARE  
EQUIPMENT?**

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)  
or call 0113 201 6677 for  
more information.



### KS4 30MM THROUGH & END RESISTIVE EDGES

AS01.0M/30MM/E/EDGE	ASO 1m 30mm resistive end edge
AS01.0M/30MM T/EDGE	ASO 1m 30mm resistive through edge
AS01.5M/30MM/E/EDGE	ASO 1.5m 30mm resistive end edge
AS01.5M/30MM/T/EDGE	ASO 1.5m 30mm resistive through edge
AS02.0M/30MM/E/EDGE	ASO 2.0m 30mm resistive end edge
AS02M/30MM/T/EDGE	ASO 2.0m 30mm resistive through edge
AS02.5M/30MM/T/EDGE	ASO 2.5m 30mm resistive end edge
AS02.5/30MM/E/EDGE	ASO 2.5m 30mm resistive through edge

### ASO GF25.30TT KS4 GATE SAFETY EDGES

The **SENTIR KS4 25.30** edge safety edges of ASO Safety Solutions are pressure-sensitive sensors applied to ensure the safety of closing edges at potential crushing or shearing points which are prone to accidents.

They may be installed in the case of automatic gates, machines and other facilities for handling equipment or moving stage elements in order to protect individuals from bodily harm or machinery from damage.

#### SENTIR EDGE 25.30TT SAFETY EDGE PROFILE

DIMENSIONAL & GENERAL DATA		25.30TT
MATERIAL		TPE (THERMOPLASTIC ELASTOMERS)
WEIGHT (KG/M)		0.34
PROTECTION LEVEL		IP67
ABSORPTION SWITCHING CYCLES		10,000
SWITCHING ANGLES		2 X 45°
ACTUATION RESISTANCE		≤ 500 OHM
ELECTRICAL CAPACITY		24V 10MA
OPERATING TEMP (°C MAX/MIN)		-10 - +50
MAX TEMP RANGE (°C MAX/MIN)		-25 - +75
MAX LENGTH OF CONNECTED EDGES		100M
CONNECTION CABLES		LIY11Y 2X0.34MM²
DIMENSIONS (MM)		25 X 30



### ASO GF25.30TT KS4 SAFETY EDGE COMPONENTS

### KS4 30MM SAFETY EDGE COMPONENTS

GF25.30TT	GF25.30TT rubber profile for 8.2Kohm resistive safety edges
KS4L2.5-25.30-SET	KS4 2.5 meter cable
KS4W8K2-25.30	KS4 resistor plug 8.2Kohm
AL25-14	Aluminium profile for GF25.30TT

**NEED ASSISTANCE  
WITH CHOOSING  
THE RIGHT KIT?**

Call us on  
**0113 201 6677** our friendly  
team are here to help.



## ASO GEF45.ST KS4 GATE SAFETY EDGES

The **SENTIR KS4 45.ST** edge safety edges of ASO Safety Solutions are pressure-sensitive sensors applied to ensure the safety of closing edges at potential crushing or shearing points which are prone to accidents.

They may be installed in the case of automatic gates, machines and other facilities for handling equipment or moving stage elements in order to protect individuals from bodily harm or machinery from damage.



### KS4 45MM THROUGH & END RESISTIVE EDGES

AS01.0M/45MM/E/EDGE

ASO 1m 45mm resistive end edge

AS01.0M/45MM/T/EDGE

ASO 1m 45mm resistive through edge

AS01.5M/45MM/E/EDGE

ASO 1.5m 45mm resistive end edge

AS01.5M/45MM/T/EDGE

ASO 1.5m 45mm resistive through edge

AS02.0M/45MM/E/EDGE

ASO 2.0m 45mm resistive end edge

AS02M/45MM/T/EDGE

ASO 2.0m 45mm resistive through edge

AS02.5M/45MM/E/EDGE

ASO 2.5m 45mm resistive end edge

AS02.5/45MM/T/EDGE

ASO 2.5m 45mm resistive through edge

SENTIR EDGE 45.ST SAFETY EDGE PROFILE	
DIMENSIONAL & GENERAL DATA	45.ST
MATERIAL	TPE (THERMOPLASTIC ELASTOMERS)
WEIGHT (KG/M)	0.35
PROTECTION LEVEL	IP67
ABSORPTION SWITCHING CYCLES	10,000
SWITCHING ANGLES	2 X 45°
ACTUATION RESISTANCE	≤ 500 OHM
ELECTRICAL CAPACITY	24V 10MA
OPERATING TEMP (°C MAX/MIN)	-10 - +50
MAX TEMP RANGE (°C MAX/MIN)	-25 - +75
MAX LENGTH OF CONNECTED EDGES	100M
CONNECTION CABLES	LIY11Y 2X0.34MM <sup>2</sup>
DIMENSIONS (MM)	35 X 45

## ASO GEF45.ST KS4 SAFETY EDGE COMPONENTS



### KS4 45MM SAFETY EDGE COMPONENTS

GEF45.ST

GEF45.ST rubber profile for 8.2Kohm resistive safety edges

KS4L2.5M-45-SET

KS4 2.5 meter cable

KS4W-45-SET

KS4 resistor plug 8.2Kohm

AL30-10

Aluminium profile for GEF45.ST

**LOOKING FOR  
SLIDING GATE  
AUTOMATION  
EQUIPMENT?**

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)  
or call 0113 201 6677 for  
more information.



### KS4 65MM THROUGH & END RESISTIVE EDGES

AS01.0M/65MM/E/EDGE	ASO 1m 65mm resistive end edge
AS01.0M/65MM/T/EDGE	ASO 1m 65mm resistive through edge
AS01.5M/65MM/E/EDGE	ASO 1.5m 65mm resistive end edge
AS01.5M/65MM/T/EDGE	ASO 1.5m 65mm resistive through edge
AS02.0M/65MM/E/EDGE	ASO 2.0m 65mm resistive end edge
AS02.0M/65MM/T/EDGE	ASO 2.0m 65mm resistive through edge
AS02.5M/65MM/E/EDGE	ASO 2.5m 65mm resistive end edge
AS02.5M/65MM/T/EDGE	ASO 2.5m 65mm resistive through edge

### ASO GEF65.ST KS4 GATE SAFETY EDGES

The **SENTIR KS4 65.ST** edge safety edges of ASO Safety Solutions are pressure-sensitive sensors applied to ensure the safety of closing edges at potential crushing or shearing points which are prone to accidents.

They may be installed in the case of automatic gates, machines and other facilities for handling equipment or moving stage elements in order to protect individuals from bodily harm or machinery from damage.

SENTIR EDGE 65.ST SAFETY EDGE PROFILE	
65.ST	
DIMENSIONAL & GENERAL DATA	
MATERIAL	TPE (THERMOPLASTIC ELASTOMERS)
WEIGHT (KG/M)	0.50
PROTECTION LEVEL	IP67
ABSORPTION SWITCHING CYCLES	10,000
SWITCHING ANGLES	2 X 45°
ACTUATION RESISTANCE	≤ 500 OHM
ELECTRICAL CAPACITY	24V 10MA
OPERATING TEMP (°C MAX/MIN)	-10 - +50
MAX TEMP RANGE (°C MAX/MIN)	-25 - +75
MAX LENGTH OF CONNECTED EDGES	100M
CONNECTION CABLES	LIY11Y 2X0.34MM²
DIMENSIONS (MM)	35 X 65



### KS4 65MM SAFETY EDGE COMPONENTS

GEF65.ST	GEF45.ST rubber profile for 8.2Kohm resistive safety edges
KS4L2.5M-65-SET	KS4 2.5 meter cable
KS4W-65-SET	KS4 resistor plug 8.2Kohm
AL3-10	Aluminium profile for GEF65.ST

### ASO GEF65.ST KS4 SAFETY EDGE COMPONENTS

**NEED ACCESS  
CONTROL  
SOLUTIONS?**

See page **83** for details



## ASO GEF85.ST KS4 GATE SAFETY EDGES

The **SENTIR KS4 85.ST** edge safety edges of ASO Safety Solutions are pressure-sensitive sensors applied to ensure the safety of closing edges at potential crushing or shearing points which are prone to accidents.

They may be installed in the case of automatic gates, machines and other facilities for handling equipment or moving stage elements in order to protect individuals from bodily harm or machinery from damage.



### KS4 85MM THROUGH & END RESISTIVE EDGES

AS01.0M/85MM/E/EDGE

ASO 1m 85mm resistive end edge

AS01.0M/85MM /T/EDGE

ASO 1m 85mm resistive through edge

AS01.5M/85MM/E/EDGE

ASO 1.5m 85mm resistive end edge

AS01.5M/85MM/T/EDGE

ASO 1.5m 85mm resistive through edge

AS02.0M/85MM/E/EDGE

ASO 2.0m 85mm resistive end edge

AS02.0M/85MM/T/EDGE

ASO 2.0m 85mm resistive through edge

AS02.5M/85MM/E/EDGE

ASO 2.5m 85mm resistive end edge

AS02.5M/85MM/T/EDGE

ASO 2.5m 85mm resistive through edge

SENTIR EDGE 85.ST SAFETY EDGE PROFILE	
DIMENSIONAL & GENERAL DATA	85.ST
MATERIAL	TPE (THERMOPLASTIC ELASTOMERS)
WEIGHT (KG/M)	0.63
PROTECTION LEVEL	IP65
ABSORPTION SWITCHING CYCLES	10,000
SWITCHING ANGLES	2 X 45°
ACTUATION RESISTANCE	≤ 500 OHM
ELECTRICAL CAPACITY	24V 10MA
OPERATING TEMP (°C MAX/MIN)	-10 - +50
MAX TEMP RANGE (°C MAX/MIN)	-25 - +75
MAX LENGTH OF CONNECTED EDGES	100M
CONNECTION CABLES	LY11Y 2X0.34MM <sup>2</sup>
DIMENSIONS (MM)	35 X 85

## ASO GEF85.ST KS4 SAFETY EDGE COMPONENTS



### KS4 85MM SAFETY EDGE COMPONENTS

GEF85.ST

GEF85.ST rubber profile for 8.2Kohm resistive safety edges

KS4L2.5M-85-SET

KS4 2.5 meter cable

KS4W-85-SET

KS4 resistor plug 8.2Kohm

AL30-10

Aluminium profile for SKL15-10 (per meter)

**NICE & BENINCA**  
SLIDING GATE  
AUTOMATION

See page 8



**ASO  
INDUS**  
COMPACT MOUNTING  
UNIT KIT**COMPACT MOUNTING KIT FOR SLIDING GATES**

INDUSKIT	Compact mounting kit - for sliding gates - up to 20m
ISK71-242	ASO inductive relay controller only
SK32-242	ASO ELMON CAT 3 swing gate controller
SPK55	ASO stationary coil

	COMPACT MOUNTING KIT
ELECTRICAL DATA	INDUS RAIL
POWER SUPPLY	24V AC/DC
CURRENT	85MA MAX180MA
RELAY CONTACT	30V AC/DC 3A
DIMENSIONAL & GENERAL DATA	
PROTECTION	IP20
WORKING TEMP (°C MIN/MAX)	-25 - +55

**BENINCA  
AFFKIND**  
FINGER KEEPER FOR  
HINGE GAPS**BLACK RUBBER FINGER KEEPER FOR GATE HINGES**

AFFKINDX	2.5m length - 157mm wide - finger keeper - with aluminium side rail
AFFKINDWB	2.1m length - 260mm wide - finger keeper - with aluminium side rail

	FINGER KEEPER	
DIMENSIONAL & GENERAL DATA	AFFKINDX	AFFKINDWB
DESCRIPTION	STANDARD VERSION - RP62	STANDARD VERSION - RP62
WIDTH (MM)	157	260
LENGTH (MM)	2500	2100
COLOUR VERSION	ALUMINIUM / BLACK	
SEAL LENGTH (MM)	2500	2100
FINISHES	SATIN ALUMINIUM / BLACK EPMD RUBBER	
FIXING METHOD	ZINC PLATED CROSS RECESS HEAD S.T SCREWS - SLOTTED FIXING HOLES - PUSH-IN COVER STRIP	

**AUTOMATION &  
HARDWARE  
TRAINING  
COURSES  
AVAILABLE ON  
REQUEST**Call us on  
**0113 201 6677** for more  
details.



## BENINCA SC.RF WIRELESS SAFETY EDGE RECEIVER



### WIRELESS SAFETY EDGE RECEIVER

SC.RF

2 channel receiver for wireless safety edges - 868mhz

SAFETY EDGE RECEIVER	
SC.RF	
<b>ELECTRICAL DATA</b>	
POWER SUPPLY	12/24V AC/DC
CURRENT	66MA MAX
RELAY CONTACT	24VDC 1A
CHANNELS	2 (4 DEVICES MAX FOR EACH CHANNEL)
<b>PERFORMANCE DATA</b>	
FREQUENCY	868MHZ
NOMINAL RANGE	WITH ANTENNA 100M - WITHOUT ANTENNA 30M
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
PROTECTION	IP30
WORKING TEMP (°C MIN/MAX)	-20 - +50

## BENINCA RF WIRELESS SAFETY EDGE TRANSMITTER



### WIRELESS SAFETY EDGE TRANSMITTER

RF

Transmitter for wireless safety edge - 2x AA battery powered - 868mhz



SAFETY EDGE TRANSMITTER	
RF	
<b>ELECTRICAL DATA</b>	
POWER SUPPLY	2X 1.5V ALKALINE 2.7AH BATTERIES
OPERATING FREQUENCY	868MHZ
<b>PERFORMANCE DATA</b>	
MAX RANGE IN OPTIMAL CONDITIONS (M)	100
USEFUL RANGE (M)	30
BATTERY LIFE	MAXIMUM 3 YEARS WITH 10 OPENINGS / DAY
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
DIMENSIONS (MM)	500 X 42 X 45
OPERATING TEMP (°C MIN/MAX)	-20 - +70



**ROLLING CENTER  
RB3RX  
WIRELESS SAFETY EDGE  
RECEIVER**

**RB3RX**

4 channel receiver for wireless safety edges - 868/433mhz - up to 4 edges

3G SAFETY EDGE RECEIVER	
RB3RX	
<b>ELECTRICAL DATA</b>	
POWER SUPPLY	12/24V AC/DC
CURRENT	MAX 255MA
<b>PERFORMANCE DATA</b>	
FREQUENCY	868 / 433 MHZ
NOMINAL RANGE (M)	50
MEMORY	6 TRANSMITTERS (3 IN RELAY 1, 3 IN RELAY 2)
RELAY OUTPUTS	3 RELAYS
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
PROTECTION LEVEL	IP54 (IP 65 WITH GLAND SEALS)
WORKING TEMP (°C MIN/MAX)	-40 - +85
BOX DIMENSIONS (MM)	82 X 190 X 40



**ROLLING CENTER  
RB3TX  
WIRELESS SAFETY EDGE  
TRANSMITTER**

**RB3TX**

4 channel transmitter for wireless safety edges - 868/433mhz - up to 2 edges

3G SAFETY EDGE RECEIVER	
RB3RX	
<b>ELECTRICAL DATA</b>	
POWER SUPPLY	2X 3.6VDC ER14500 LI-SOCL LITHIUM BATTERIES
<b>PERFORMANCE DATA</b>	
FREQUENCY	868 / 433 MHZ
NOMINAL RANGE (M)	50
CONTROLS	CONTROLS UP TO 2 SAFETY EDGES ON ONE TRANSMITTER
BATTERY LIFE	APPROX 2 YEARS
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
PROTECTION LEVEL	IP65
WORKING TEMP (°C MIN/MAX)	-20 - +85
BOX DIMENSIONS (MM)	151 X 60 X 23

**NEED ASO SAFETY  
EDGES TO MAKE  
YOUR GATE  
COMPLIANT?**

See page **71** for details



**BENINCA**  
**SC.EN**  
 2 CHANNEL CONTROL  
 INTERFACE RELAY



**SAFETY EDGE CONTROL INTERFACE RELAY**

SC.EN
 2 channel 8.2Kohm interface relay

	SAFETY EDGE CONTROL INTERFACE RELAY
ELECTRICAL DATA	SC.EN
POWER SUPPLY	12/24V AC/DC
ABSORBED POWER	1W
INPUT CHANNELS	2 INPUTS FOR 8.2K SENSITIVE SAFETY EDGES
OUTPUT CHANNELS	2 OUTPUT CHANNELS WITH NO & NC RELAYS AND SELF TEST CIRCUIT
DIMENSIONAL & GENERAL DATA	
WORKING TEMP (°C MIN/MAX)	-20 - +70



**NICE**  
**TCE**  
 2 CHANNEL CONTROL  
 INTERFACE RELAY



**SAFETY EDGE CONTROL INTERFACE RELAY**

TCE
 2 channel 8.2Kohm interface relay

	SAFETY EDGE CONTROL INTERFACE RELAY
ELECTRICAL DATA	TCE
POWER SUPPLY	12/24VDC
CURRENT	24VAC 200MA RMS - 24VDC 50MA
PHOTOTEST INPUT VOLATGE	SAME AS INPUT VOLTAGE
OUTPUT RELAY CONTACTS	MAX 0.5A AND MAX 48VAC - 1X INPUT / 2X OUTPUT
PERFORMANCE DATA	
ADAPTED TECHNOLOGY	2 CHANNELS WITH WINDOW COMPARATORS AND RELAY OUTPUT
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP20
WORKING TEMP (°C MIN/MAX)	-20 - +55
BOX DIMENSIONS (MM)	60 X 59 X 422

**WE STOCK A WIDE RANGE OF ASO SAFETY PRODUCTS WE SUPPLY MADE TO MEASURE EDGES & COMPONENTS AT COMPETITIVE PRICES**

Please get in touch with your requirements.



Handwriting practice area consisting of 30 horizontal dashed lines.

# '22

2022 TRADE CATALOGUE

GATE HARDWARE  
GATE AUTOMATION  
ACCESS CONTROL  
GATE SAFETY  
ALUMINIUM GATES



**TEL.** 0113 201 6677

# SECTION C

# ACCESS CONTROL

KEYPADS	84
KEYPADS WITH PROXIMITY	87
PROXIMITY READERS	88
GSM SWITCHES	89
PAL INTERGRATED ACCESS CONTROL SOLUTIONS	92
TIMERS	95
RELAYS	95
MAGNETIC PROBE LOOP DETECTORS	97
LOOP DETECTORS	98
EXIT BUTTONS	99
NO TOUCH EXIT BUTTONS	100
KEY SWITCHES	101
POWER SUPPLIES	103
EMERGENCY BUTTONS	105
CABLES	106
ENCLOSURES	107
CONSUMABLES	108
ARMoured DOOR LOOPS	109
PROGRAMMING UNITS	109



## SRS DC60SS STANDALONE DIGITAL KEYPAD

The **DC60SS** external standalone keypad with illuminated keypad is a very popular easy to install access control keypad, it features 2 relays allowing control of up to 2 systems e.g. car gate and pedestrian gate.

Each unit can use and store up to 108 codes (4-8 digits) with programmable lock time from 0-999 seconds). Each relay has a LED confirmation light



### SURFACE MOUNT STANDALONE KEYPAD

<b>DC60SS</b>	Digital keypad - 2 relays - surface mount - vandal resistant - illuminated keypad
<b>SPARES &amp; ACCESSORIES</b>	
<b>12V-1A-PSU</b>	12v power supply with 1 amp output includes a 2.4m lead and UK plug

SRS DC60SS KEYPAD	
ELECTRICAL DATA	
POWER SUPPLY	12/24V AC/DC
CURRENT	100mA MAX
OUTPUTS	2X VOLT FREE RELAYS (C, NO, NC) - 1X 5A MAX 1X 1A MAX - @28V DC
INPUTS	EXIT BUTTON INPUT WITH PROGRAMMABLE DELAY
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP54
WORKING TEMP (°C MIN/MAX)	-20 - +70
DIMENSIONS UNIT (MM)	125 X 79 X 54



## VIDEX 8901 STANDALONE KEYPAD

**8901/S** or **8901/F** – Stainless steel keypads available flush or surface with rain shield. The keypads can be programmed with 3 codes (1 code per relay), with 3 relay outputs which have a switched 0V PTE input for relays 1 and 2 only.

The relays are programmable between 1-99 seconds or 00 for latching mode. Low current keypads which require a 12-24v ac/dc PSU and have blue back-lit buttons with adjustable brightness control.



### SURFACE OR FLUSH MOUNT STANDALONE KEYPAD

<b>8901/S</b>	Keypad - 3 codes - 3 relays - surface mount - back lit keypad
<b>8901/F</b>	Keypad - 3 codes - 3 relays - flush mount - back lit keypad
<b>SPARES &amp; ACCESSORIES</b>	
<b>12V-1A-PSU</b>	12v power supply with 1 amp output includes a 2.4m lead and UK plug

VIDEX 8901 KEYPAD	
ELECTRICAL DATA	
POWER SUPPLY	12/24V AC/DC
CURRENT	20mA IN STANDBY - 70mA MAX
OUTPUTS	3X VOLT FREE RELAYS (C, NO, NC) - 3A MAX @24V AC/DC
INPUTS	EXIT BUTTON INPUTS FOR RELAYS 1 & 2 ONLY, SWITCHED 0V
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	EXTERNAL USE
WORKING TEMP (°C MIN/MAX)	-10 - +60
DIMENSIONS UNIT (MM)	<b>8901/S</b> 108 X 165 X 60 - <b>8901/F</b> 103 X 160 X 48





## VIDEX MT PAD STANDALONE KEYPAD

Robust IP rated surface standalone coded keypads. The **MTPADS** keypad has a compact low-profile aluminium housing in a silver finish.

With blue back-lit key buttons and numbers for easy viewing. Additional features include 3 indication LED's behind key buttons 1 (green), 2 (red) and 3 (orange) for use during operation and programming.

Standalone coded keypads suit access control of single entrances and only require a 12/24V AC or DC power supply and a lock. They include a dry contact relay output, exit button input and memory for up to 99 codes.

### SURFACE MOUNT STANDALONE KEYPAD

MTPAD	Keypad - 1 relay - surface mount - illuminated keypad
<b>SPARES &amp; ACCESSORIES</b>	
12V-1A-PSU	12v power supply with 1 amp output includes a 2.4m lead and UK plug

VIDEX MTPADS KEYPAD	
ELECTRICAL DATA	MTPADS
POWER SUPPLY	12/24V AC/DC
CURRENT	30mA IN STANDBY / 100mA MAX OPERATIONAL
OUTPUTS	1X VOLT FREE RELAY (C, NO, NC) - 2A MAX @12VAC / 24VDC
INPUTS	EXIT BUTTON INPUTS
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP65
WORKING TEMP (°C MIN/MAX)	-20 - +50
DIMENSIONS UNIT (MM)	92 X 51 X 27



## LOCINOX SLIMSTONE2 SLIMLINE STANDALONE KEYPAD

The new **SlimStone-2** keypad contains two relays for an improved access control and advanced flexibility. It offers the possibility to command 2 different automation devices or to open the gate in 2 different ways i.e. full vehicle open or pedestrian.

This keypad with integrated led lighting is unique thanks to its strength and extreme weather resistance (IP68). In all weather conditions, access control is guaranteed.

Both integrated relays, with a Fail Open and Fail Close contact, allow an easy connection to Locinox and third-party automation products.

### SURFACE MOUNT SLIMLINE STANDALONE KEYPAD

SLIMSTONE 2 ZILV	Silver - slimline keypad - 2 relays - surface mount - back lit keypad
SLIMSTONE 2 9005	Black - slimline keypad - 2 relays - surface mount - back lit keypad
<b>SPARES &amp; ACCESSORIES</b>	
DC POWER	24v 25w Locinox PSU

LOCINOX SLIMSTONE2 KEYPAD	
ELECTRICAL DATA	SLIMSTONE2
POWER SUPPLY	10/26V AC/DC
CURRENT	1.0A WITH HEATING
OUTPUTS	2X VOLT FREE RELAYS (C, NO, NC) - 2A MAX @26V AC/DC
INPUTS	2 EXIT BUTTON INPUTS
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP68
WORKING TEMP (°C MIN/MAX)	-30 - +80
DIMENSIONS UNIT (MM)	137 X 54 X 23.8



## NICE ERA EDSW WIRELESS KEYPAD

Nice **EDSWG** Digital radio selector with FloR 52 bit coding is compatible with FloR with rolling code and generates 4 trillions of combinations, self-learning.

3 transmission channels to control 3 automated systems or 3 different customized commands for the single automated system. No cabling required, estimated range up to 25m outside, 15m indoors.



### SURFACE MOUNT STANDALONE WIRELESS KEYPAD

EDSWG

Digital wireless keypad - via radio compatible Flor 3 channel receivers - three codes

NICE EDSWG KEYPAD	
ELECTRICAL DATA	
POWER SUPPLY	3V DC WITH TYPE CR2032 batteries
BATTERY LIFE	EST 2 YEARS WITH 10 TRANSMISSIONS PER DAY
FREQUENCY	433.92 MHZ ±100 HZ
RADIO CODING	OPERA
DIMENSIONAL & GENERAL DATA	
EST RANGE (M)	100 IN OPEN SPACE, 20 INDOORS
PROTECTION LEVEL	IP54
WORKING TEMP (°C MIN/MAX)	-10 - +55
DIMENSIONS UNIT (MM)	70 X 70 X 27



## NICE ERA EDSB WIRED KEYPAD

Nice **EDSB** 12 key burglar resistant digital selectors for connection via Bluebus system for outdoor and recessed installation.



### SURFACE MOUNT WIRED KEYPAD - Power via BlueBUS

EDSB

12 key digital keypad - BlueBUS powered - burglar resistant - 3 codes

NICE EDSB KEYPAD	
ELECTRICAL DATA	
POWER SUPPLY	VIA BLUEBUS
CURRENT	1.5 BLUEBUS UITS
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP44
DIMENSIONS UNIT (MM)	70 X 70 X 27
WEIGHT (G)	200

**WE STOCK A  
FULL RANGE  
OF GATE  
AUTOMATION**

See page 7 for details



## SURFACE MOUNT STANDALONE KEYPAD WITH PROXIMITY READER

DC90SS

Standalone digital keypad - with proximity reader - vandal resistant

### SPARES & ACCESSORIES

DC90SS-TAG

SRS blue proxtag 125khz

12V-1A-PSU

12v power supply with 1 amp output includes a 2.4m lead and UK plug

## SRS DC90SS STANDALONE KEYPAD WITH BUILT-IN PROXIMITY

**DC90SS** is an upgraded version of one of our best selling keypads, the DC60SS. This modern keypad combines digital keypad and proximity reader in one unit.

The **DC90SS** been designed for stand-alone access control applications. The device is vandal resistant and weatherproof.

SRS DC90SS KEYPAD	
ELECTRICAL DATA	DC90SS
POWER SUPPLY	12/24VDC
CURRENT	62MA TO 130MA @ 12VDC - 30MA TO 61MA @ 24VDC
OUTPUTS	2x VOLT FREE RELAY (C, NO, NC), 2A MAX @24VDC
INPUTS	EXIT BUTTON INPUT WITH PROGRAMMABLE DELAY
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP65
WORKING TEMP (°C MIN/MAX)	-20 - +70
DIMENSIONS UNIT (MM)	144 X 78 X 29



## SURFACE MOUNT STANDALONE DIGITAL KEYPAD WITH PROXIMITY READER

DG500

Standalone digital keypad - with proximity reader

### SPARES & ACCESSORIES

DG500TAG

DG500 proximity tags

12V-1A-PSU

12v power supply with 1 amp output includes a 2.4m lead and UK plug

## ROLLING CENTER DG500 STANDALONE KEYPAD WITH BUILT-IN PROXIMITY

The **DG500** standalone keypad has a built-in proximity reader, enabling entry via PIN-codes or cards/fobs. Up to 500 users can be enrolled and assigned to two programmable output relays.

The **DG500** robust metal casing gives a high degree of vandal resistance, and includes a tamper sensor. Variable open time and latching option. Ideal for offices, shops, clubs, etc.

DG500 KEYPAD	
ELECTRICAL DATA	DG500
POWER SUPPLY	12VDC
CURRENT	130MA @ 12V
RELAYS	2X VOLT FREE RELAYS (C, NO, NC) 2A MAX
DIMENSIONAL & GENERAL DATA	
PROXIMITY	EM FORMAT - 26 BIT / 125KHZ
DIMENSIONS UNIT (MM)	120 X 76 X 27



## VIDEX MIACCESS EXTERNAL PROXIMITY READER

The **MTPX-MF-SA** can be programmed with built-in micro-USB function or desktop card enrollment, depending on the version. Events can be downloaded onto master **MIFARE** cards which also could be used to activate and program additional readers on site.



### EXTERNAL PROXIMITY READER

<b>MTPXBK-MF-SA</b>	Black MiAccess surface mount proximity reader
<b>SPARES &amp; ACCESSORIES</b>	
<b>PROX USB</b>	Desk programming prox reader
<b>HDR15-12</b>	12vdc 1.25a DIN rail mount power supply unit
<b>PBX-1E-MS50</b>	Grey - MiFare proximity fob - 1k memory
<b>PBX-2-MS70</b>	MiFare proximity card - 4k memory
<b>MTPXBK-MF-SA PROXIMITY READER</b>	
<b>ELECTRICAL DATA</b>	
POWER SUPPLY	12VDC
CURRENT	150mA MAX
OUTPUTS	BUILT-IN VOLT FREE RELAYS (C, NO, NC) 2A MAX @24V
INPUTS	1X EXIT BUTTON INPUT
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
OPERATING FREQUENCY (MHZ)	13.56
PROTECTION LEVEL	IP65
WORKING TEMP (°C MIN/MAX)	-20 - +50
DIMENSIONS UNIT (MM)	92 X 51 X 27



## VIDEX MINI SA2 STANDALONE PROXIMITY READER

**Mini SA2** – 4000 capacity low profile reader finished in matt black ABS plastic. Three LED's offer visual indication of operation while the internal sounder gives audible feedback. Programming is carried out using shadow and delete cards without the need for a PC or software components.



### STANDALONE PROXIMITY READER

<b>MINI-SA2</b>	Standalone proximity reader - EM4002 - 125khz
<b>SPARES &amp; ACCESSORIES</b>	
<b>955/T</b>	EM4002 - 125KHZ - proximity tag
<b>955/C</b>	EM4002 - 125KHZ - proximity card
<b>HDR15-12</b>	12V power supply
<b>MINI SA2 STANDALONE PROXIMITY READER</b>	
<b>ELECTRICAL DATA</b>	
POWER SUPPLY	2/14VDC OR 15/24VAC
CURRENT	60mA (12VDC) OR 40mA (24VDC)
OUTPUTS	1X VOLT FREE RELAY (C, NO, NC) 1A @30VDC - 0.5A @125VAC
INPUTS	1X PUSH TO EXIT INPUT
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
OPERATING FREQUENCY (KHZ)	125
PROTECTION LEVEL	IP66
WORKING TEMP (°C MIN/MAX)	-20 - +50
DIMENSIONS UNIT (MM)	90 X 51 X 17

**WE STOCK A WIDE  
RANGE OF AUDIO,  
VIDEO, GSM &  
WIRELESS  
INTERCOMS**

See page **111** for details



NEW



## ROLLING CENTER DIGIGATE GSM DIALLER UNIT

**DigiGate** is a small device that easily connects to your electric gates and enables you to control them via mobile app, GSM (call to open) and the web.

DigiGate works seamlessly alongside all other gate controls you may have such as keypads, fobs etc.

### DIGI GATE GSM UNIT

#### DIGIGATE

Connects to your electric gates, to control them via the mobile app, web, and GSM 'dial to open'.

#### SPARES & ACCESSORIES

DIGIGATE UNIT	DigiGate main unit
POWER SUPPLY	5v 2a PSU
ETHERNET CABLE	Ethernet network cable
SWITCHCABLE	DigiGate switch cables
WIFIADAPTOR	WIFI wireless adapter
GSM DONGLE	USB GSM dial to open module



**WE STOCK A  
FULL RANGE  
OF GATE  
AUTOMATION**

See page **7** for details

**ROLLING CENTER  
WHATSAPP  
TECHNICAL**

Scan  
the  
QR  
code  
for  
instant  
help



DIGIGATE GSM DIALLER	
DIGIGATE	
<b>ELECTRICAL DATA</b>	
POWER SUPPLY	5V 2A VIA ADAPTOR
OUTPUT GATE SYSTEM	1X
OUTPUT SINGLE GARAGE	1X
OUTPUT SINGLE GARAGE	WITH SEPARATE OPEN & CLOSE BUTTONS - 2X
OUTPUT DOUBLE GARAGE	2X
INPUTS	4X USB - 1X ETHERNET - 1X POWER
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
WEIGHT (G)	180
DIMENSIONS UNIT (MM)	150 X 70 X 33



## GMT GMT2G-SRF GSM SWITCH

The GMT-2GS GSM switch with RF key fob is a professional, industrial grade product that can receive calls just like any ordinary mobile phone but allows you to operate your gates remotely.

The advantages of this GSM remote switch over other systems is that you do not have to leave the car to open gates, barriers or rising bollards thus avoiding adverse weather conditions or anything that could cause concern over safety issues.



### 2G GSM DIALLER

GMT2G-SRF	GSM dial to open - store up to 60 caller id's
<b>SPARES &amp; ACCESSORIES</b>	
12V-1A-PSU	12v power supply with 1 amp output includes a 2.4m lead and UK plug

GSM DIALLER	
ELECTRICAL DATA	
POWER SUPPLY	12/24VDC
OUTPUTS	1X VOLT FREE RELAY (NO)
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP 65
CALLED ID'S	60
DIMENSIONS (MM)	150 X 90 X 45



## PRIORY GSMDIALLER4G GSM SWITCH

The 4G GSM Gate Opener is a general-purpose SMS and call-controlled switch. The gate opener can be used to operate an electric gate controller when dialled from a recognised number. If desired, the gate opener can be set to open when any number dials its telephone number.

NEW



### 4G & 3G GSM DIALLER

GSMDIALLER4G	12-24vdc - GSM dialler unit - card type
GSMDIALLER4G/ENC	12-24vdc - GSM dialler unit card type with enclosure - external mount
<b>SPARES &amp; ACCESSORIES</b>	
12V-1A-PSU	12v power supply with 1 amp output includes a 2.4m lead and UK plug



GSM DIALLER	
GSM DIALLER 4G	
POWER SUPPLY	12/24VDC
CURRENT	200MA MAX
OUTPUTS	1X VOLT FREE RELAY (C, NO, NC) - 1X OPEN COLLECTOR TRANSISTOR OUTPUT
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP 65 (ENCLOSURE)
CALLED ID'S	1000



## AES I-GATE PRIME GSM SWITCH

This GSM dial to open device can be used for controlling access of gates, doors or barriers. The unit can store up to 250 numbers and any of these numbers can call the unit which then activates and output relay to open a gate or a barrier.

This device is ideal for small to medium size buildings with gate or barrier entrance.

Programming the unit is done by SMS text message; with options to check the reception add numbers for access and add a service number.

This device comes with an App which is compatible with both Apple and Android devices and can be downloaded from your App store, simply search GSM-Gate.

### GSM DIALER

<b>I-GATE PRIME</b>	GSM dial to open - store up to 250 caller id's - activity log & time clock
<b>SPARES &amp; ACCESSORIES</b>	
<b>12V-1A-PSU</b>	12v power supply with 1 amp output includes a 2.4m lead and UK plug

<b>GSM DIALER</b>	
<b>ELECTRICAL DATA</b>	
POWER SUPPLY	12-24V AC/DC
CURRENT	200MA MAX
OUTPUTS	1X RELAY (C, NO, NC) LATCHING & MOMENTARY) - 1X VOLT FREE REPLAYS (C, NO, NC) 1A MAX @24VAC
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
FEATURES	ACTIVITY LOG - 7 DAY CLOCK - AUTO CALL FEATURE (PREVENTS SIM BEING DEACTIVATED)
PROTECTION LEVEL	IP 67
CALLED ID'S	250
DIMENSIONS (MM)	110 X160 X 54



## AES I-GATE 1200 GSM SWITCH

This GSM device can be used for controlling access of gates, doors or barriers. The unit can store up to 1200 numbers and any of these numbers can call the unit which then activates and output relay to open a gate or a barrier.

This device is ideal for small to medium size buildings with gate or barrier entrance.

Programming the unit is done by SMS text message; with options to check the reception add numbers for access and add a service number.

This device comes with an App which is compatible with both Apple and Android devices and can be downloaded from your App store, simply search GSM-Gate.

### GSM DIALER

<b>I-GATE 1200</b>	GSM dial to open - store up to 1200 caller id's
<b>SPARES &amp; ACCESSORIES</b>	
<b>12V-1A-PSU</b>	12v power supply with 1 amp output includes a 2.4m lead and UK plug

<b>GSM DIALER</b>	
<b>ELECTRICAL DATA</b>	
POWER SUPPLY	12-24V AC/DC
CURRENT	200MA MAX
OUTPUTS	1X RELAY (C, NO, NC) LATCHING & MOMENTARY) - 1A MAX @24VAC
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
FEATURES	AUTO CALL FEATURE (PREVENTS SIM BEING DEACTIVATED)
PROTECTION LEVEL	IP 67
CALLED ID'S	1200
DIMENSIONS (MM)	110 X160 X 54





## PAL SG30-4 3G / 4G GSM SMART DEVICE

4G network system that opens automatic gates, garage doors, electric locks and barriers via an application and an Internet interface.



### GSM SMART DEVICE - APP / WEB BASED USER INTEGRATION

SG304GI-L	12-24vdc - 1x relay output C, NO 60v/0.9a - 1x input - 3/4G - 50 app users
SG304GB	12-24vdc - 2x relay output C, NO 60v/0.9a - 3/4G - unlimited app users
SG304GI	12-24vdc - 1x relay output C, NO 60v/0.9a - 1x input - 3/4G - unlimited app users



## PAL SG30-4-WR 3G / 4G GSM SMART DEVICE & RECEIVER

4G network system that opens automatic gates, garage doors, electric locks and barriers via an application and an Internet interface.



### GSM SMART DEVICE & RECEIVER - APP / WEB BASED USER INTEGRATION

SG304GIL-WR	12-24vdc - 1x relay output C, NO 60v/0.9a - 1x input - - 3/4G - with receiver - 3 app users
SG304GB-WR	12-24vdc - 2x relay output C, NO 60v/0.9a - 3/4G - with receiver - unlimited app users
SG304GI-WR	12-24vdc - 1x relay output C, NO 60v/0.9a - 1x input - - 3/4G - with receiver - unlimited app users
SG314GI-WR	12-24vdc - 1x relay output C, NO 60v/0.9a - 1x input - - 3/4G - with receiver - unlimited app users can be used with any WIEGAND 26bit readers / proximity



### THE APP FEATURES

- Add/delete users from the app/web interface
- Unlimited users without subscription
- Control from anywhere in the world
- Online logs, alerts be Email, SMS, API
- 



DOWNLOAD NOW  
"Palgate"







NEW



## PAL SG33-3GA 3G / 4G RFID LONG RANGE SYSTEM

Easy installation. System control and management with simple web interface. Unlimited authorized users (stickers) Groups for access control by time, days and dates. Records at least 10000 tag numbers in an internal log. Support all 3G/4G Networks. 1 optical solid state relay output. 3 Indication LED's.

### 3G / 4G RFID LONG RANGE READER SYSTEM

SG33-3GA	12vdc - RFID management systems - RFID antenna - RFID assembly
<b>SPARES &amp; ACCESSORIES</b>	
SG33-40A-I	12vdc - RFID management system
ANT1007	RFID antenna
CO1009	RFID assembly
BS011	UHF windshield RFID sticker tag



NEW



## PAL VD909-433 433MHZ WIRELESS VEHICLE DETECTOR


**VD 900-433** series, a new wireless compact Vehicle Detector. This innovative detector is Plug and play, all-in-one device that operates at 433MHz, an ideal solution for vehicle detecting in a commercial environment. Includes a web interface that makes it easy to install and use.

### 433MHZ WIRELESS VEHICLE DETECTOR

VD909-433	3.6vdc battery powered - 433mhz ISM band - holds approx 1000kg
<b>SPARES &amp; ACCESSORIES</b>	
SG304GIL-WR	12-24vdc - 1x relay output C, NO 60w/0.9a - 1x input - - 3/4G - with receiver - 3 app users
SG304GB-WR	12-24vdc - 2x relay output C, NO 60w/0.9a - 3/4G - with receiver - unlimited app users
SG304GI-WR	12-24vdc - 1x relay output C, NO 60w/0.9a - 1x input - - 3/4G - with receiver - unlimited app users
SG314GI-WR	12-24vdc - 1x relay output C, NO 60w/0.9a - 1x input - - 3/4G - with receiver - unlimited app users

## FEATURES:

- USER FRIENDLY ONLINE WEB INTERFACE
- LIVE LOGS
- ALERTS BY EMAIL, SMS AND API
- HISTORY LOGS
- IMPORT/EXPORT EXCEL FILES
- STATISTICS
- FULL CONTROL FROM ANYWHERE VIA WEB OR SMARTPHONE
- MULTIPLE LANGUAGES

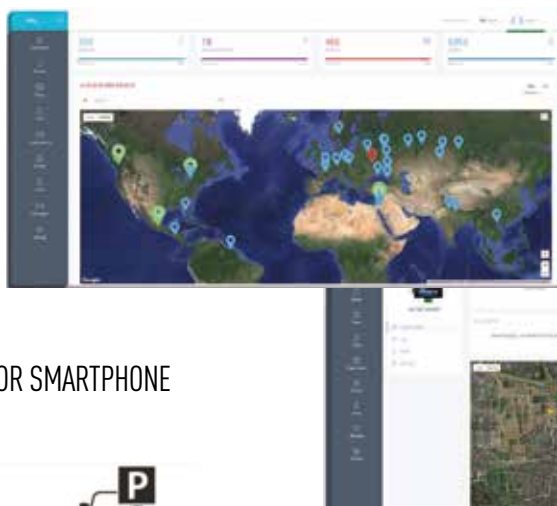

**CONTACT US NOW  
FOR TRAINING  
COURSES ON THIS  
RANGE**

Call us on  
**0113 201 6677** our friendly  
team are here to help.





Lined area for installer notes, consisting of multiple horizontal dashed lines.



## CDVI TH SERIES TIMER / TIME CLOCKS

The **TH** Series of timers provide various weekly and daily programmes to control the automatic release of locks for "free access" periods. Easy to programme, with LCD digital displays to give visual feedback, these timers allow up to 8 on/off schedules to be applied daily or weekly - in fact there are pre-set groups of days to assist in the set up of the programming.

The timers operate automatically but also include a manual override. They include an NCID battery back up for timing and are available in different voltages.

### 7 DAY DIGITAL TIME CLOCKS

TH827-12	7 day digital timer, 12V ac/dc
TH827-24	7 day digital timer, 24V ac/dc
TH827-240	7 day digital timer, 240Vac

TH SERIES TIME CLOCKS	
TH827-12 / TH827-24 / TH827-240	
<b>ELECTRICAL DATA</b>	
POWER SUPPLY TH827-12	12V AC/DC
POWER SUPPLY TH827-24	24V ACDC
POWER SUPPLY TH827-240	240VAC
SWITCHING	8A @240V
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
ON/OFF	8 PER DAY
BATTERY BACKUP	200 HOURS
DIMENSIONS (MM)	60 X 60 X 34



## VEMER VE SERIES TIMER / TIME CLOCK

This programmable timer includes automatic British Summer time/ Greenwich mean time adjustment which means once the timer has been programmed, the clock will automatically adjust each Spring and Autumn when the clocks change. Programmable time clock. Manual over-ride of the relay can be password protected. 3 Year Battery Life DIN rail mountable.

The time clock is DIN mounting, has a digital display and can be password protected to prevent unauthorised tampering.

### DIN RAIL MOUNTABLE 365 DAY PROGRAMMABLE TIME CLOCK

VE463600	365 day + bank holidays with BST - din rail mount - 24v ac/dc
VE462800	365 day + bank holidays with BST - din rail mount - 12v ac/dc

VEMER VE463600 TIME CLOCK	
<b>ELECTRICAL DATA</b>	<b>VE463600</b>
POWER SUPPLY	230VAC $\pm$ 10%
CURRENT	8VA (2W)
OUTPUT	MONOSTABLE CHANGE-OVER 16(10)A / 250VAC
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
PROTECTION	IP20 (TERMINALS)
OPERATING TEMP (°C MIN/MAX)	0 - +50
DIMENSIONS (MM)	87 X 65 X 35



## BELL TS2000 TIMER / TIME CLOCK

Making it simple to adjust to British and European time settings, the **TS2000** time clock is simple to program and will adjust itself automatically. Used in conjunction with access control systems, this time clock is a reliable choice and popular with many installers.

Model **TS2000** time clock is manufactured by Bell System (BSTL) and is a necessary component for most Bell entrance panels with the Tradesman facility.



### 7 DAY DIGITAL TIME CLOCKS WITH AUTOMATIC BST

TS2000-BST

7 day with automatic BST - surface mount - 12v ac/dc

TS2000BST TIME CLOCK	
ELECTRICAL DATA	
POWER SUPPLY	12V AC/DC
SWITCHING CAPACITY	10A 30VDC
OUTPUT	MONOSTABLE CHANGE-OVER 16(10)A / 250VAC
DIMENSIONAL & GENERAL DATA	
BST	AUTOMATIC EUROPEAN TIME ADJUSTMENT
PROGRAMMING	7 DAY
ON/OFF	8 PER DAY
DIMENSIONS (MM)	98 X 66 X 40



## ROLLING CENTER VHLR RELAY UNIT

An exceptionally versatile version of the handy little relay which operates on AC voltages ranging from 6 to 28V and will also work on DC voltages from 6 to 28V. It is mounted on a PCB that has screw terminals for easy interconnections. Voltage selection is made by cutting a link on the PCB.



### VHLR DOUBLE POLE RELAY UNIT

VHLR

12-28v ac/dc - double pole - relay unit

VHLR RELAY UNIT	
ELECTRICAL DATA	
POWER SUPPLY	8-30VAC OR 11-30VDC - 45MA @12V
RELAYS	DOUBLE POLE CHANGE-OVER CONTACT
OUTPUT	2x VOLT FREE RELAYS (C, NO, NC) 5A @240VAC - 5A @30VDC
DIMENSIONAL & GENERAL DATA	
DIMENSIONS (MM)	69 X 59 X 30

### NEED MAGNETIC LOCKS?

See page **158** for details



NEW



## MAGNETIC PROBE LOOP DETECTOR

**MD102C**

Magnetic probe controller unit - 12/24v ac/dc

### SPARES & ACCESSORIES

**MD102-10**

10m magnetic probe loop detector cable and probe

**MD102-15**

15m magnetic probe loop detector cable and probe

**MD102-30**

30m magnetic probe loop detector cable and probe

## PROCON MD102 SERIES MAGNETIC PROBE LOOP DETECTOR


The probe can measure the magnetic field in 3 axis, namely the X, Y, and Z axis. Each axis can be individually enabled to optimise vehicle detection. Normally all 3 axis would be enabled.

The **MD102** probe can be buried in the road surface underneath the vehicle, alongside the vehicle or can be mounted above the ground next to the passage of the vehicle. The probe can be used to produce a pulse output or a presence out. The presence out will detect the vehicle indefinitely.

The **MD102C** is a control unit which enables configuration and testing of the **MD102**. DIP switches are used for configuration and LED's are used for visual indications of the operation of the probe. A relay output switches ON when a vehicle is detected.

The **MD102** has been designed for parking and access control applications and is a cost-effective solution for detecting vehicles in order to facilitate the automatic opening of security gates. It requires a minimal amount of cutting in the road surface.

### TECHNICAL INFO:

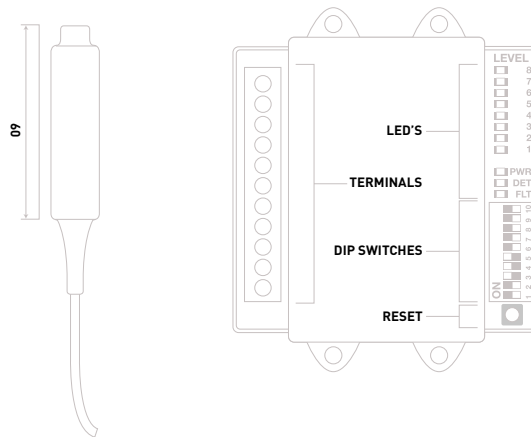

#### MD102C SERIES CONTROLLER

ELECTRICAL DATA		MD102C
POWER SUPPLY		12/24V AC/DC
CURRENT		30mA
DIMENSIONAL & GENERAL DATA		
PRESENCE/PULSE RELAY		CHANGE OVER CONTACT 0.5A/230VAC
RESPONSE TIME		APPROXIMATELY 100MS AFTER VEHICLE ENTERS PROBE AREA.
INDICATORS		LED INDICATORS SHOW: POWER, DETECT STATE AND PROBE FAULT.
CONNECTOR		11 WAY SCREW TERMINAL BLOCK.
OPERATING TEMP (°C MIN/MAX)		-20 - +70
DIMENSIONS (MM)		105 X 90 X 22

#### MD102C SERIES CONTROLLER

ELECTRICAL DATA		MD102C
POWER SUPPLY		12/24V AC/DC
CURRENT		30mA
DIMENSIONAL & GENERAL DATA		
PRESENCE/PULSE RELAY		CHANGE OVER CONTACT 0.5A/230VAC
RESPONSE TIME		APPROXIMATELY 100MS AFTER VEHICLE ENTERS PROBE AREA.
INDICATORS		LED INDICATORS SHOW: POWER, DETECT STATE AND PROBE FAULT.
CONNECTOR		11 WAY SCREW TERMINAL BLOCK.
OPERATING TEMP (°C MIN/MAX)		-20 - +70
DIMENSIONS (MM)		105 X 90 X 22

**NEED ASSISTANCE  
WITH CHOOSING  
THE RIGHT KIT?**

Call us on  
**0113 201 6677** our friendly  
team are here to help.

**NICE & CAME  
BARRIER KITS.**



Turn to page **50**



## PROCON LD SINGLE CHANNEL BOXED TYPE LOOP DETECTOR & RELAY BASE

The **LD100 & LD102** are both single channel inductive loop detectors

The use of microprocessor and surface mount technology enables a large number of functions to be incorporated into a small package. The **LD100 & LD102** is compatible with most single channel detectors on the market and is easy to set-up and install.

Typical applications in the parking and access control environments are safety loops, arming loops and entry or exit loops.



### SINGLE CHANNEL BOXED LOOP DETECTOR AND RELAY BASE

LD100	230v - single channel - boxed loop detector - with relay base
LD102	24vdc - single channel - boxed loop detector - with relay base

#### SPARES & ACCESSORIES

LC100	100m induction ground loop cable
LC500	500m induction ground loop cable
RELAY BASE	11 pin relay base

LD SINGLE CHANNEL LOOP DETECTORS		
ELECTRICAL DATA	LD 100	LD 102
POWER SUPPLY	200-260V 1.5VA	11-26V AC/DC 95MA MAX
PRESENCE RELAY	CHANGE OVER CONTACT 0.5A / 230VAC (FAIL SAFE – NORMALLY ENERGIZED)	
PULSE RELAY	CHANGE OVER CONTACT 0.5A / 230VAC (NON FAIL SAFE – NORMALLY DE-ENERGISED)	
DIMENSIONAL & GENERAL DATA		
LOOP FREQ & POWER FAIL MEMORY	APPROX 23-130KHZ - 20 SECONDS MEMORY	
OPERATING TEMP (°C MIN.MAX)	-40 - +80	
DIMENSIONS UNIT (MM)	80 X 40 X 79 + 11 PIN RELAY BASE	



## PROCON LD DUAL CHANNEL BOXED TYPE LOOP DETECTOR & RELAY BASE

The **LD200 & LD201** are both dual channel inductive loop detectors.

The use of microprocessor and surface mount technology enables a large number of functions to be incorporated into a small package. The **LD200 & LD201** is compatible with most dual channel detectors on the market and is easy to set-up and install.

Typical applications in the parking and access control environments are safety loops, arming loops and entry or exit loops as well as direction logic.



### DUAL CHANNEL BOXED LOOP DETECTOR AND RELAY BASE

LD200	230v - dual channel - boxed loop detector - with relay base
LD201	24vdc - dual channel - boxed loop detector - with relay base

#### SPARES & ACCESSORIES

LC100	100m induction ground loop cable
LC500	500m induction ground loop cable
RELAY BASE	11 pin relay base for boxed loop detectors

LD DUAL CHANNEL LOOP DETECTORS		
ELECTRICAL DATA	LD 200	LD 201
POWER SUPPLY	200-260V 1.5VA	11-26V AC/DC 95MA MAX
PRESENCE RELAY	CHANGE OVER CONTACT 0.5A / 230VAC (FAIL SAFE – NORMALLY ENERGIZED)	
PULSE RELAY	CHANGE OVER CONTACT 0.5A / 230VAC (NON FAIL SAFE – NORMALLY DE-ENERGISED)	
DIMENSIONAL & GENERAL DATA		
LOOP FREQ & POWER FAIL MEMORY	APPROX 23-130KHZ - 20 SECONDS MEMORY	
OPERATING TEMP (°C MIN.MAX)	-40 - +80	
DIMENSIONS UNIT (MM)	80 X 40 X 79 + 11 PIN RELAY BASE	



## PROCON LD SINGLE & DUAL CHANNEL CARD TYPE LOOP DETECTOR

The **LD113** single channel & **LD213** dual channel inductive loop detectors

The use of microprocessor based technology enables a large number of functions to be incorporated into a small package.

The **LD113 & LD213** is a single printed circuit board construction and is compatible with other similar single channel detectors. Special features include a switched mode power supply to enable operation over a wide voltage range.

Typical applications in the parking and access control environments are safety loops, arming loops and entry or exit loops.

### SINGLE & DUAL CHANNEL CARD TYPE LOOP DETECTOR

LD113	12-24v ac/dc- single channel - card type loop detector
LD213	12-24v ac/dc- dual channel - card type loop detector
<b>SPARES &amp; ACCESSORIES</b>	
LC100	100m induction ground loop cable
LC500	500m induction ground loop cable

#### LD DUAL CHANNEL CARD TYPE LOOP DETECTORS

ELECTRICAL DATA	LD 113 SINGLE CHANNEL	LD 213 DUAL CHANNEL
POWER SUPPLY	11-26V AC/DC 100MA MAX	11-26V AC/DC 100MA MAX
PRESENCE RELAY	CHANGE OVER CONTACT 0.5A / 230VAC (FAIL SAFE – NORMALLY ENERGIZED)	
PULSE RELAY	CHANGE OVER CONTACT 0.5A / 230VAC (NON FAIL SAFE – NORMALLY DE-ENERGISED)	
DIMENSIONAL & GENERAL DATA		
LOOP FREQ & POWER FAIL MEMORY	APPROX 23-130KHZ - 20 SECONDS MEMORY	
CONNECTOR	LD113-1 10 WAY MOLEX PLUG CONNECTOR	LD113-2 10 WAY SCREW TERMINAL BLOCK
OPERATING TEMP (°C MIN.MAX)	-40 - +80	
DIMENSIONS UNIT (MM)	105 X 68	

# CANTILEVER GATE CONFIGURATOR TOOL AVAILABLE NOW



## ONLY ON OUR WEBSITE





CDVI  
RTE-SS  
PUSH TO EXIT BUTTONS  
SURFACE & FLUSH MOUNT

The **RTE-SS** series of exit switches offer a flexible solution to provide exit triggering in a variety of applications. From medium to heavy traffic use, these push buttons are suitable for internal and external use.



In consultation with the installers, we have adopted **"PRESS TO EXIT"** as the standard wording on the switches - this was requested to replace **"DOOR RELEASE"**, as some switches are used to control gates and barriers.

The exit button options are standard stainless steel or high impact green dome. The green dome is particularly suited for users who require a larger "target" button - in homes for the elderly, for example.



STAINLESS STEEL PUSH TO EXIT BUTTONS

RTE-SS-SS	Surface mount - stainless steel exit button
RTE-SS-SF	Flush mount - stainless steel exit button



CDVI  
RTE-SSD  
DOMED PUSH TO EXIT  
BUTTONS SURFACE & FLUSH MOUNT

The **RTE-SSD** series of exit switches offer a flexible solution to provide exit triggering in a variety of applications. From medium to heavy traffic use, these push buttons are suitable for internal and external use.



In consultation with the installers, we have adopted **"PRESS TO EXIT"** as the standard wording on the switches - this was requested to replace **"DOOR RELEASE"**, as some switches are used to control gates and barriers.

The exit button options are standard stainless steel or high impact green dome. The green dome is particularly suited for users who require a larger "target" button - in homes for the elderly, for example.



STAINLESS STEEL DOMED PUSH TO EXIT BUTTONS

RTE-SS-SSD	Surface mount - standard green domed exit button
RTE-SS-SFD	Flush mount - standard green domed exit button







NEW



## SRS TF-SQUARE SQUARE TOUCH FREE EXIT BUTTON

This is a square stainless steel exit device with touch free button.

It is laser engraved 'exit' and can be surface or flush mounted with the green back box provided.

The blue LED colour indicates standby mode, whereas the green LED colour indicates that the exit button has been activated.

### TOUCH FREE EXIT BUTTONS

TF-SQUARE	12-24vdc - touch free - square - exit button
<b>SPARES &amp; ACCESSORIES</b>	
12V-1A-PSU	12v power supply with 1 amp output includes a 2.4m lead and UK plug

TF NARROW EXIT BUTTON	
ELECTRICAL DATA	TF NARROW
POWER SUPPLY	12-24VDC
OUTPUT CONTACT	NO / NC / COM
DIMENSIONAL & GENERAL DATA	
PROTECTION	IP68
SENSITIVE DISTANCE	ADJUSTABLE 3-15CM
TIME DELAY	ADJUSTABLE 0-30S
OPERATING TEMP (°C MIN.MAX)	-20 - +55
DIMENSIONS UNIT (MM)	32 X 32 X 80



NEW



## SRS TF-NARROW NARROW TOUCH FREE EXIT BUTTON

This is a narrow, architrave style touch free button with adjustable time delay and IR sensor.

It's slim design and an IP68 rating makes this device an ideal choice for both, general and harsh conditions installations.

The built in LED has a dual mode operation, with a blue colour indicating standby and the green, access granted.

### TOUCH FREE NARROW EXIT BUTTONS

TF-NARROW	12-24vdc - touch free - narrow - exit button
<b>SPARES &amp; ACCESSORIES</b>	
12V-1A-PSU	12v power supply with 1 amp output includes a 2.4m lead and UK plug

TF SQUARE EXIT BUTTON	
ELECTRICAL DATA	TF SQUARE
POWER SUPPLY	12-24VDC
CONTACT RATING	12-24V 3A
OUTPUT CONTACT	NO / NC / COM
DIMENSIONAL & GENERAL DATA	
SENSITIVE DISTANCE	NON-ADJUSTABLE
TIME DELAY	ADJUSTABLE 0-30S
OPERATING TEMP (°C MIN.MAX)	-20 - +55
DIMENSIONS UNIT (MM)	25 X 86 X 86

**NICE  
EKSEU  
SPRING LOADED  
KEY SWITCH**

**EKSEU** key switch, surface mounting contains the European standard cylinder.

With the key switch, the door can be easily opened or closed by a key.

**SPRING LOADED KEY SWITCH****EKSU**

Key switch - surface mount - euro-cylinder - external use

**CDVI  
KEY-SSMAKA  
2 POSITION KEY SWITCH**

CDVI's range of key switches offers 2 or 3 position key switches mounted on a stainless steel plate, and available as flush or surface.

The KEY-S Series are standard 2 position key switches available as keyed alike or keyed to differ to suit any need.

**STAINLESS STEEL 2 POSITION KEY SWITCH****KEY-SSMAKA**

Key switch - surface mount - 2 position - keyed alike - external use

**WE ARE DISTRIBUTORS OF VIDEX PRODUCTS****DID YOU KNOW?**

WHETHER YOU REQUIRE FULL BESPOKE SYSTEMS FOR APARTMENTS OR REPLACEMENT SPARES, WE CAN SUPPLY THE WHOLE RANGE AT VERY COMPETITIVE PRICES

**PLEASE CONTACT US WITH YOUR REQUIREMENTS - 0113 201 6677**





NEW



## HAYDON 12V 1A IN-LINE DC POWER SUPPLY UNIT

### ENCAPSULATED IN-LINE DC POWER SUPPLY UNIT

12V-1A-PSU

12v power supply with 1 amp output includes a 2.4m lead and UK plug

INLINE DC POWER SUPPLY UNITS	
12V 1A	
ELECTRICAL DATA	
INPUT VOLTAGE	100 - 240VAC
INRUSH CURRENT	< 20A @ 240VAC
INPUT CURRENT	3A MAX
RATED OUTPUT POWER	12 WATTS
OUTPUT CURRENT	1A
ISOLATION	AC3.0 KV/1 MIN (INPUT / OUTPUT)
DIMENSIONAL & GENERAL DATA	
WORKING TEMP (°C MIN/MAX)	0 - +50
DIMENSIONS UNIT (MM)	77.5 X 46 X 28



NEW



## HAYDON 24V 2A IN-LINE DC POWER SUPPLY UNIT

### BOXED EXTERNAL DC POWER SUPPLY UNIT

24V-2A-PSU

24vdc 2A inline power supply with input/output leads, input 230vac

INLINE DC POWER SUPPLY UNITS	
24V 2A	
ELECTRICAL DATA	
INPUT VOLTAGE	240VAC
RATED OUTPUT POWER	48VA
OUTPUT CURRENT	2A
ISOLATION CLASS	B (130°C)
DIMENSIONAL & GENERAL DATA	
WORKING TEMP (°C MIN/MAX)	-10 - +40
DIMENSIONS UNIT (MM)	105 X 92.5 X 65

## PAL SMART GSM DEVICE



Turn to page 92



**HAYDON**  
**12V 2A**  
EXTERNAL DC POWER  
SUPPLY



**STAINLESS STEEL PUSH TO EXIT BUTTONS**

12V-2A-PSU

12vdc 2a - external IP66 power supply with input/output leads - input 230vac.

EXTERNAL DC POWER SUPPLY UNITS	
12V 2A	
ELECTRICAL DATA	
INPUT VOLTAGE	100-240VAC 3A
OUTPUT CURRENT	1X 2A
OUTPUT VOLTAGE	12 VDC
SURGE PROTECTED	YES
DIMENSIONAL & GENERAL DATA	
PROTECTION	IP44
WORKING TEMP (°C MIN/MAX)	-10 - +40
DIMENSIONS UNIT (MM)	8 X 15 X 7.1



**CDVI**  
**CA1R**  
CLASS II AC DIN RAIL  
MOUNT POWER SUPPLY UNIT

A range of high quality power supplies from CDVI to complement your access control and locking requirements.

The **CA1R** is an economical power supply with 2 x 12V outputs with "mid-point", which means it can deliver **12Vac** or **24Vac**.

This unit is ideal for running a simple keypad and electric strike.



**DIN RAIL MOUNT AC POWER SUPPLY UNIT**

CA1R

12-24vac power supply unit - din rail mount - class II

CA1R AC POWER SUPPLY UNIT	
CA1R	
ELECTRICAL DATA	
INPUT VOLTAGE	230V AC $\pm 10\%$
OUTPUT VOLTAGES	12VAC OR 24VAC
SECONDARY OUTPUT	24V - 2X 12V WITH MIDPOINT
DIMENSIONAL & GENERAL DATA	
DIMENSIONS UNIT (MM)	90 X 55 X 65



**VIDEX  
HDR15**  
DC DIN RAIL MOUNT  
POWER SUPPLY UNIT

**DIN RAIL MOUNT DC POWER SUPPLY UNIT**

HDR 15-12	12vdc 1.25a power supply unit - din rail mount
HDR 15-24	24vdc 0.63a power supply unit - din rail mount

INLINE DC POWER SUPPLY UNITS			
ELECTRICAL DATA		HDR 15-12	HDR 15-24
INPUT VOLTAGE		85-265VAC	
RATED OUTPUT POWER		15 WATTS	15.2 WATTS
OUTPUT VOLTAGE		12V DC	24V DC
OUTPUT CURRENT		1.25A	0.63A
DIMENSIONAL & GENERAL DATA			
WORKING TEMP (°C MIN/MAX)		-30 - +70	-30 - +70
DIMENSIONS UNIT (MM)		77.5 X 46 X 28	108 X 48 X 30



**ROLLING CENTER  
ROTARY ISOLATOR**

**ROTARY ISOLATOR**

ROTARY ISOLATOR	20a rotary isolator - IP65 - EN60947 compliant
-----------------	--



**CDVI  
ES BUTTON**  
EMERGENCY STOP BUTTON

**EMERGENCY STOP BUTTON TWIST RELEASE**

ESBUTTON	Emergency stop button - twist to release - normally closed contact
----------	--




ROLLING CENTER  
LOOPCABLE  
INDUCTION LOOP CABLE



INDUCTION LOOP CABLE

LC100	Induction loop cable - 1mm <sup>2</sup> - 100m drum
LC500	Induction loop cable - 1mm <sup>2</sup> - 500m drum

ROLLING CENTER  
3 CORE ARMoured  
CABLE



ARMoured 3 CORE

3COREARM	3 core armoured - 1.5mmØ - 50m drum
----------	-------------------------------------

ROLLING CENTER  
5 CORE FLEX CABLE



FLEX CABLE

5CORE FLEX	5 core flex - 0.75mmØ - 50m drum
------------	----------------------------------

WE HAVE A FULL  
RANGE OF  
INTERCOMS  
AVAILABLE AT  
COMPETITIVE  
PRICES

If you don't see what you're  
looking for call us on  
0113 201 6677 or email  
Info@rollingcenter.co.uk



## ROLLING CENTER SECURITY CABLE

### SECURITY CABLE

6CORE BLACK	6 core security cable - black - 100m drum
6CORE WHITE	6 core security cable - white - 100m drum
8CORE BLACK	8 core security cable - black - 100m drum
8CORE WHITE	8 core security cable - white - 100m drum



## ROLLING CENTER DATA CABLE

### CAT5 DATA CABLE

CAT5E UTP	CAT5 UTP - data cable - sold per meter or box
CAT5E UTP	CAT5 UTP - data cable - sold per 305 meter box



## ROLLING CENTER ENC ABS ENCLOSURES

### ABS ENCLOSURE BOXES

ENC431	ABS enclosure box - 400 x 300 x 195mm - with key - with backplate
ENC541	ABS enclosure box - 500 x 400 x 175mm - with key - with backplate
ENC642	ABS enclosure box - 600 x 400 x 275mm - with key - with backplate

**CLICK & COLLECT  
START SAVING  
TODAY**

- REGISTER ONLINE  
- PLACE AN ORDER  
- COLLECT

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)



**ROLLING CENTER  
CPPR COPEX**  
PLASTIC CONDUIT & FIXINGS



**COPEX**

CPPR20	Contractor pack - 10m of 20mm black polypropylene conduit - 10 x glands & nuts
CPPR25	Contractor pack - 10m of 25mm black polypropylene - 10 x glands & nuts
<b>SPARES &amp; ACCESSORIES</b>	
R20B	Flexible conduit - 100m of 20mm black polypropylene conduit
R25B	Flexible conduit - 100m of 25mm black polypropylene conduit

**ROLLING CENTER  
JBCOMBI**  
JUNCTION BOX



**JUNCTION BOX**

JBCOMBI	308/5 - Junction box - 85 x 85 x 51mm - IP66 - grey
JBCOMBI2	607/5 - Junction box - 100 x 100 x 55mm - IP65 - grey




## NEED TECHNICAL?

Contact us on  
**WhatsApp**  
**0113 201 6672**  
for instant support

Alternatively scan the **QR**





## ROLLING CENTER & CDVI SD.50 & ADL ARMOURED DOOR LOOP

### ARMOURED DOOR LOOPS

SD.50	Armoured door loop - 50cm - internal or external use
ADL	Vandal resistant armoured door loop - 60cm - internal or external use



## NICE O-VIEW PROGRAMMING UNIT

Unit for control, programming and diagnostics for devices equipped with **BUS T4** connection, on site or remotely via GPRS thanks to the connection with your PDA, Smartphone or PC.

Advanced management: O-View is connected directly to the compatible control unit via a BUS T4 cable (supplied). By connecting **O-View** permanently to a control unit or group of control units via BUS T4, a network can be created for local or remote centralised management.

Simple programming mode with intuitive menus valid for each product, with no need to consult the specific instructions. **O-View** powers up and automatically recognises all devices on the network as soon as it is connected, displaying only the specific parameters of the device on which to intervene.

A practical wall-mounted support supplied.

Safe: two password- protected levels (for the user and the installer).

Practical: O-View is your portable office, and can be connected when programming, for maintenance- or can be installed permanently on site to exploit all the benefits of local or remote centralised management.

### PROGRAMMING CONTROL UNIT FOR NICE AUTOMATION

OVIEW	T4 BUS connection - programming control unit - for Nice automation
-------	--

#### SPARES & ACCESSORIES

IBT4N	OVIEW connection interface
O-VIEW CABLE	OVIEW 2m data cable - RJ11 connection

OVIEW PROGRAMMING UNIT	
OVIEW	
DIMENSIONAL & GENERAL DATA	
GRAPHIC INTERFACE	LCD DISPLAY 128X64 DOTS (46X29MM) 2.2"
OPERATOR INPUT DEVICE	JOYPAD WITH 5 + 2 KEYS
DISPLAY/KEY LIGHTING	WHITE LIGHT
TIME & DATE DISPLAY	WITH BACKUP BATTERY (MIN. LIFETIME 10 YEARS)
MAX COMMANDS PER HOUR	64
EVENT LOG	STORAGE CAPACITY 400 EVENTS
CONNECTION CABLE LENGTH	2M
POWER SUPPLY	SUPPLIED BY DEVICES ON BUS T4 NETWORK
ABSORBED CURRENT (MA)	MAX 20 WITHOUT ACCESSORIES
INSULATION	CLASS III
HOUSING PROTECTION RATING	IP20
WORKING TEMP (°C MIN/MAX)	-20 ÷ +55
DIMENSIONS (MM)	107 X 61 X 20 (WITH WALL MOUNT SUPPORT 125 X 70 X 32)
WEIGHT (G)	75 (WITHOUT CABLE)

# '22

2022 TRADE CATALOGUE

GATE HARDWARE  
GATE AUTOMATION  
ACCESS CONTROL  
GATE SAFETY  
ALUMINIUM GATES

**TEL.** 0113 201 6677

# SECTION D

# INTERCOMS

AUDIO INTERCOMS	112
WIRELESS AUDIO INTERCOMS	116
VIDEO INTERCOMS	120
2 WIRE VIDEO INTERCOMS	126
GSM INTERCOMS	130
WI-FI VIDEO INTERCOMS / DOORBELL	135
GSM VIDEO INTERCOMS	136
IP VIDEO INTERCOMS	140



## VIDEX 4000 SERIES SURFACE MOUNT AUDIO INTERCOM

Audio entry kits based on the **4000** Series modular design incorporating two way speech, electronic call tone and lock release facility.


The door station is available **surface** or **flush** mounting with up to **12 call buttons** each with a back lit name plate.



### SURFACE MOUNT AUDIO INTERCOM - 1 - 2 Button

4K-1S/M	4000 series - 1 button audio intercom system - matt finish - 3011 handset
4K-2S/M	4000 series - 2 button audio intercom system - matt finish - 3011 handset
<b>SPARES &amp; ACCESSORIES</b>	
4881	1 module 4000 series surface mount back-box - gun metal grey
4891	1 module 4000 series rainshield
4836-1/M	Speaker & call button module - 4000 series - 1 call button - matt finish
4836-2/M	Speaker & call button module - 4000 series - 2 call button - matt finish
3011	3000 series - 1 button - audio handset
321	Boxed transformer 12v a/c 15va
322	Boxed transformed 13v ac

### TECHNICAL INFO:

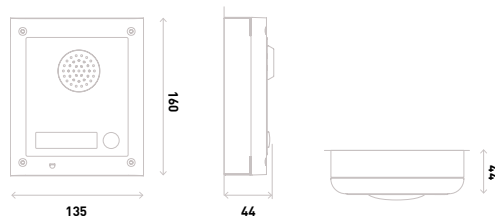

### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team for more information on 0113 201 6677 or email [Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)

### NICE ABOVEGROUND KITS



Turn to page **34**

Dimensions in: mm		VIDEX 4K-1S / 2S SURFACE MOUNT AUDIO INTERCOM	
POWER SUPPLY UNIT - 321		4K-1S	4K-2S
INPUT	230VAC		
OUTPUT	12VAC		
OUTDOOR STATION			
SPEECH UNIT RELAY	BUILT-IN 12VAC LOCK RELAY		
CALL BUTTONS	1	2	
INDOOR STATION			
SERIES	3000 SERIES SMART RANGE		
BUTTONS	1: DOOR OPEN		
CONTROLS	CALL TONE VOLUME LEVEL (3 LEVELS)		
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL	FOR EXTERNAL USE		
WORKING TEMP (°C MIN/MAX)	-10 - +50		
MOUNTING	SURFACE		



## SURFACE MOUNT AUDIO INTERCOM - 1 - 2 Button with keypad

**4K-1S/CL/M**

4000 series - 1 button audio intercom system - with keypad - matt finish - 3011 handset

**4K-2S/CL/M**

4000 series - 2 button audio intercom system - with keypad - matt finish - 3011 handset

### SPARES & ACCESSORIES

**4882**

2 module 4000 series surface mount back-box - gun metal grey

**4892**

2 module 4000 series rainshield

**4836-1/M**

Speaker &amp; call button module - 4000 series - 1 call button - matt finish

**4836-2/M**

Speaker &amp; call button module - 4000 series - 2 call button - matt finish

**4901/M**

4000 series keypad module - backlit buttons - matt finish

**3011**

3000 series - 1 button - audio handset

**321**

Boxed transformer 12v a/c 15va

**322**

Boxed transformed 13v ac




## VIDEX 4000 SERIES SURFACE MOUNT AUDIO INTERCOM WITH KEYPAD

Audio entry kits based on the **4000** Series modular design incorporating two way speech, electronic call tone and lock release facility.

The door station is available **surface** or **flush** mounting with up to **12 call buttons** each with a back lit name plate.

### TECHNICAL INFO:


**STANDARD  
3+1 AUDIO**

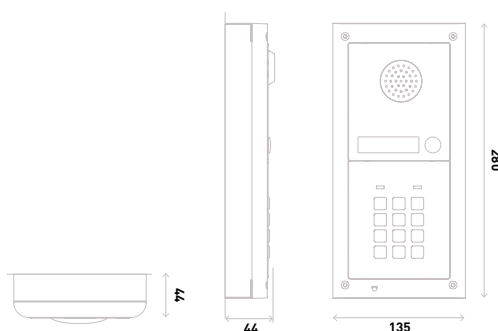**Codelock  
unit**

 Dimensions in: **mm**

#### VIDEX 4000 SERIES SURFACE MOUNT AUDIO INTERCOM

POWER SUPPLY UNIT - 321		4K-1S/CL	4K-2S/CL
INPUT	230VAC		
OUTPUT	12VAC		
OUTDOOR STATION			
SPEECH UNIT RELAY	BUILT-IN 12VAC LOCK RELAY		
KEYPAD RELAYS	3		
CALL BUTTONS	1		2
CODES	3		
INDOOR STATION			
SERIES	3000 SERIES SMART RANGE		
BUTTONS	1: DOOR OPEN		
CONTROLS	CALL TONE VOLUME LEVEL (3 LEVELS)		
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL	FOR EXTERNAL USE		
WORKING TEMP (°C MIN/MAX)	-10 - +50		
MOUNTING	SURFACE		

### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team for more information on 0113 201 6677 or email [Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)

### NEED MAGNETIC LOCKS?

See page **158** for details



## VIDEX 8000 SERIES SURFACE MOUNT AUDIO INTERCOM

The **8000** series audio 1 button kit allows calls to be answered on a standard B.T. type telephone removing the need for a dedicated intercom telephone and allowing the user to answer both telephone line calls and door panel calls from the same phone.


The door station is available **surface** or **flush** mounting with up to **12 call buttons** each with a back lit name plate.



### SURFACE MOUNT AUDIO INTERCOM - 1 - 2 Button

8K-1S	8000 series - 1 button audio intercom system - matt finish - 3011 handset
8K-2S	8000 series - 2 button audio intercom system - matt finish - 3011 handset
<b>SPARES &amp; ACCESSORIES</b>	
8881	1 module 8000 series surface mount back-box - gun metal grey
8871	1 module 8000 series rainshield
8836-1	Speaker & call button module - 8000 series - 1 call button - matt finish
8836-2	Speaker & call button module - 8000 series - 2 call button - matt finish
3011	3000 series - 1 button - audio handset
321	Boxed transformer 12v a/c 15va
322	Boxed transformed 13v ac

### TECHNICAL INFO:

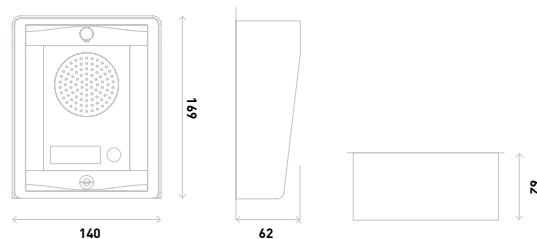

**FLUSH MOUNT  
OPTION ALSO  
AVAILABLE**

Speak with our sales team  
for more information on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**

**WE HAVE A FULL  
RANGE OF  
INTERCOMS  
AVAILABLE AT  
COMPETITIVE  
PRICES**

If you don't see what you're  
looking for call us on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**

Dimensions in: mm			VIDEX 8000 SERIES SURFACE MOUNT AUDIO INTERCOM	
POWER SUPPLY UNIT - 321			8K-1S	8K-2S
INPUT			230VAC	
OUTPUT			12VAC	
OUTDOOR STATION				
SPEECH UNIT RELAY			BUILT-IN 12VAC LOCK RELAY	
CALL BUTTONS			1	2
INDOOR STATION				
SERIES			3000 SERIES SMART RANGE	
BUTTONS			1: DOOR OPEN	
CONTROLS			CALL TONE VOLUME LEVEL (3 LEVELS)	
DIMENSIONAL & GENERAL DATA				
PROTECTION LEVEL			FOR EXTERNAL USE	
WORKING TEMP (°C MIN/MAX)			-10 - +50	
MOUNTING			SURFACE	



### SURFACE MOUNT AUDIO INTERCOM - 1 - 2 Button with keypad

8K-1S/CL	8000 series - 1 button audio intercom system - with keypad - matt finish - 3011 handset
8K-2S/CL	8000 series - 2 button audio intercom system - with keypad - matt finish - 3011 handset
<b>SPARES &amp; ACCESSORIES</b>	
8882	2 module 8000 series surface mount back-box - gun metal grey
8872	2 module 8000 series rainshield
8836-1	Speaker & call button module - 8000 series - 1 call button - matt finish
8836-2	Speaker & call button module - 8000 series - 2 call button - matt finish
VX8800	8000 series keypad module - illuminated buttons - matt finish
3011	3000 series - 1 button - audio handset
321	Boxed transformer 12v a/c 15va
322	Boxed transformed 13v ac



### VIDEX 8000 SERIES SURFACE MOUNT AUDIO INTERCOM WITH KEYPAD

This **8000** series audio 1 button kit allows calls to be answered on a standard B.T. type telephone removing the need for a dedicated intercom telephone and allowing the user to answer both telephone line calls and door panel calls from the same phone.

The door station is available **surface** or **flush** mounting with up to **12 call buttons** each with a back lit name plate.


### TECHNICAL INFO:



**STANDARD  
3+1 AUDIO**



**Codelock  
unit**

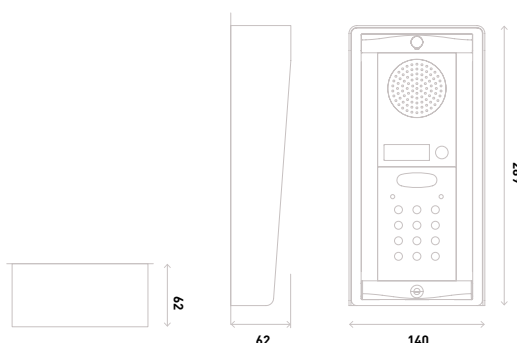

Dimensions in: mm		VIDEX 8000 SERIES SURFACE MOUNT AUDIO INTERCOM	
POWER SUPPLY UNIT - 321		8K-1S/CL	8K-2S/CL
INPUT		230VAC	
OUTPUT		12VAC	
OUTDOOR STATION			
SPEECH UNIT RELAY		BUILT-IN 12VAC LOCK RELAY	
KEYPAD RELAYS		2	
CALL BUTTONS	1		2
CODES		2	
INDOOR STATION			
SERIES		3000 SERIES SMART RANGE	
BUTTONS		1: DOOR OPEN	
CONTROLS		CALL TONE VOLUME LEVEL (3 LEVELS)	
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL		FOR EXTERNAL USE	
WORKING TEMP (°C MIN/MAX)		-10 - +50	
MOUNTING		SURFACE	

### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team for more information on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**

### NICE ROBUS KIT 3 SLIDING GATE KIT UP TO 1000KG



Turn to page **12**



## DAITEM SC901AU SURFACE MOUNT WIRELESS AUDIO INTERCOM

This wireless audio kit is versatile and simple to install as no cabling is required between the entry panel and handset. It is perfectly suited for homes with a gate entrance.

The controller included within this kit houses the radio transmission control board with a built-in antenna. It connects and supplies power to the entry panel as well as allowing connection of additional devices which can be controlled via the wireless handset.


The surface mount panel has a built-in proximity reader which allows users to the access building by presenting their fob to the reader, which then activates the door lock release. The panel is also supplied with a vandal resistant face plate, which protects the panel in bad weather conditions.



### SURFACE MOUNT WIRELESS AUDIO INTERCOM - 1 Button

SC901AU	1 button - wireless audio kit - 1 indoor handset - built-in proximity reader
<b>SPARES &amp; ACCESSORIES</b>	
MHF01X	1 button wireless audio panel
DB601	Armoured cover for 1 button outdoor caller unit
SC200AU	12v powered controller
SC100AU	Wireless audio handset
MTU01X	Handset battery 3.6v-200mah lithium-ion
SH804AX	Proximity tag
12V-1A-PSU	12v power supply with 1 amp output includes a 2.4m lead and UK plug

### TECHNICAL INFO:



#### HAYDON 12V 1A POWER SUPPLY UNIT



Turn to page **103**

DAITEM SURFACE MOUNT WIRELESS INTERCOM	
ELECTRICAL DATA	
INPUT	230VAC
OUTPUT	12/24VAC OR 12/30VDC
OUTDOOR STATION - SPEAKER UNIT	
RELAY	1X 12V - 1X VOLT FREE REALY (C, NO, NC)
CALL BUTTONS	1
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP 54 (OUTDOOR CALLER & CONTROL UNIT)
MOUNTING	SURFACE
OPERATING TEMP (°C MIN/MAX)	-20 - +70





### DAITEM SC902AU / SC902AU2 SURFACE MOUNT WIRELESS AUDIO INTERCOM WITH KEYPAD

This wireless audio kit is perfectly suitable for a single residential home with a gate entrance. It is also simple to install as no cabling is required between the entry panel and the handset.


The controller included in this kit houses the radio transmission control board which also has a built-in antenna. It supplies power to the entry panel as well as allows the connection of additional devices which can be controlled via the wireless handset.

The surface mount panel has a built-in proximity reader and a keypad which allows to enter the building by using the fob or a user code, which then activates the door lock release. The panel is also supplied with a vandal resistant face plate which protects it from bad weather conditions.

#### SURFACE MOUNT AUDIO INTERCOM - 1 - 2 Button with keypad

SC902AU	1 button - wireless audio kit - 1 indoor handset - built-in proximity reader
SC902AU2	2 button - wireless audio kit - 2 indoor handsets - built-in proximity reader
<b>SPARES &amp; ACCESSORIES</b>	
MHF02X	2 button wireless audio panel
DB721	Armoured cover for 1 button with keypad outdoor caller unit
DB722	Armoured cover for 2 button with keypad outdoor caller unit
SC200AU	12v powered controller
SC100AU	Wireless audio handset
MTU01X	Handset battery 3.6v-200mah lithium-ion
SH804AX	Proximity tag
12V-1A-PSU	12v power supply with 1 amp output includes a 2.4m lead and UK plug

#### TECHNICAL INFO:

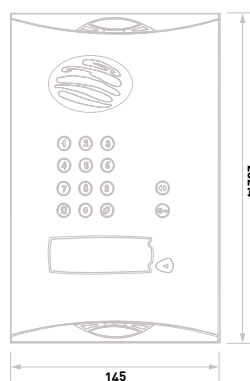

Dimensions in: mm

#### DAITEM SURFACE MOUNT WIRELESS INTERCOM

ELECTRICAL DATA		SC902AU
INPUT		230VAC
OUTPUT		12/24VAC OR 12/30VDC
OUTDOOR STATION - SPEAKER UNIT		
RELAY		1X 12V - 1X VOLT FREE RELAY (C, NO, NC)
CALL BUTTONS		1
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP 54 (OUTDOOR CALLER & CONTROL UNIT)
MOUNTING		SURFACE
OPERATING TEMP (°C MIN/MAX)		-20 - +70

**CAN'T SEE WHAT  
YOU'RE LOOKING  
FOR?**

Our friendly team are here to help.  
Call us on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**



## AES 603 D.E.C.T SURFACE MOUNT WIRELESS AUDIO INTERCOM

The **AES 603** range is ideal for when an entrance is a long distance from the main building, this wireless kit uses DECT technology for perfect audio quality over a long range.

Working range of 200 meters, up to 400 meters open field conditions. Blue back lighting illumination from behind the curved sides (**AB** & **AS** versions). Illuminated stainless steel push button. Gate / Door release relay built in

Available in three styles:

**603-AB** - Architectural model made from stainless steel with black acrylic fascia.

**603-AS** - Architectural model made from stainless steel with stainless fascia.


**603-IB** - Imperial model made from powder coated aluminium hood and black toughened acrylic faceplate trim.



### SURFACE MOUNT WIRELESS AUDIO INTERCOM - 1 Button

603-AB	Black - curved architectural model - blue back lighting effect
603-AS	Silver - curved architectural model - blue back lighting effect
603-IB	Black - imperial model - blue back lighting effect
<b>SPARES &amp; ACCESSORIES</b>	
603-T0-V2	603 replacement transmitter kit
603-EH-BLK	603 extra portable handset
603-WIFIA	Range extending antenna kit
KP-AES-ASSM	Keypad module assembly for AES panel (blue)

### TECHNICAL INFO:

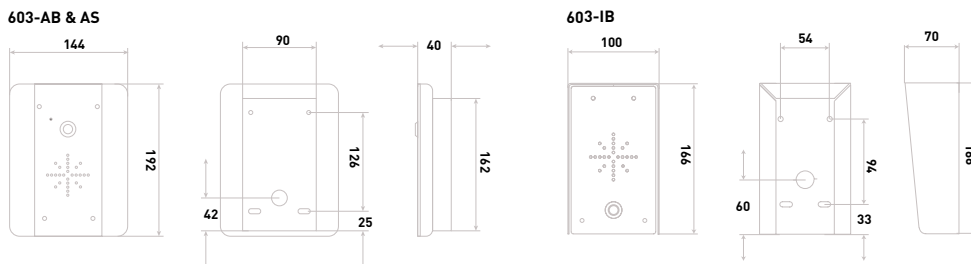

**FLUSH MOUNT  
OPTION ALSO  
AVAILABLE**

Speak with our sales team  
for more information on  
0113 201 6677 or email  
Info@rollingcenter.co.uk

**LOCINOX  
MAG & MAGMAG  
MAGNETIC GATE  
LOCKS**



Turn to page **162**

Dimensions in: mm		AES D.E.C.T SERIES AUDIO WIFI INTERCOM
OUTDOOR UNIT		603-AB / AS / IB
INPUT		230VAC
OUTPUT		24V AC/DC (24VDC 2A ADAPTOR INCLUDED)
CURRENT		65MA STANDBY - 400MA OPERATIONAL
RELAYS		2 - C, NO, NC
INDOOR UNIT		603-AB / AS / IB
INPUT		CHARGING BASE 5V DC - WALL UNIT 12V DC
VOLUME ADJUST		YES
VOICEMAIL CAPACITY		16
CALLING BETWEEN HANDSETS		YES
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		SPEECH UNIT IP55 - TRANSMITTER IP65
RANGE		400M OUTDOORS - 200M INDOORS
MOUNTING		SURFACE



## AES 603 D.E.C.T SURFACE MOUNT WIRELESS AUDIO INTERCOM WITH KEYPAD

The **AES 603** range with **keypad** is ideal for when an entrance is a long distance from the main building, this wireless kit uses DECT technology for perfect audio quality over a long range. Working range of 200 meters, up to 400 meters open field conditions. Blue back lighting illumination from behind the curved sides (**AB** & **AS** versions). Illuminated stainless steel push button.

The keypad now includes 3 relays and controls gate or door latch release, momentary operation and many additional operations. The keypad and release button are illuminated with neon blue lighting.

Available in three styles:

**603-ABK** - Architectural model made from stainless steel with black acrylic fascia.


**603-ASK** - Architectural model made from stainless steel with stainless fascia.

**603-IBK** - Imperial model made from powder coated aluminium hood and black toughened acrylic faceplate trim.

### SURFACE MOUNT WIRELESS AUDIO INTERCOM - 1 Button with keypad

603-ABK	Black - curved architectural model - blue back lighting effect - with keypad
603-ASK	Silver - curved architectural model - blue back lighting effect - with keypad
603-IBK	Black - imperial model - blue back lighting effect - with keypad
<b>SPARES &amp; ACCESSORIES</b>	
603-T0-V2	603 replacement transmitter kit
603-EH-BLK	603 extra portable handset
603-WIFIA	Range extending antenna kit
KP-AES-ASSM	Keypad module assembly for AES panel (blue)

### TECHNICAL INFO:

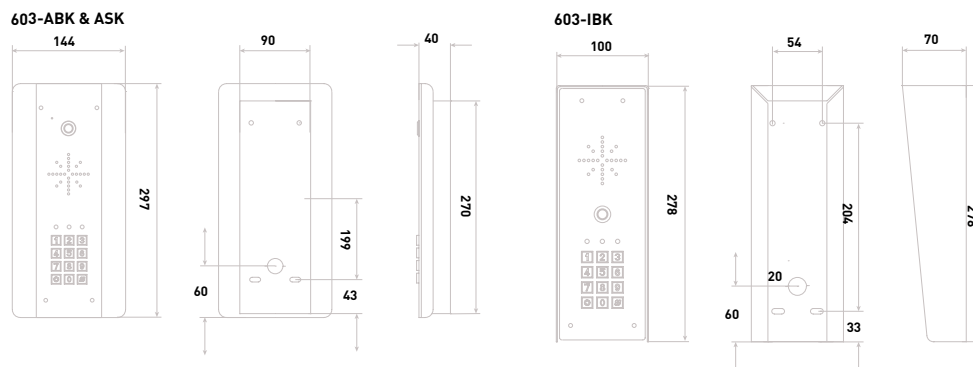

Dimensions in: mm

#### AES D.E.C.T SERIES AUDIO WIFI INTERCOM WITH KEYPAD

603-ABK / ASK / IBK	
INPUT	230VAC
OUTPUT	24V AC/DC (24VDC 2A ADAPTOR INCLUDED)
CURRENT	65MA STANDBY - 400MA OPERATIONAL
RELAYS	2 - C, NO, NC
603-AB / AS / IB	
INPUT	CHARGING BASE 5V DC - WALL UNIT 12V DC
VOLUME ADJUST	YES
VOICEMAIL CAPACITY	16
CALLING BETWEEN HANDSETS	YES
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	SPEECH UNIT IP55 - TRANSMITTER IP65
RANGE	400M OUTDOORS - 200M INDOORS
MOUNTING	SURFACE

**FLUSH MOUNT  
OPTION ALSO  
AVAILABLE**

Speak with our sales team for more information on 0113 201 6677 or email [Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)

**ROLLING CENTER  
WHATSAPP  
TECHNICAL**

Scan the QR code for instant help





## VIDEX 4000 SERIES SURFACE MOUNT VIDEO INTERCOM

The **4000** series video entry panels include DDA compliant reassurance tones and call progress LED's for call in progress, system busy, speak and door open. Non-coax (balanced video pair) colour videokits.

The flexible design allows for the addition of up to a total of 4 door entry panels (with additional **506N** relays) with up to 4 video handsets per call button. The system also benefits from intercommunication calls between the videophones within the same apartment or between videophones in different apartments.


The door station is available **surface** or **flush** mounting with a back lit name plate.



### SURFACE MOUNT VIDEO INTERCOM - 1 - 2 Button

VK4K-1S	4000 series - 1 button - video intercom - matt finish
VK4K-2S	4000 series - 2 button - video intercom - matt finish
<b>CHOOSE YOUR VIDEO MONITOR</b>	
6256	6200 series colour videophone - 3.5" LCD monitor - with handset
6358	6300 series colour videophone - 3.5" LCD monitor - hands free
6458	6400 series colour videophone - 4.3" LCD monitor - hands free
6758	6700 series colour videophone - 7" LCD monitor - hands free
<b>SPARES &amp; ACCESSORIES</b>	
4881	1 module 4000 series surface mount back-box - gun metal grey
4891	1 module 4000 series rainshield
4833X-1/M	Speaker, camera & call button module - 4000 series - 1 call button - matt finish
4833X-2/M	Speaker, camera & call button module - 4000 series - 2 call button - matt finish
850K	Boxed transformed 24vac 1.0a

### TECHNICAL INFO:

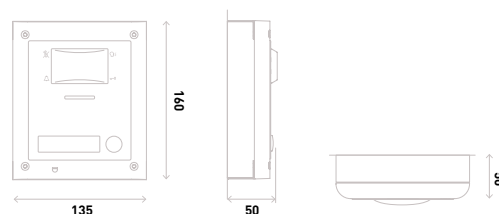

### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team for more information on 0113 201 6677 or email [Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)

### WE STOCK A VAST RANGE OF GEAR RACK AND MANY OTHER GATE HARDWARE PRODUCTS

Visit [www.rollingcenter.co.uk](http://www.rollingcenter.co.uk) or call 0113 201 6677 for more information.

VIDEX 4000 SERIES SURFACE MOUNT VIDEO INTERCOM		
POWER SUPPLY UNIT - 850K	VK4K-1S	VK4K-2S
INPUT	230VAC	
OUTPUT	24VAC	
OUTDOOR STATION - SPEAKER UNIT		
CAMERA	COLOUR CAMERA WITH WHITE LIGHT ILLUMINATION LEDs	
SPEECH UNIT RELAY	BUILT-IN LOCK RELAY DRY CONTACTS C, NC, NO OR CAPACITOR DISCHARGE	
LEDs	4: BUSY, RING, SPEAK, DOOR OPEN	
CALL BUTTONS	1	2
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL	FOR EXTERNAL USE	
WORKING TEMP (°C MIN/MAX)	-10 - +50	
MOUNTING	SURFACE	



## VIDEX 4000 SERIES SURFACE MOUNT VIDEO INTERCOM WITH KEYPAD

The **4000** series video entry panels include DDA compliant reassurance tones and call progress LED's for call in progress, system busy, speak and door open. Non-coax (balanced video pair) colour videokit.

The flexible design allows for the addition of up to a total of 4 door entry panels (with additional **506N** relays) with up to 4 video handsets per call button. The system also benefits from intercommunication calls between the videophones within the same apartment or between videophones in different apartments.

The door station is available **surface** or **flush** mounting with a back lit name plate.

### SURFACE MOUNT VIDEO INTERCOM - 1 - 2 Button with keypad

VK4KC-1S	4000 series - 1 button with keypad - video intercom - matt finish
VK4KC-2S	4000 series - 2 button with keypad - video intercom - matt finish
<b>CHOOSE YOUR VIDEO MONITOR</b>	
6256	6200 series colour videophone - 3.5" LCD monitor - with handset
6358	6300 series colour videophone - 3.5" LCD monitor - hands free
6458	6400 series colour videophone - 4.3" LCD monitor - hands free
6758	6700 series colour videophone - 7" LCD monitor - hands free
<b>SPARES &amp; ACCESSORIES</b>	
4882	2 module 4000 series surface mount back-box - gun metal grey
4892	2 module 4000 series rainshield
4833X-1/M	Speaker, camera & call button module - 4000 series - 1 call button - matt finish
4833X-2/M	Speaker, camera & call button module - 4000 series - 2 call button - matt finish
4901/M	4000 series keypad module - backlit buttons - matt finish
850K	Boxed transformed 24vac 1.0a

### TECHNICAL INFO:



Codelock  
unit




6 WIRE  
BUS



Intercom.



Wide camera  
opt.

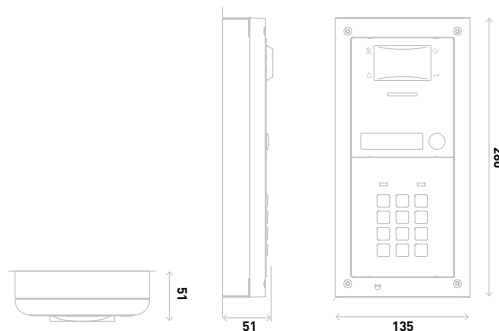

Dimensions in: mm

#### VIDEX 4000 SERIES SURFACE MOUNT VIDEO INTERCOM

POWER SUPPLY UNIT - 850K		VK4KC-1S	VK4KC-2S
INPUT		230VAC	
OUTPUT		24VAC	
OUTDOOR STATION - SPEAKER & CODELOCK UNIT			
CAMERA		COLOUR CAMERA WITH WHITE LIGHT ILLUMINATION LEDs	
SPEAKER UNIT RELAY		BUILT-IN LOCK RELAY DRY CONTACTS C, NC, NO OR CAPACITOR DISCHARGE	
LEDs		4: BUSY, RING, SPEAK, DOOR OPEN	
KEYPAD RELAYS		3	
CALL BUTTONS		1	2
CODES		3	
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL		FOR EXTERNAL USE	
WORKING TEMP (°C MIN/MAX)		-10 - +50	
MOUNTING		SURFACE	

### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team  
for more information on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**

### NICE ROBUS KIT 1 UP TO 600KG SLIDING GATE AUTOMATION



Turn to page **12**



## VIDEX 8000 SERIES SURFACE MOUNT VIDEO INTERCOM

1 and 2 button **8000** series colour videokit. The flexible design allows for the addition of up to a total of 4 entrance doors (using additional **506N** relays) and up to 4 video handsets per call button with intercommunication between the handsets in the same apartment or video handsets in different apartments.


The video entry panels (8833-1/C and 8833-2/C) incorporate a high quality colour camera with auto iris lens and white illumination LEDs. The system does not require coaxial cable as it uses a balanced video pair V1 and V2. The camera module also has a unit address adjustment (for 4 door setup), conversation time and reassurance tone controls.



### SURFACE MOUNT VIDEO INTERCOM - 1 - 2 Button

VK8K-1S	8000 series - 1 button - video intercom system
VK8K-2S	8000 series - 2 button - video intercom system
<b>CHOOSE YOUR VIDEO MONITOR</b>	
6256	6200 series colour videophone - 3.5" LCD monitor - with handset
6358	6300 series colour videophone - 3.5" LCD monitor - hands free
6458	6400 series colour videophone - 4.3" LCD monitor - hands free
6758	6700 series colour videophone - 7" LCD monitor - hands free
<b>SPARES &amp; ACCESSORIES</b>	
8885	1 Module 8000 series surface mount back-box - gun metal grey - with rainshield
8833-1/C	Speaker, camera & call button module - 8000 series - 1 call button - matt finish
8833-2/C	Speaker, camera & call button module - 8000 series - 2 call button - matt finish
850K	Boxed transformed 24vac 1.0a

### TECHNICAL INFO:

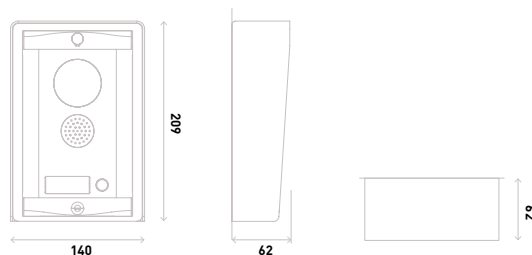

### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team  
for more information on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**

### BENINCA HEAVY DUTY HYDRAULIC SWING GATE AUTOMATION



Turn to page **44**

Dimensions in: mm		VIDEX 8000 SERIES SURFACE MOUNT VIDEO INTERCOM	
ELECTRICAL DATA		VK8K-1S	VK8K-2S
INPUT		230VAC	
OUTPUT		24VAC	
OUTDOOR STATION - SPEAKER UNIT			
CAMERA		COLOUR CAMERA WITH WHITE LIGHT ILLUMINATION LEDs	
SPEECH UNIT RELAY		BUILT-IN LOCK RELAY DRY CONTACTS C, NC, NO OR CAPACITOR DISCHARGE	
CALL BUTTONS		1	2
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL		FOR EXTERNAL USE	
WORKING TEMP (°C MIN/MAX)		-10 - +50	
MOUNTING		SURFACE	



## SURFACE MOUNT VIDEO INTERCOM - 1 - 2 Button with keypad

VK8KC-1S	8000 series - 1 button with keypad - video intercom system
VK8KC-2S	8000 series - 2 button with keypad - video intercom system

### CHOOSE YOUR VIDEO MONITOR

6256	6200 series colour videophone - 3.5" LCD monitor - with handset
6358	6300 series colour videophone - 3.5" LCD monitor - hands free
6458	6400 series colour videophone - 4.3" LCD monitor - hands free
6758	6700 series colour videophone - 7" LCD monitor - hands free

### SPARES & ACCESSORIES

8887	2 module 8000 series surface mount back-box - gun metal grey - with rainshield
8833-1/C	Speaker, camera & call button module - 8000 series - 1 call button - matt finish
8833-2/C	Speaker, camera & call button module - 8000 series - 2 call button - matt finish
VX8800	8000 series keypad module - illuminated buttons - matt finish
850K	Boxed transformed 24vac 1.0a



## VIDEX 8000 SERIES SURFACE MOUNT VIDEO INTERCOM WITH KEYPAD

1 and 2 button **8000** series colour videocode kits. The flexible design allows for the addition of up to a total of 4 entrance doors and up to 4 video handsets per call button with intercommunication between the handsets. Other facilities include adjustable call tone and time, camera recall (selectable), timed mute facility with led indication.

Door panels have adjustable reassurance tone and call progress LED's for calling, speak, door open and system busy. The system does not require coaxial cable. Available in surface (S) or flush with aluminium or black (BL) surround. The code lock has 2 codes, 2 changeover relay outputs and an override input. It can be programmed from 1-99 seconds or latching output.

### TECHNICAL INFO:




Codelock unit



6 WIRE BUS



Intercom.

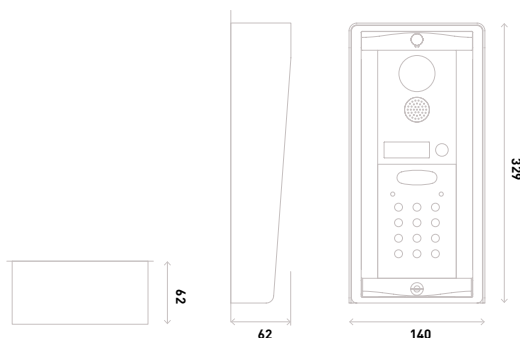

### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team for more information on 0113 201 6677 or email [Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)

### LOOKING FOR SLIDING GATE AUTOMATION EQUIPMENT?

Visit [www.rollingcenter.co.uk](http://www.rollingcenter.co.uk) or call 0113 201 6677 for more information.

Dimensions in: mm

#### VIDEX 8000 SERIES SURFACE MOUNT VIDEO INTERCOM

ELECTRICAL DATA		VK8KC-1S	VK8KC-2S
INPUT		230VAC	
OUTPUT		24VAC	
OUTDOOR STATION - SPEAKER & CODELOCK UNIT			
CAMERA		COLOUR CAMERA WITH WHITE LIGHT ILLUMINATION LEDs	
SPEAKER UNIT RELAY		BUILT-IN LOCK RELAY DRY CONTACTS C, NC, NO OR CAPACITOR DISCHARGE	
KEYPAD RELAYS		2	
CALL BUTTONS		1	2
CODES		2	
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL		FOR EXTERNAL USE	
WORKING TEMP (°C MIN/MAX)		-10 - +50	
MOUNTING		SURFACE	



## AES STYLUSCOM SERIES SURFACE MOUNT VIDEO INTERCOM

The **Styluscom-AB** (without keypad) system allows you to receive video intercom calls from your doors or gates, allowing you to allow (or deny) access to visitors. With additional dome or bullet cameras available to be linked into the system, you can now monitor other areas of interest at any given time to give you peace of mind.

It is also possible to override the door station camera with an overhead dome or bullet camera, giving you much more diversity in terms of how you want to view visitors to the door.

Built into the system is the option to record still images from the front door station every time a visitor calls.



### SURFACE MOUNT VIDEO INTERCOM - 1 Button

STYLUS-VID-AB-EU

Black - video intercom - curved architectural model - blue back lighting effect

#### SPARES & ACCESSORIES

STYLUS-VID-4.3-EU

Additional monitor (white)

KP-AES-ASSM

Keypad module assembly for AES panel (blue)


KPW-AES-ASSM

Keypad module assembly for AES panel (white)

SC-MAIN-PCBA-V2

Control PCB for Styluscom, camera PCBA &amp; MIC

#### TECHNICAL INFO:

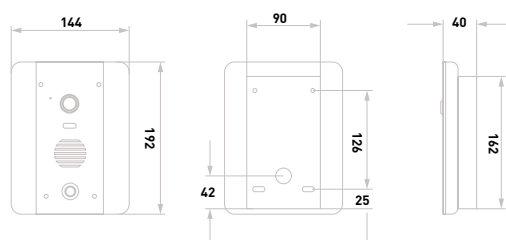

**FLUSH MOUNT  
OPTION ALSO  
AVAILABLE**

Speak with our sales team  
for more information on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**

**ROLLING CENTER  
COMPOSITE  
FENCE BOARDS**



Turn to page **258**

Dimensions in: mm

#### AES STYLUS VIDEO INTERCOM

ELECTRICAL DATA		STYLUSCOM-AB
INPUT		230VAC
OUTPUT		24V AC/DC (24VDC 2A ADAPTOR INCLUDED)
CURRENT		750MA MAX - 2A PEAK DEMAND WITH 1 MONITOR (EACH ADDITIONAL MONITOR +600MA)
RELAY LOAD		2A 24V AC MAX
RELAY TYPE		C, NO, NC
RELAYS		2
MONITOR POWER SUPPLY		12VDC FROM BOARD
CAMERA		110° VIEWING ANGLE 800TVL QUALITY
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP55
MOUNTING		SURFACE





### SURFACE MOUNT VIDEO INTERCOM - 1 Button with keypad

STYLUS-VID-ABK-EU

Black - video intercom - curved architectural model - blue back lighting effect

#### SPARES & ACCESSORIES

STYLUS-VID-4.3-EU	Additional monitor (white)
KP-AES-ASSM	Keypad module assembly for AES panel (blue)
KPW-AES-ASSM	Keypad module assembly for AES panel (white)
SC-MAIN-PCBA-V2	Control PCB for Styluscom, camera PCBA & MIC




### AES STYLUSCOM SERIES SURFACE MOUNT VIDEO INTERCOM WITH KEYPAD

The **Styluscom-ABK** (with keypad) system allows you to receive video intercom calls from your doors or gates, allowing you to allow (or deny) access to visitors. With additional dome or bullet cameras available to be linked into the system, you can now monitor other areas of interest at any given time to give you peace of mind.

It is also possible to override the door station camera with an overhead dome or bullet camera, giving you much more diversity in terms of how you want to view visitors to the door.

Built into the system is the option to record still images from the front door station every time a visitor calls.

#### TECHNICAL INFO:

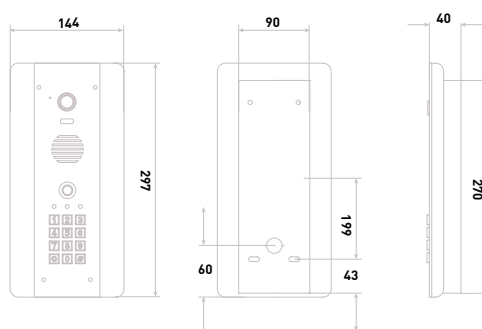

Dimensions in: mm

#### AES STYLUS VIDEO INTERCOM WITH KEYPAD

ELECTRICAL DATA		STYLUSCOM-ABK
INPUT		230VAC
OUTPUT		24V AC/DC (24VDC 2A ADAPTOR INCLUDED)
CURRENT		850MA MAX - 2A PEAK DEMAND WITH 1 MONITOR (EACH ADDITIONAL MONITOR +600MA)
RELAY LOAD		2A 24V AC MAX
RELAY TYPE		C, NO, NC
RELAYS		2
MONITOR POWER SUPPLY		12VDC FROM BOARD
CAMERA		110° VIEWING ANGLE 800TVL QUALITY
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP55
MOUNTING		SURFACE

**FLUSH MOUNT  
OPTION ALSO  
AVAILABLE**

Speak with our sales team  
for more information on  
0113 201 6677 or email  
Info@rollingcenter.co.uk

**REGISTER FOR A  
TRADE ACCOUNT  
TODAY  
TO RECEIVE TRADE  
DISCOUNTS**

Call us on  
0113 201 6677 our friendly  
team are here to help.



## VIDEX ESVKX SERIES SURFACE MOUNT 2 WIRE VIDEO INTERCOM

The **ESVKX** series "True" 2 wire colour videokits with **proximity** are available as **1** or **2** button **4000** series colour videokits where the flexible design allows for up to a total of 4 videophones per call button with the facility for intercommunication between the videophones in the same apartment or intercommunication between videophones in different apartments.


The door station is available **surface** or **flush** mounting with a back lit name plate. with a choice of 4 different videophone options from the **6286**, **6388**, **6488** and **6788** series range.



### SURFACE MOUNT 2 WIRE VIDEO INTERCOM - 1 - 2 Button

ESVKX-1S	4000 series 2 wire video - 1 button - video intercom - matt finish
ESVKX-2S	4000 series 2 wire video - 2 button - video intercom - matt finish
<b>CHOOSE YOUR VIDEO MONITOR</b>	
6286	6200 series colour videophone - 3.5" LCD monitor - with handset
6388	6300 series colour videophone - 3.5" LCD monitor - hands free
6488	6400 series colour videophone - 4.3" LCD monitor - hands free
6788	6700 series colour videophone - 7" LCD monitor - hands free
<b>VIDEO MONITOR CHOICES</b>	
4881	1 Module 4000 series surface mount back-box - gun metal grey
4384X-1/M	Speaker, camera & call button module - 4000 series - 1 call button - matt finish
4384X-2/M	Speaker, camera & call button module - 4000 series - 2 call button - matt finish
2321	Boxed transformed 32vdc current 0.8a
955/T	EM4002 formate proximity tag 125khz

### TECHNICAL INFO:



### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team  
for more information on  
0113 201 6677 or email  
Info@rollingcenter.co.uk

### ROLLING CENTER CANTILEVER SYSTEMS

See page **215** for details

Dimensions in: mm		VIDEX 4000 SERIES 2 WIRE SURFACE MOUNT VIDEO INTERCOM	
POWER SUPPLY UNIT - 2321		ESVKX-1S	ESVKX-2S
INPUT		230VAC	
OUTPUT		32VDC	
OUTDOOR STATION - SPEAKER UNIT			
CAMERA		COLOUR CAMERA WITH WHITE LIGHT ILLUMINATION LEDs	
SPEECH UNIT RELAY		BUILT-IN LOCK RELAY DRY CONTACTS C, NC, NO OR CAPACITOR DISCHARGE	
LEDs		4: BUSY, RING, SPEAK, DOOR OPEN	
CALL BUTTONS		1	2
PROXIMITY		PROXIMITY READER 125KHZ UP TO 50 TAGS	
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL		FOR EXTERNAL USE	
WORKING TEMP (°C MIN/MAX)		-10 - +50	
MOUNTING		SURFACE	



## SURFACE MOUNT VIDEO INTERCOM - 1 - 2 Button with keypad

ESVKC-1S	4000 series 2 wire video - 1 button with keypad - video intercom - matt finish
ESVKC-2S	4000 series 2 wire video - 2 button with keypad - video intercom - matt finish

### CHOOSE YOUR VIDEO MONITOR

6286	6200 series colour videophone - 3.5" LCD monitor - with handset
6388	6300 series colour videophone - 3.5" LCD monitor - hands free
6488	6400 series colour videophone - 4.3" LCD monitor - hands free
6788	6700 series colour videophone - 7" LCD monitor - hands free

### SPARES & ACCESSORIES

4882	2 Module 4000 series surface mount back-box - gun metal grey
4384X-1/M	Camera & speaker module - 4000 series - 1 call button - matt finish
4384X-2/M	Camera & speaker module - 4000 series - 2 call button - matt finish
4901/M	4000 series keypad module - backlit buttons - matt finish
2321	Boxed transformed 32vdc current 0.8a
2322	KEYPAD POWER PSU

### TECHNICAL INFO:



Codelock unit




2 WIRE BUS



Intercom.



Wide camera opt.

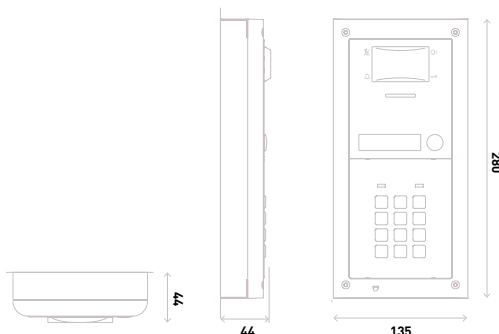

Dimensions in: mm

#### VIDEX 4000 SERIES 2 WIRE SURFACE MOUNT VIDEO INTERCOM

POWER SUPPLY UNIT - 2321	ESVKC-1S	ESVKC-2S
INPUT	230VAC	
OUTPUT	32VDC	
KEYPAD PSU CONVERTER 2322	BUS LINE / 12VDC / 100MA	
OUTDOOR STATION - SPEAKER & CODELOCK UNIT		
CAMERA	COLOUR CAMERA WITH WHITE LIGHT ILLUMINATION LEDs	
SPEECH UNIT RELAY	BUILT-IN LOCK RELAY DRY CONTACTS C, NC, NO OR CAPACITOR DISCHARGE	
LEDs	4: BUSY, RING, SPEAK, DOOR OPEN	
KEYPAD RELAYS	2	
CALL BUTTONS	1	2
CODES	3	
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL	FOR EXTERNAL USE	
WORKING TEMP (°C MIN/MAX)	-10 - +50	
MOUNTING	SURFACE	



## VIDEX ESVKC SURFACE MOUNT 2 WIRE VIDEO INTERCOM WITH KEYPAD

The **ESVKC** series "True" 2 wire colour videokits with codelock and **proximity** are available as **1** or **2** button **4000** series colour videokits where the flexible design allows for up to a total of 4 videophones per call button with the facility for intercommunication between the videophones in the same apartment or intercommunication between videophones in different apartments.

The door station is available **surface** or **flush** mounting with a back lit name plate, with a choice of 4 different videophone options from the **6286**, **6388**, **6488** and **6788** series range.

### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team for more information on  
0113 201 6677 or email  
Info@rollingcenter.co.uk

### WE HAVE A FULL RANGE OF INTERCOMS AVAILABLE AT COMPETITIVE PRICES

If you don't see what you're looking for call us on  
0113 201 6677 or email  
Info@rollingcenter.co.uk



## CDVI CDV4791S-DX SURFACE MOUNT 2 WIRE VIDEO INTERCOM

The **2EASY Series** from CDVI offer advanced communication directly to your mobile device thanks to its WiFi connection with no monthly or annual subscription cost.

Thanks to its 2-wire non polarised connection, installation and maintenance is simple and straightforward.

The **CDV-47DX** now includes WiFi connection and a new mobile app, allowing users to control access from their mobile phone by receiving calls or remotely releasing multiple locks. (max 2 locks when used with optional CDV-RLC)




### SURFACE MOUNT 2 WIRE VIDEO INTERCOM - 1 Button

CDV4791S-DX-W	2EASY - 1 button - 2 wire - video intercom - WiFi connectivity - 7" white monitor
CDV4791S-DX-B	2EASY - 1 button - 2 wire - video intercom - WiFi connectivity - 7" black monitor
<b>SPARES &amp; ACCESSORIES</b>	
CDV-47DX-W	WiFi connectivity - 7" white monitor
CDV-47DX-B	WiFi connectivity - 7" black monitor
CDV-PC6	Power / bus combiner
CDV-91S	Outdoor station - 1 button

### TECHNICAL INFO:

### GET THE APP

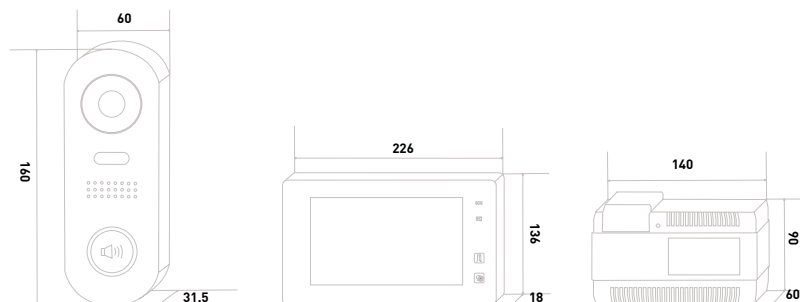

### NEED ASSISTANCE WITH CHOOSING THE RIGHT KIT?

Call us on  
**0113 201 6677** our friendly  
team are here to help.

Dimensions in: mm		CDVI CDV91S - CDV-47DX SPECIFICATION
<b>CDV91S SPEC</b>		
INPUT		230VAC
OUTPUT		24VDC
CURRENT		14MA STANDBY - 122MA OPERATIONAL
CAMERA		COLOUR CMOS 2.0MEGA PIXEL - 1/2.7" FISHEYE CAMERA - 170° WIDE ANGEL
LOCK POWER SUPPLY		12VDC 2500MA INTERNAL POWER (STRIKE LOCKS)
WORKING TEMP (°C MIN/MAX)		-15 - +55
<b>CDV-47DX SPEC</b>		
MONITOR SCREEN		7 INCH DIGITAL COLOUR TFT



## SURFACE MOUNT 2 WIRE VIDEO INTERCOM - 1 Button with keypad

CDV4796KP-DX-W	2EASY - 1 button with keypad - 2 wire - video intercom - WiFi connectivity - 7" white monitor
CDV4796KP-DX-B	2EASY - 1 button with keypad - 2 wire - video intercom - WiFi connectivity - 7" black monitor

### SPARES & ACCESSORIES

CDV-47DX-W	WiFi connectivity - 7" white monitor
CDV-47DX-B	WiFi connectivity - 7" black monitor
CDV-PC6	Power / bus combiner
CDV-96KP	Outdoor station - 1 button and keypad



## CDVI CDV4796KP-DX SURFACE MOUNT 2 WIRE VIDEO INTERCOM WITH KEYPAD

The **2EASY Series** from CDVI offer you advanced communication directly to your mobile device thanks to its WiFi connection with no monthly or annual subscription cost.


Thanks to its 2-wire non polarised connection, installation and maintenance is simple and straightforward.

The **CDV-47DX** now includes WiFi connection and a new mobile app, allowing users to control access from their mobile phone by receiving calls or remotely releasing multiple locks.

### GET THE APP



### TECHNICAL INFO:

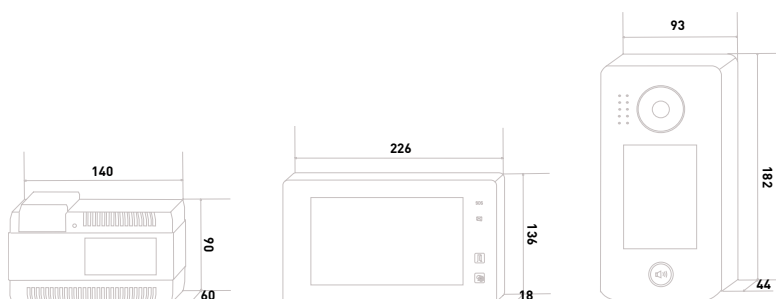

Dimensions in: mm

#### CDVI CDV96KP - CDV-47DX SPECIFICATION

CDV96KP SPEC	
INPUT	230VAC
OUTPUT	24VDC
CURRENT	14MA STANDBY - 122MA OPERATIONAL
CAMERA	COLOUR CMOS 2.0MEGA PIXEL - 1/2.7" FISHEYE CAMERA - 170° WIDE ANGEL
LOCK POWER SUPPLY	12VDC 2500MA INTERNAL POWER (STRIKE LOCK)
WORKING TEMP (°C MIN/MAX)	-15 - +55
CDV-47DX SPEC	
MONITOR SCREEN	7 INCH DIGITAL COLOUR TFT

**CABLES &  
CONDUIT  
AVAILABLE**

See page **106** for details



## VIDEX 4000 SERIES SURFACE MOUNT GSM INTERCOM

The new **4000 series 4G GSM PRO** audiokits with **proximity** comprise all the original features of the previous **GSM PRO** series kits and now include new programming features such as: programming a primary number and 3 divert numbers in a single text, programming multiple dial to open numbers (up to 5 max.) in a single text, 10 access control timebands, 10 free access timebands and access level assignment (up to 10)

Programming can be carried out by SMS text messaging or via a PC using the **GSMSK** software (connected via the micro USB port) or by using Videx's new smartphone SMS wizard App. The App is available to download for free from Google Play (for android devices) or from the App. Store (for iOS devices).

The door station is available **surface** or **flush** mounting with up to **12 call buttons** each with a back lit name plate.

### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team for more information on **0113 201 6677** or email **Info@rollingcenter.co.uk**

### NICE RUNKIT 1 UP TO 1500KG



Turn to page **13**




### SURFACE MOUNT GSM INTERCOM - 1 - 2 Button - matt & gun metal grey finish

GSM4K-1S/M/4G	4G GSM intercom - 1 button - proximity reader - matt finish
GSM4K-2S/M/4G	4G GSM intercom - 2 button - proximity reader - matt finish
GSM4K-1S/BL/4G	4G GSM intercom - 1 button - proximity reader - gun metal grey finish
GSM4K-2S/BL/4G	4G GSM intercom - 2 button - proximity reader - gun metal grey finish
<b>SPARES &amp; ACCESSORIES</b>	
4881	1 Module 4000 series back-box - gun metal grey
4810-1/M/4G	4000 series 4G GSM 1 button & speaker module - with proximity reader - matt finish
4810-2/M/4G	4000 series 4G GSM 2 button & speaker module - with proximity reader - matt finish
4810-1/BL/4G	4000 series 4G GSM 1 button & speaker module - with proximity reader - gun metal grey finish
4810-2/BL/4G	4000 series 4G GSM 2 button & speaker module - with proximity reader - gun metal grey finish
HDR 15-12	Switched mode 12V DC 1.25Ah power supply
434	GSM antenna with magnetic base L bracket - 2G, 3G & 4G
955/T	EM4002 format proximity tag 125khz
GSMSK	GSM programming software

### TECHNICAL INFO:

### GET THE APP

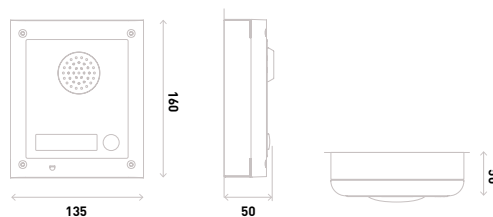

Dimensions in: mm		VIDEX 4000 SERIES SURFACE MOUNT GSM INTERCOM	
POWER SUPPLY UNIT - HDR 15-12		GSM4K-1S	GSM4K-2S
INPUT		230VAC	
OUTPUT		12VDC	
OUTDOOR STATION - SPEAKER / PROXIMITY UNIT			
SPEACH UNIT RELAY		BUILT-IN LOCK RELAY DRY CONTACTS C, NC, NO OR CAPACITOR DISCHARGE	
LEDs		4: BUSY, RING, SPEAK, DOOR OPEN	
CALL BUTTONS		1	2
PROXIMITY		PROXIMITY READER 125KHZ UP TO 1000 TAGS	
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL		FOR EXTERNAL USE	
WORKING TEMP (°C MIN/MAX)		-10 - +50	
MOUNTING		SURFACE	



## SURFACE MOUNT GSM INTERCOM - 1 - 2 Button with keypad - matt & gun metal grey finish

GSM4KCR-1S/M/4G	4G GSM intercom - 1 button with keypad - proximity reader - matt finish
GSM4KCR-2S/M/4G	4G GSM intercom - 2 button with keypad - proximity reader - matt finish
GSM4KCR-1S/BL/4G	4G GSM intercom - 1 button with keypad - proximity reader - gun metal grey finish
GSM4KCR-2S/BL/4G	4G GSM intercom - 2 button with keypad - proximity reader - gun metal grey finish
<b>SPARES &amp; ACCESSORIES</b>	
4882	2 Module 4000 series back-box - gun metal grey
4810-1/M/4G	4000 series 4G GSM 1 button & speaker module - with proximity reader - matt finish
4810-2/M/4G	4000 series 4G GSM 2 button & speaker module - with proximity reader - matt finish
4810-1/BL/4G	4000 series 4G GSM 1 button & speaker module - with proximity reader - gun metal grey finish
4810-2/BL/4G	4000 series 4G GSM 2 button & speaker module - with proximity reader - gun metal grey finish
4903/M	4000 series GSM keypad module - backlit buttons - matt finish
4903/BL	4000 series GSM keypad module - backlit buttons - gun metal grey finish
HDR 15-12	Switched mode 12V DC 1.25Ah power supply
434	GSM antenna with magnetic base L bracket - 2G, 3G & 4G
955/T	EM4002 format proximity tag 125khz
GSM SK	GSM programming software

GET THE APP

## TECHNICAL INFO:




GSM



Proximity reader



Code lock unit

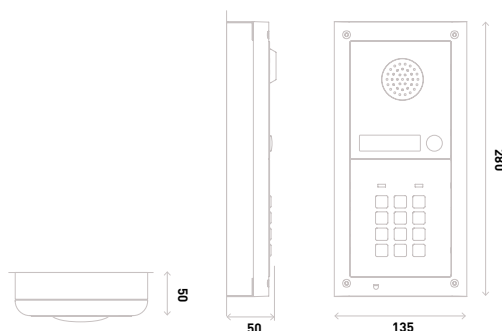

Dimensions in: mm

### VIDEX 4000 SERIES SURFACE MOUNT GSM INTERCOM

POWER SUPPLY UNIT - HDR 15-12		GSM4KCR-1S	GSM4KCR-2S
INPUT		230VAC	
OUTPUT		12VDC	
OUTDOOR STATION - SPEAKER & CODELOCK UNIT			
SPEECH UNIT RELAY		BUILT-IN LOCK RELAY DRY CONTACTS C, NC, NO OR CAPACITOR DISCHARGE	
LEDs		4: BUSY, RING, SPEAK, DOOR OPEN	
KEYPAD RELAYS		2	
CALL BUTTONS		1	2
CODES		400, 32 TEMPORARY	
PROXIMITY		PROXIMITY READER 125KHZ UP TO 1000 TAGS	
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL		FOR EXTERNAL USE	
WORKING TEMP (°C MIN/MAX)		-10 ÷ +50	
MOUNTING		SURFACE	



## VIDEX 4000 SERIES SURFACE MOUNT GSM INTERCOM WITH KEYPAD

The new **4000** series **4G GSM PRO** audiokits with code lock and **proximity** comprise all the original features of the previous **GSM PRO** series kits and now include new programming features such as: programming a primary number and 3 divert numbers in a single text, programming multiple dial to open numbers (up to 5 max.) in a single text, 10 access control timebands, 10 free access timebands and access level assignment (up to 10)

Programming can be carried out by SMS text messaging or via a PC using the **GSM SK** software (connected via the micro USB port) or by using Vindex's new smartphone SMS wizard App. The App is available to download for free from Google Play (for android devices) or from the App. Store (for iOS devices).

The door station is available **surface** or **flush** mounting with up to **12 call buttons** each with a back lit name plate.

## FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team for more information on **0113 201 6677** or email **Info@rollingcenter.co.uk**

## ROLLING CENTER WHATSAPP TECHNICAL

Scan the QR code for instant help







## VIDEX 4000 SERIES SURFACE MOUNT DIGITAL GSM INTERCOM WITH KEYPAD

With GSM comes freedom. Answer calls from your door or gate from any telephone number including your mobile so you never have to miss that important caller.

With four variants: **4812**, **4812R** and **vandal resistant VR4812** and **VR4812R** versions available the digital GSM intercom is available for small or large scale applications with the ability to call up to 500 apartments all with the facility to divert to additional numbers if the first is busy or unanswered.

Other features include integrated proximity access control (for up to 2000 users) and call progress announcement both verbally and shown via the graphical display. New programming features include: programming a primary number and 3 divert numbers in a single text and 10 free access timebands.





### SURFACE MOUNT DIGITAL GSM INTERCOM - with scroll function or keys A-F with keypad

4812R/M/4G	Panel only - digital 4G GSM - scroll function
4812/M/4G	Panel only - digital 4G GSM - A - F keys
<b>SPARES &amp; ACCESSORIES (REQUIRED TO COMPLETE A KIT)</b>	
4882	2 module 4000 series surface mount back-box - gun metal grey
HDR 15-12	Switched mode 12V DC 1.25Ah power supply
434	GSM antenna with magnetic base L bracket - 2G, 3G & 4G
955/T	EM4002 format proximity tag 125khz
GSM SK	GSM programming software

### TECHNICAL INFO:

### GET THE APP

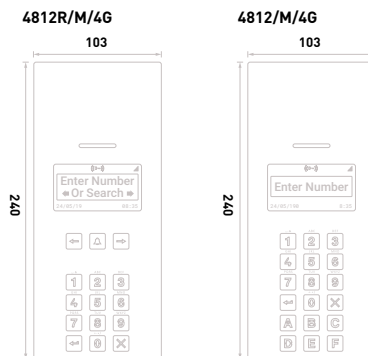

### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team for more information on 0113 201 6677 or email [Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)

### LOCINOX ELECTRADROP ELECTRIC DROP BOLT



Turn to page **165**

Dimensions in: mm		VIDEX 4000 SERIES SURFACE MOUNT DIGITAL GSM INTERCOM	
ELECTRICAL DATA		4812 & 4812R	
INPUT		230VAC	
OUTPUT		12VDC	
RELAYS		1X RELAY (C, NO, NC) 31 @24VDC - 3A @120VAC	
RTE INPUT		AUXILIARY 1 (AO OPEN COLLECTOR OUTPUT) SWITCHED 0V - 150MA MAX PUSH TO EXIT - SWITCHED 0V	
OUTDOOR STATION - SPEAKER / PROXIMITY UNIT			
DISPLAY		DIGITAL	
USERS		UP TO 500 (MAX)	
PROXIMITY		PROXIMITY READER 125KHZ UP TO 500 TAGS	
DIAL TO OPEN		2000 USERS	
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL		FOR EXTERNAL USE	
WORKING TEMP (°C MIN/MAX)		-10 - +50	
MOUNTING		SURFACE	





NEW



## SURFACE MOUNT GSM LITE INTERCOM - 1 Button with keypad

LITE-GSM-KP

4G Lite GSM intercom - 1 button with keypad - black imperial finish - with antenna & keypad

### SPARES & ACCESSORIES

LITE-PCB/4GE

4G European lite PCB

PRIME-RKP

Replacement keypad for Lite GSM

## AES LITE GSM SURFACE MOUNT GSM INTERCOM WITH KEYPAD


Simple, Effective GSM Intercom

- Calls your home phone and mobiles on roll-over when visitor presses call button.
- Never miss a visitor with mobile calling.
- Works with any standard contract or Pre-Pay GSM Nano SIM card.
- Comes with optional 12 month contract SIM, unlimited calls and texts.
- NEW free AES Lite app for installer programming.
- Homeowner can use app to trigger gates.

GET THE APP



### TECHNICAL INFO:

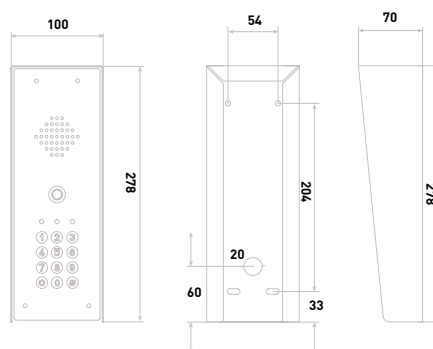

Dimensions in: mm

### AES LITE GSM INTERCOM WITH KEYPAD

ELECTRICAL DATA		LITE-IBK-EU
INPUT		230VDC
OUTPUT		24V AC/DC (24VDC 2A ADAPTOR INCLUDED)
CURRENT		100MA DIAL OUT - 220MA MAX
CONSTRUCTION		MARINE STAINLESS & POWDER COATED ALUMINIUM
RELAYS / KEYPAD RELAYS		1X VOLT FREE RELAY (C, NO, NC) 2A @24VAC MAX
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP55
RANGE		GSM NETWORK
MOUNTING		SURFACE

**WE STOCK A  
FULL RANGE  
OF GATE  
AUTOMATION**

See page 7 for details



## COMELIT GSM1 SURFACE MOUNT GSM INTERCOM WITH KEYPAD

Comelit 4G **GSM1-K** Intercom is designed to work with gates, barriers and door entry. Suitable for residential properties or small office. The intercom has 1 call button and built in keypad.

Utilizing **2G, 3G & 4G** networks where available calls are received on standard telephones or mobile phones.

Install a SIM card from any network in the panel, then using the easy to use APP, or via the keypad just program the numbers required. When the call button is pressed the recipient can talk to the visitor and let them in by pressing #

Avoid missing callers, the additional numbers can be programmed to forward the call on to other devices / phone numbers – never miss an important delivery again!

NEW




### SURFACE MOUNT GSM INTERCOM - with keypad

GSM1-K

4G GSM intercom - 1 button with keypad

### TECHNICAL INFO:

### GET THE APP

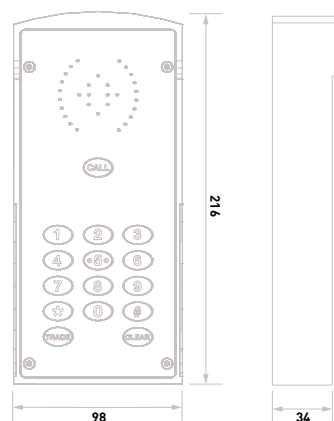

**CAN'T SEE WHAT  
YOU'RE LOOKING  
FOR?**

Our friendly team are here to help.  
Call us on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**

Dimensions in: mm		COMELIT SURFACE MOUNT GSM INTERCOM WITH KEYPAD
ELECTRICAL DATA		GSM1-K
INPUT		230VAC
OUTPUT		12VDC
CURRENT		1.5A MAX
OUTDOOR STATION - SPEAKER & CODELOCK UNIT		
RELAYS		3X VOLT FREE RELAY CONTACTS - 1@2A - 2@200MA
CALLER ID'S		300
CALL BUTTONS		1
CODES		3 DEFAULT 4 DIGIT PIN CODES
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP54
MOUNTING		SURFACE



## COMELIT KIT VISTO WIRELESS WIFI VIDEO DOORBELL / INTERCOM

### More than just a doorbell.

The revolutionary wireless doorbell, visto lets you see, hear and speak with your visitors easily from your own smartphone. On holiday or at work, home or away, wherever you are.

**Unique, original design** designed in Italy by Milanese architects, characterised by its clean, elegant lines. The unique and original design of this wireless doorbell stands out for its use of technologically advanced materials and up-to-the-minute colours: cloud white, silver mist and dark graphite.

Advanced security with innovative WIFI doorbell. **Hd camera** high quality video resolution.

**Two-way audio** via built in speaker and microphone.

**Night vision** 24/7 Protection thanks to infrared LED's

**Connection with home router** with Ethernet cable or WIFI depending on the model.

**Motion detection** sends alerts to smartphone.

**Cloud recording** live recording to cloud service with subscription.

### Visto app, with you always.

The visto app is the main interface through which users can easily interact with the cameras and the visto doorbell. It allows full two-way communication in hd video and crystal-clear audio. With the app, you can record images from all the doorbells and all the cameras in the visto range, as well as save video clips to the cloud service.

The visto kit utilises the power from your existing doorbell transformer or power supply (**12-24vac** or **12-33vdc**)

Complete with adapter to interface with your existing doorbell chime. Visto simply connects to your WIFI network using the free to download app.

## WI-FI VIDEO DOORBELL - 1 Button with keypad

KITVISTO

Visto kit with doorbell - WI-FI monitor - PSU

KITVISTO/C

Visto kit with doorbell - chime - WI-FI monitor - PSU

### SPARES & ACCESSORIES

6742W

WI-FI MONITOR


12V-1A-PSU

Replacement keypad for Lite GSM

### GET THE APP



### TECHNICAL INFO:

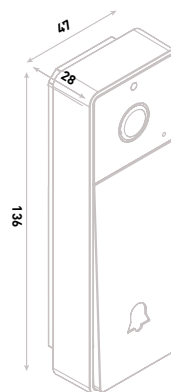

Dimensions in: mm

### COMELIT SERIES SURFACE MOUNT WI-FI VIDEO DOORBELL / INTERCOM

ELECTRICAL DATA		VISTO
POWER SUPPLY		12-24V AC/DC
ABSORPTION		8W MAX
OUTDOOR STATION - SPEAKER, CAMERA & CODELOCK UNIT		
CAMERA		170 VIEWING ANGLE H.264 ENCODING
RELAYS		RELAY (C, NO) 1A @30VDC
CALL BUTTONS		1
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP54
WORKING TEMP (°C MIN/MAX)		-25 - +55
MOUNTING		SURFACE



## AES PRIME7 SURFACE MOUNT GSM INTERCOM

**AES PRIME7** (without keypad) audio GSM intercom for unlimited range access control. The unit makes calls from a SIM card just like a mobile phone when the call button is pressed. It calls the numbers programmed into it, allowing the user to speak to whoever is at their door or gate regardless of whether they're at home or on the other side of the world. You are then able to remotely let that person in via the phone keypad.

High quality and stylish curved architectural model, with a brushed stainless steel construction and gloss acrylic trim. The housing also features an illuminated push button and modern blue back lighting effect.



### SURFACE MOUNT GSM INTERCOM - 1 Button


PRIME7-AB-4GE-EU	Black - GSM - curved architectural model - blue back lighting effect - with antenna
PRIME7-AS-4GE-EU	Silver - GSM - curved architectural model - blue back lighting effect - with antenna
PRIME7-IB-4GE-EU	Black - GSM - imperial model - blue back lighting effect - with antenna
<b>SPARES &amp; ACCESSORIES</b>	
PRIME7AB-PCB/4GE	PRIME7 4G PCB for EU
PRIME-KP-B-KIT	PRIME replacement keypad - blue
PRIME-KP-W-KIT	PRIME replacement keypad - white

### TECHNICAL INFO:


### GET THE APP



AB &amp; AS

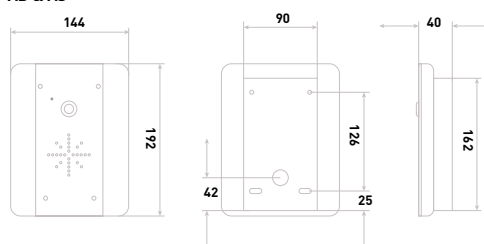

IB

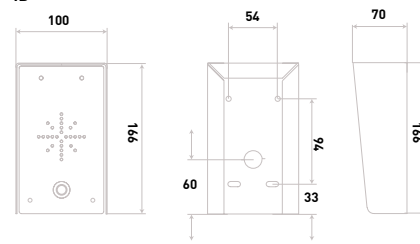

**FLUSH MOUNT  
OPTION ALSO  
AVAILABLE**

Speak with our sales team  
for more information on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**

**CLICK & COLLECT  
START SAVING  
TODAY**

- REGISTER ONLINE  
- PLACE AN ORDER  
- COLLECT

Visit  
**www.rollingcenter.co.uk**

Dimensions in: mm

AES PRIME7 GSM INTERCOM	
PRIME7-AB / AS / IB	
<b>ELECTRICAL DATA</b>	
INPUT	230VAC
OUTPUT	24V AC/DC (24VDC 2A ADAPTOR INCLUDED)
CURRENT	300MA ON DIAL OUT, 2A PEAK DEMAND
RELAY LOAD	2A 24V AC MAX
RELAY TYPE	N/C & N/O
RELAYS	2
DIAL OUT NUMBERS	4
PERMANENT CODES/CARDS	250
CALLER ID NUMBERS	250
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
PROTECTION LEVEL (IP)	SPEECH UNIT IP55
MOUNTING	SURFACE



## SURFACE MOUNT GSM INTERCOM - 1 Button with keypad

PRIME7-ABK-4GE-EU	Black - GSM - curved architectural model - blue back lighting effect - with antenna
PRIME7-ASK-4GE-EU	Silver - GSM - curved architectural model - blue back lighting effect - with antenna
PRIME7-IBK-4GE-EU	Black - GSM - imperial model - blue back lighting effect - with antenna
<b>SPARES &amp; ACCESSORIES</b>	
PRIME7AB-PCB/4GE	PRIME7 4G PCB for EU
PRIME-KP-B-KIT	PRIME replacement keypad - blue
PRIME-KP-W-KIT	PRIME replacement keypad - white

## AES PRIME7 SURFACE MOUNT GSM INTERCOM WITH KEYPAD


**AES PRIME7** (with keypad) audio GSM intercom for unlimited range access control. The unit makes calls from a SIM card just like a mobile phone when the call button is pressed. It calls the numbers programmed into it, allowing the user to speak to whoever is at their door or gate regardless of whether they're at home or on the other side of the world. You are then able to remotely let that person in via the phone keypad.

High quality and stylish curved architectural model, with a brushed stainless steel construction and gloss acrylic trim. The housing also features an illuminated push button and modern blue back lighting effect.

### GET THE APP



### TECHNICAL INFO:

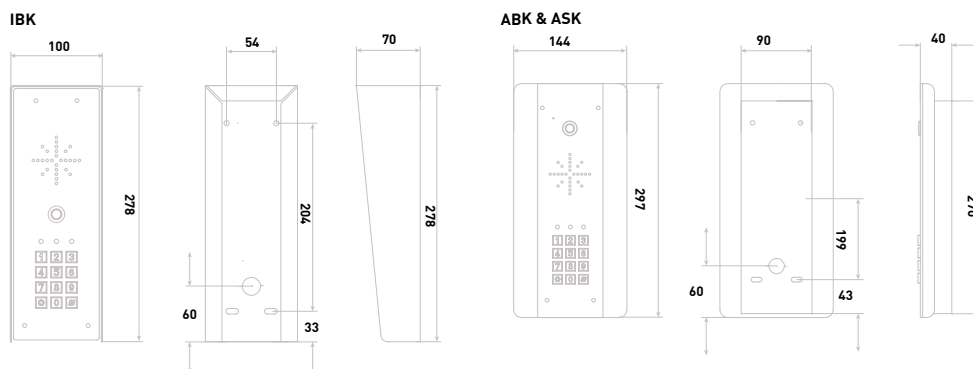

Dimensions in: mm

#### AES PRIME7 GSM INTERCOM WITH KEYPAD

ELECTRICAL DATA		PRIME7-ABK / ASK / IBK
INPUT		230VAC
OUTPUT		24V AC/DC (24VDC 2A ADAPTOR INCLUDED)
CURRENT		300MA ON DIAL OUT, 2A PEAK DEMAND
RELAY LOAD		2A 24V AC MAX
RELAY TYPE		N/C & N/O
RELAYS		2
DIAL OUT NUMBERS		4
PERMANENT CODES/CARDS		250
CALLER ID NUMBERS		250
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL (IP)		SPEECH UNIT IP55
MOUNTING		SURFACE

### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team for more information on 0113 201 6677 or email [Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)

### NEED ACCESS CONTROL SOLUTIONS?

See page **83** for details



## AES PRAETORIAN SURFACE MOUNT GSM VIDEO INTERCOM

The **PRAE-4G** (without keypad) panel is available in 3 styles: Black curved architectural model, stainless steel curved architectural model and the Black shrouded imperial model. (Kit includes speech panel, 4G modem, power supply and install manual).

The intercom comes complete with 4G access point. The access point will provide an internet connection via a compatible SIM card. Speak to your visitors from anywhere in the world via your mobile phone.

The **MON11** monitor can also work along side the Praetorian Guard as an extra screen for your home. It can be wall or desk mounted and comes with pre-loaded Praetorian app.




### SURFACE MOUNT GSM VIDEO INTERCOM - 1 Button

PRAE-4G-AB-EU	Black - video GSM - curved architectural model - blue back lighting effect - with 4G modem
PRAE-4G-AS-EU	Silver - video GSM - curved architectural model - blue back lighting effect - with 4G modem
PRAE-4G-IB-EU	Black - video GSM - imperial model - blue back lighting effect - with 4G modem
<b>SPARES &amp; ACCESSORIES</b>	
MON-11	10.1" wall/desk mount touch screen monitor - preloaded with Praetorian app
PRIME7AB-PCB/4GE	PRIME7 4G PCB for EU
PRIME-KP-B-KIT	PRIME replacement keypad - blue
PRIME-KP-W-KIT	PRIME replacement keypad - white

### TECHNICAL INFO:

### GET THE APP

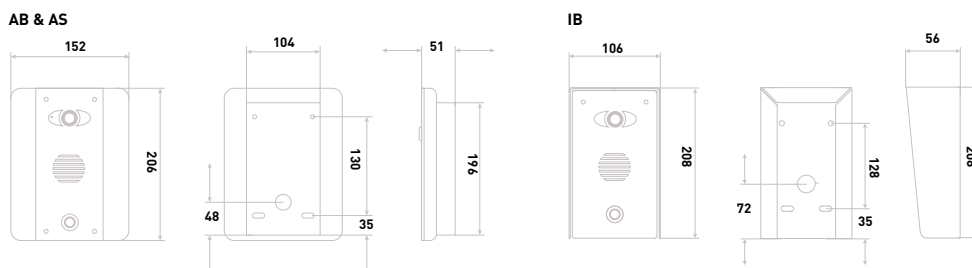

**FLUSH MOUNT  
OPTION ALSO  
AVAILABLE**

Speak with our sales team  
for more information on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**

**BENINCA SLIDING  
GATE  
AUTOMATION**

See page **15**

Dimensions in: mm		AES PRAETORIAN 4G GSM VIDEO INTERCOM	
ELECTRICAL DATA		PRAE-4G-AB / IB / AS	
INPUT		230VAC	
OUTPUT		24VDC	
CURRENT		80MA STANDBY - 300MA MAX	
CONSTRUCTION		MARINE STAINLESS & POWDER COATED ALUMINIUM	
RELAYS / KEYPAD RELAYS		2X BISTABLE LATCHING RELAYS 1A @1-28V AC/DC MAX	
4G ROUTER			
POWER SUPPLY		24VDC	
ANTENNA TYPE		SMA	
GSM MODEM MODELS		4G EUROPE - SIM7600E	
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL		IP55	
OPERATING TEMP (°C MIN/MAX)		-25 - +55	
MOUNTING		SURFACE	



## SURFACE MOUNT GSM VIDEO INTERCOM - 1 Button with keypad

PRAE-4G-ABK-EU	Black - video GSM - curved architectural model - blue back lighting effect - with 4G modem
PRAE-4G-ASK-EU	Silver - video GSM - curved architectural model - blue back lighting effect - with 4G modem
PRAE-4G-IBK-EU	Black - video GSM - imperial model - blue back lighting effect - with 4G modem

### SPARES & ACCESSORIES

MON-11	10.1" wall/desk mount touch screen monitor - preloaded with Praetorian app
PRIME7AB-PCB/4GE	PRIME7 4G PCB for EU
PRIME-KP-B-KIT	PRIME replacement keypad - blue
PRIME-KP-W-KIT	PRIME replacement keypad - white

## AES PRAETORIAN SURFACE MOUNT GSM VIDEO INTERCOM WITH KEYPAD

The **PRAE-4G** (with keypad) panel is available in 3 styles: Black curved architectural model, stainless steel curved architectural model and the Black shrouded imperial model. (Kit includes speech panel, 4G modem, power supply and install manual).


The intercom comes complete with 4G access point. The access point will provide an internet connection via a compatible SIM card. Speak to your visitors from anywhere in the world via your mobile phone.

The **MON11** monitor can also work along side the Praetorian Guard as an extra screen for your home. It can be wall or desk mounted and comes with pre-loaded Praetorian app.

### GET THE APP



### TECHNICAL INFO:

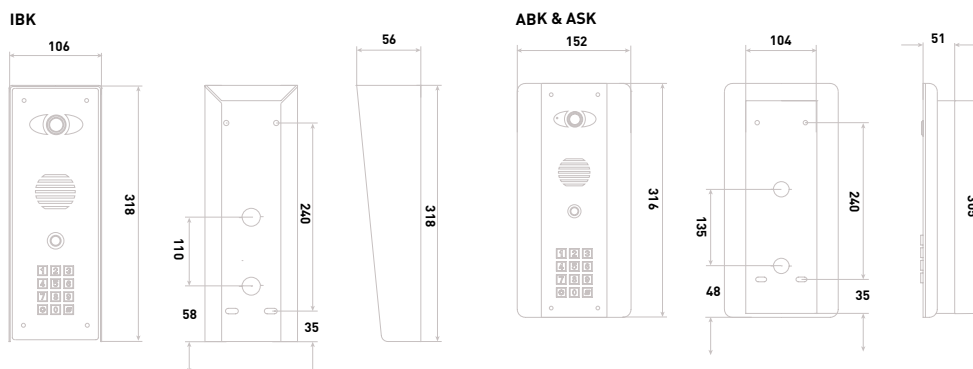

Dimensions in: mm

#### AES PRAETORIAN 4G GSM VIDEO INTERCOM WITH KEYPAD

ELECTRICAL DATA		PRAE-4G-ABK / IBK / ASK
INPUT		230VAC
OUTPUT		24VDC
CURRENT		80MA STANDBY - 300MA MAX
CONSTRUCTION		MARINE STAINLESS & POWDER COATED ALUMINIUM
RELAYS / KEYPAD RELAYS		2X BISTABLE LATCHING RELAYS 1A @1-28V AC/DC MAX
4G ROUTER		
POWER SUPPLY		24VDC
ANTENNA TYPE		SMA
GSM MODEM MODELS		4G EUROPE - SIM7600E
DIMENSIONAL & GENERAL DATA		
PROTECTION LEVEL		IP55
OPERATING TEMP (°C MIN/MAX)		-25 - +55
MOUNTING		SURFACE

### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team for more information on 0113 201 6677 or email [Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)

### BENINCA DU.IT UNDERGROUND AUTOMATION KITS



Turn to page **26**



## VIDEX IP 4000 SERIES SURFACE MOUNT GSM INTERCOM

The **IPVK IP** intercoms (without keypad) **4000** series IPure system videokit has been designed for communication via a Local Area Network (LAN). Communication over the internet can also be achieved with the use of tablets or smartphones running the VIDEX Cloudnected mobile app.


The IPure videokit is available as flush or surface 1 button kits. They include a 3.5" colour touch screen videophone with handset, a 4000 series audio/video IP entry panel and 12Vdc PSU.



### SURFACE MOUNT IP VIDEO INTERCOM - 1 - 2 Button

IPVK-1S/M	4000 series IP video - 1 button - IP video intercom - matt finish - 6296 3.5" videophone
IPVK-2S/M	4000 series IP video - 2 button - IP video intercom - matt finish - 6296 3.5" videophone
<b>SPARES &amp; ACCESSORIES</b>	
6296	6200 series colour videophone - 3.5" LCD monitor - with handset
6798	6700 series colour videophone - 7" LCD monitor - hands free
4881	1 module 4000 series surface mount back-box - gun metal grey
4533X-1/M	Speaker, camera & call button module - 4000 series - 1 call button - matt finish
4533X-1/BL	Speaker, camera & call button module - 4000 series - 1 call button - gun metal grey finish
HDR 15-12	Switched mode 12V DC 1.25Ah power supply
2505	IPure IP relay module & CloudBox
955/T	EM4002 format proximity tag 125khz

### TECHNICAL INFO:

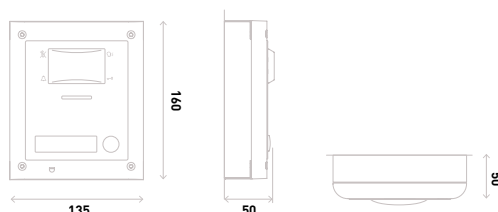

Wide camera  
standard

### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team  
for more information on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**

### ROLLING CENTER WHATSAPP TECHNICAL

Scan  
the  
QR  
code  
for  
instant  
help



Dimensions in: mm		VIDEX 4000 SERIES SURFACE MOUNT IP VIDEO INTERCOM	
ELECTRICAL DATA		IPVK-1S/M	IPVK-2S/M
INPUT		230VAC	
OUTPUT		12VDC	
OUTDOOR STATION - SPEAKER & CODELOCK UNIT			
CAMERA		WIDE ANGLE COLOUR CAMERA WITH WHITE LIGHT ILLUMINATION LEDs	
SPEECH UNIT RELAY		2X BUILT-IN VOLT FREERELAYS (C, NO, NC OR CAPACITOR DISCHARGE)	
CALL BUTTONS		1	2
DIMENSIONAL & GENERAL DATA			
PROTECTION LEVEL		FOR EXTERNAL USE	
MOUNTING		SURFACE	





## VIDEX IP 4000 SERIES SURFACE MOUNT GSM INTERCOM WITH KEYPAD

The **IPVKC IP** intercoms (with keypad) **4000** series IPure system videokit has been designed for communication via a Local Area Network (LAN). Communication over the internet can also be achieved with the use of tablets or smartphones running the VINDEX Cloudconnected mobile app.

The IPure videokit is available as flush or surface 1 button kits. They include a 3.5" colour touch screen videophone with handset, a 4000 series audio/video IP entry panel and 12Vdc PSU.

### SURFACE MOUNT IP VIDEO INTERCOM - 1 - 2 Button with keypad

IPVKC-1S/M	4000 series IP video - 1 button - IP video intercom - matt finish - 6296 3.5" videophone with keypad
IPVKC-1S/BL	4000 series IP video - 2 button - IP video intercom - matt finish - 6296 3.5" videophone with keypad

#### SPARES & ACCESSORIES

6296	6200 series colour videophone - 3.5" LCD monitor - with handset
6798	6700 series colour videophone - 7" LCD monitor - hands free
4882	2 module 4000 series surface mount back-box - gun metal grey
4901/M	4000 series keypad module - backlit buttons - matt finish
4901/BL	4000 series keypad module - backlit buttons - gun metal grey finish
4533X-1/M	Speaker, camera & call button module - 4000 series - 1 call button - matt finish
4533X-1/BL	Speaker, camera & call button module - 4000 series - 1 call button - gun metal grey finish
HDR 15-12	Switched mode 12V DC 1.25Ah power supply
2505	IPure IP relay module & CloudBox
955/T	EM4002 format proximity tag 125khz


#### TECHNICAL INFO:



IP


Codelock  
unit


Intercom.

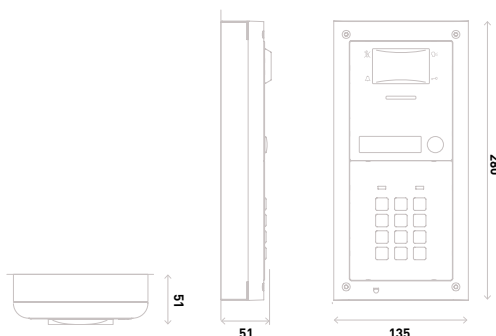
Wide camera  
standard


#### FLUSH MOUNT OPTION ALSO AVAILABLE

Speak with our sales team for more information on 0113 201 6677 or email [info@rollingcenter.co.uk](mailto:info@rollingcenter.co.uk)

**WE STOCK A WIDE  
RANGE OF ASO  
SAFETY  
PRODUCTS  
WE SUPPLY MADE  
TO MEASURE EDGES  
& COMPONENTS AT  
COMPETITIVE  
PRICES**

Please get in touch with your requirements.

Dimensions in: mm

#### VIDEX 4000 SERIES SURFACE MOUNT IP VIDEO INTERCOM WITH KEYPAD

ELECTRICAL DATA	
INPUT	230VAC
OUTPUT	12VDC
OUTDOOR STATION - SPEAKER &	
CAMERA	WIDE ANGLE COLOUR CAMERA WITH WHITE LIGHT ILLUMINATION LEDS
SPEECH UNIT RELAY	2X BUILT-IN VOLT FREERELAYS (C, NO, NC OR CAPACITOR DISCHARGE)
KEYPAD RELAYS	3
CALL BUTTONS	1 2
CODES	3
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	FOR EXTERNAL USE
MOUNTING	SURFACE

# '22

2022 TRADE CATALOGUE

GATE HARDWARE  
GATE AUTOMATION  
ACCESS CONTROL  
GATE SAFETY  
ALUMINIUM GATES



**TEL.** 0113 201 6677

# SECTION E

# LOCKS & CLOSERS

SWING GATE LOCKS	144
SWING INSERT GATE LOCKS	148
SLIDING GATE LOCKS	150
SWING MECHANICAL CODE GATE LOCKS	152
SLIDING MECHANICAL CODE GATE LOCKS	154
SWING MECHANICAL LOCKS	155
MAGNETIC LOCKS	158
ELECTRIC LOCKS	164
ELECTRIC DROP BOLTS	165
MANUAL DROP BOLTS	166
HEAVY DUTY ELECTRIC DROP BOLTS	168
HYDRAULIC GATE CLOSERS	169
GAS GATE CLOSERS	177



## LOCINOX LAPQ / LAKQ BLACK INDUSTRIAL SWING GATE LOCKS

High quality **surface mount** gate lock with aluminium housing and stainless steel mechanism. We advise this lock as a standard for all your industrial gates.

The **20mm** continuous adjustability of the bolts ensures a perfect latching / locking mechanism. A solid stainless steel deadbolt with a **23mm** throw guarantees a secure lock.

Standard supplied with anodized **(3006M)** aluminium handle pair. For a fast and highly precise installation.




### BLACK INDUSTRIAL GATE LOCKS - For 10 - 60mm box section

9/01	LAPQ 1010 U2L 9005 VSZ M - Aluminium handles - 10 - 30mm flat bar - 54mm barrel
9/02	LAKQ 3030 U2L 9005 VSZ M - Aluminium handles - 30 - 50mm box section - 54mm barrel
9/03	LAKQ 4040 U2L 9005 VSZ M - Aluminium handles - 40 - 60mm box section - 54mm barrel

### SPARES & ACCESSORIES

LOCICYL54	3012-54-STD-VSZ - 54mm keyed alike euro cylinder
3006B	Pair black anodised aluminium handle - 66.5 x 8 x 8mm follower
3006D	Pair curved edge anodised aluminium handle - 60 x 8 x 8mm follower
3006FA	Pair ornate black powder coated aluminium handle - 65 x 8 x 8mm follower
3006M	Pair square edge anodised aluminium handle - 60 x 8 x 8mm follower
SAKL9005QF2	Black adjustable keep - 40mm + box section
SHKL9005QF2K	Black adjustable security keep - 40-60mm box section
MODULEC-SA	Surface mounted electric strike - 12-24v ac/dc
SHROUD-LA	Security shroud for surface mounted locks with free exit configuration
3006PUSH	Push handle set for free opening in aluminium

### TECHNICAL INFO:

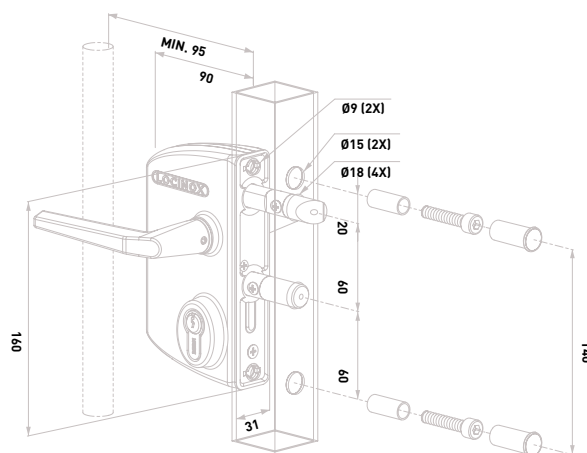

### ROLLING CENTER CAVO FALL PROTECTION CABLES



Turn to page **70**

LOCINOX INDUSTRIAL GATE LOCKS
SPECIFICATION
ISO 9227 KTL / E-COATED LOCK BOX WITHSTANDS 1000 HOURS OF SALT SPRAY TEST
EASY LEFT OR RIGHT CHANGING OF THE SELF-LATCHING DAYBOLT
23 MM THROW OF THE DEAD BOLT, IN 1 TURN OF THE KEY
KEY-OPERATED SELF-LATCHING BOLT
4-HOLE FIXING WITH TWO HEXAGON SOCKET HEAD SCREWS
60 MM CENTER DISTANCE OF THE BOLTS
CONTINUOUS ADJUSTMENT OF THE DAYBOLT UP TO 20 MM WITHOUT DISMOUNTING THE LOCK BOX
STAINLESS STEEL MECHANISM



## LOCINOX LAPQ BLACK INDUSTRIAL SWING GATE LOCK

High quality **surface mount** gate lock with aluminium housing and stainless steel mechanism. We advise this lock as a standard for all your industrial gates.

The **20mm** continuous adjustability of the bolts ensures a perfect latching / locking of the mechanism. A solid stainless steel deadbolt with a **23mm** throw guarantee a secure locking.

Standard supplied with black powder coated decorative **(3006FA)** aluminium handle pair. For a fast and highly precise installation.



### BLACK INDUSTRIAL GATE LOCKS - For 10 - 60mm box section

9/18	LAPQ 1010 U2L 9005 VSZ FA - Ornate handles - 10 - 30mm flat bar - 54mm barrel
9/17	LAKQ 3030 U2L 9005 VSZ FA - Ornate handles - 30 - 50mm box section - 54mm barrel
9/03A	LAKQ 4040 U2L 9005 VSZ FA - Ornate handles - 40 - 60mm box section - 54mm barrel

#### SPARES & ACCESSORIES

LOCICYL54	3012-54-STD-VSZ - 54mm keyed alike euro cylinder
3006B	Pair black anodised aluminium handle - 66.5 x 8 x 8mm follower
3006D	Pair curved edge anodised aluminium handle - 60 x 8 x 8mm follower
3006FA	Pair ornate black powder coated aluminium handle - 65 x 8 x 8mm follower
3006M	Pair square edge anodised aluminium handle - 60 x 8 x 8mm follower
SAKL9005QF2	Black adjustable keep - 40mm + box section
SHKL9005QF2K	Black adjustable security keep - 40-60mm box section
MODULEC-SA	Surface mounted electric strike - 12-24v ac/dc
SHROUD-LA	Security shroud for surface mounted locks with free exit configuration
3006PUSH	Push handle set for free opening in aluminium

#### TECHNICAL INFO:

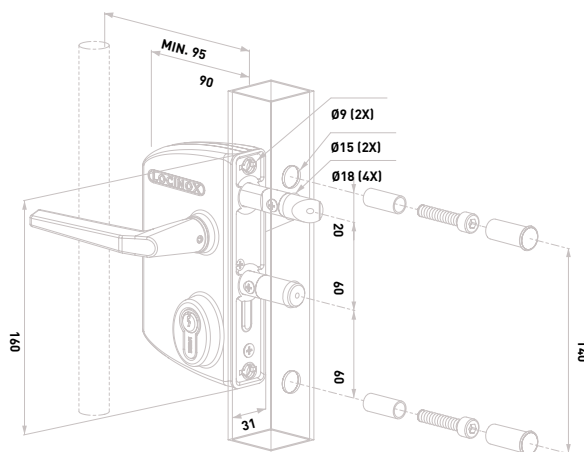

Dimensions in: mm

#### LOCINOX INDUSTRIAL GATE LOCKS

##### SPECIFICATION

ISO 9227 KTL / E-COATED LOCK BOX WITHSTANDS 1000 HOURS OF SALT SPRAY TEST
EASY LEFT OR RIGHT CHANGING OF THE SELF-LATCHING DAYBOLT
23 MM THROW OF THE DEAD BOLT, IN 1 TURN OF THE KEY
KEY-OPERATED SELF-LATCHING BOLT
4-HOLE FIXING WITH TWO HEXAGON SOCKET HEAD SCREWS
60 MM CENTER DISTANCE OF THE BOLTS
CONTINUOUS ADJUSTMENT OF THE DAYBOLT UP TO 20 MM WITHOUT DISMOUNTING THE LOCK BOX
STAINLESS STEEL MECHANISM

#### FOR SWING GATE HINGES

See page **180** for details



## LOCINOX LAKY SMALL BLACK ORNATE SWING GATE LOCK

Quality ornamental **surface mount** lock with aluminium housing and stainless steel mechanism. We advise this lock as a standard for all your ornamental gates.

The **10mm** continuous adjustability of the bolts ensures a perfect latching / locking mechanism. A solid stainless steel deadbolt with a **23mm** throw guarantees a secure lock.


Standard supplied with black powder coated decorative **(3006FA)** aluminium handle pair. For a fast and highly precise installation.



### SMALL BLACK ORNATE GATE LOCKS - For 10 - 60mm box section

9/01B	LAKY 1010 F2L 9005 VCA FA - Ornate handles - 10 - 30mm flat bar - 46mm barrel
9/04	LAKY 3030 F2L 9005 VCA FA - Ornate handles - 30 - 50mm box section - 46mm barrel
9/05	LAKY 4040 F2L 9005 VCA FA - Ornate handles - 40 - 60mm box section - 46mm barrel
<b>SPARES &amp; ACCESSORIES</b>	
LOCICYL46	46mm keyed alike euro cylinder
3006B	Pair black anodised aluminium handle - 66.5 x 8 x 8mm follower
3006D	Pair curved edge anodised aluminium handle - 60 x 8 x 8mm follower
3006FA	Pair ornate black powder coated aluminium handle - 65 x 8 x 8mm follower
SAKL9005QF2	Black adjustable keep - 40mm + box section
SHKL9005QF2K	Black adjustable security keep - 40-60mm box section
MODULEC-SA	Surface mounted electric strike - 12-24v ac/dc
SHROUD-LA	Security shroud for surface mounted locks with free exit configuration
3006PUSH	Push handle set for free opening in aluminium

### TECHNICAL INFO:

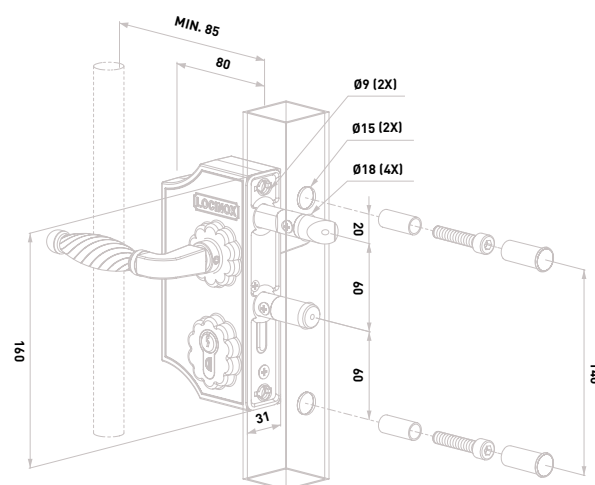

### NEED ASSISTANCE WITH CHOOSING THE RIGHT KIT?

Call us on  
**0113 201 6677** our friendly  
team are here to help.

Dimensions in: mm

#### LOCINOX SMALL ORNATE GATE LOCKS

##### SPECIFICATION

ISO 9227 KTL / E-COATED LOCK BOX WITHSTANDS 1000 HOURS OF SALT SPRAY TEST
EASY LEFT OR RIGHT CHANGING OF THE SELF-LATCHING DAYBOLT
23 MM THROW OF THE DEAD BOLT, IN 1 TURN OF THE KEY
CONTINUOUS ADJUSTMENT OF 10 MM FOR THE BOLTS WITHOUT REMOVING THE LOCK
KEY-OPERATED SELF-LATCHING BOLT
4-HOLE FIXING WITH TWO HEXAGON SOCKET HEAD SCREWS
60 MM CENTER DISTANCE OF THE BOLTS



## LOCINOX LAKQ LARGE BLACK ORNATE SWING GATE LOCK

Excellent ornamental **surface mount** lock with aluminium housing and stainless steel mechanism. We advise this lock as a standard for all your ornamental gates.

The **20mm** continuous adjustability of the bolts ensures a perfect aligned locking mechanism. A solid stainless steel deadbolt with a **23mm** throw guarantees a secure lock.

Standard supplied with black powder coated decorative **(3006FA)** aluminium handle pair. For a fast and highly precise installation.


### LARGE BLACK ORNATE GATE LOCKS - For 10 - 60mm box section

9/01A	LAPQ 1010 H2L 9005 VSZ FA - Ornate handles - 10 - 30mm flat bar - 46mm barrel
9/04A	LAKQ 3030 H2L 9005 VSZ FA - Ornate handles - 30 - 50mm box section - 46mm barrel
9/05A	LAKQ 4040 H2L 9005 VSZ FA - Ornate handles - 40 - 60mm box section - 46mm barrel

### SPARES & ACCESSORIES

LOCICYL54	3012-54-STD-VSZ - 54mm keyed alike euro cylinder
3006B	Pair black anodised aluminium handle - 66.5 x 8 x 8mm follower
3006D	Pair curved edge anodised aluminium handle - 60 x 8 x 8mm follower
3006FA	Pair ornate black powder coated aluminium handle - 65 x 8 x 8mm follower
SAKL9005QF2	Black adjustable keep - 40mm + box section
SHKL9005QF2K	Black adjustable security keep - 40-60mm box section
MODULEC-SA	Surface mounted electric strike - 12-24v ac/dc
SHROUD-LA	Security shroud for surface mounted locks with free exit configuration
3006PUSH	Push handle set for free opening in aluminium

### TECHNICAL INFO:

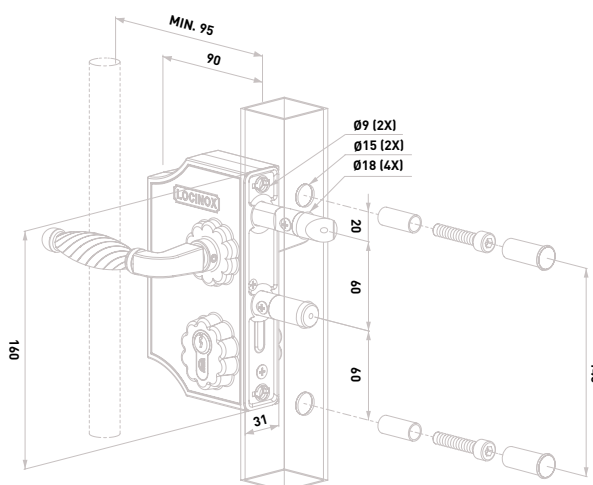

Dimensions in: mm

#### LOCINOX LARGE ORNATE GATE LOCKS

##### SPECIFICATION

ISO 9227 KTL / E-COATED LOCK BOX WITHSTANDS 1000 HOURS OF SALT SPRAY TEST  
EASY LEFT OR RIGHT CHANGING OF THE SELF-LATCHING DAYBOLT  
23 MM THROW OF THE DEAD BOLT, IN 1 TURN OF THE KEY  
CONTINUOUS ADJUSTMENT OF 20 MM FOR THE BOLTS WITHOUT REMOVING THE LOCK  
KEY-OPERATED SELF-LATCHING BOLT  
4-HOLE FIXING WITH TWO HEXAGON SOCKET HEAD SCREWS  
60 MM CENTER DISTANCE OF THE BOLTS

## LOCINOX ELECTRADROP ELECTRIC DROP BOLT



Turn to page **165**



## LOCINOX FORTYLOCK 40MM INSERT GATE LOCK SET

- 1 x **FORTYLOCK** Insert lock
- 1 x **SFKI QF4D** Insert stainless steel keep
- 2 x **3020-HYB-ALU-ZILV** Cover shields
- 1 x **3006M-H** Aluminium handles
- 1 x **3012-54-STD-VSZ** Euro cylinder

Insert lock with 100% stainless steel mechanism. The stainless steel adjustable self-latching bolt and hook combined with the keep guarantee a solidly closed gate where the gate wings can not be pulled apart or forced open.

The lock can be installed on metal, aluminium and PVC gates. Thanks to the patented "Click-It" system, installing the lock can be done in a matter of seconds.



### FORTYLOCK INSERT GATE LOCK - 20mm backset for 40mm + box section


FORTYSET-40I-MA

Insert lock set - 20mm backset - 40mm+ box section - 54mm barrel

#### SPARES & ACCESSORIES

FORTYLOCK	Insert lock - 40mm+ box section
LOCICYL54	<b>3012-54-STD-VSZ</b> - 54mm keyed alike euro cylinder
3006B-H	Pair black anodised aluminium handle - 120 x 8 x 8mm follower
3006J-H	Pair aluminium handle - 120 x 8 x 8mm follower - anti-bump
3006M-H	Pair aluminium handle - 120 x 8 x 8mm follower
SFKM	Stainless steel surface mount keep
SFKI	Insert stainless steel mount keep
MODULEC-SF	Surface mounted electric strike - 12-24v ac/dc
3020-HYB-STD	Polyamide cover shields for insert locks
3020-HYB-ALU-ZILV	Silver - aluminium cover shields for insert locks
3020-HYB-ALU-9005	Black - aluminium cover shields for insert locks

#### TECHNICAL INFO:

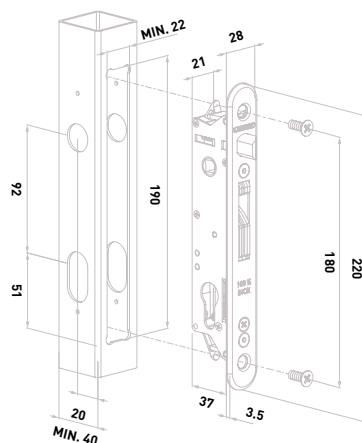

**LOOKING FOR  
SWING GATE  
HARDWARE  
EQUIPMENT?**

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)  
or call **0113 201 6677** for  
more information.

Dimensions in: mm

#### LOCINOX FORTYSET GATE INSERT LOCK SET

##### SPECIFICATION

LOCK MECHANISM WITH COVER PLATE AGAINST DIRT PENETRATION
PATENTED "CLICK-IT" SYSTEM MAKES THREAD TAPPING UNNECESSARY
CONTINUOUS ADJUSTMENT OF THE DAYBOLT UP TO 10 MM WITHOUT DISMOUNTING THE LOCK BOX
KEY-OPERATED SELF-LATCHING BOLT
MECHANISM, HOOK, FRONTPLATE, LATCHBOLT: STAINLESS STEEL
EASY LEFT OR RIGHT CHANGING OF THE SELF-LATCHING DAYBOLT
THROW OF THE HOOK: 21 MM
CENTER-DISTANCE CYLINDER <=> HANDLES = 92 MM
OPTIONAL: COVER SHIELD FOR HANDLE & CYLINDER HOLES IN ALUMINIUM, POLYAMIDE OR STAINLESS STEEL





## FIFTYLOCK INSERT GATE LOCKS - 30mm backset for 50mm + box section

FIFTYSET-50M-JA

Insert lock set - 30mm backset - 50mm+ box section - 54mm barrel

### SPARES & ACCESSORIES

FIFTYLOCK	Insert lock - 40mm+ box section
LOCICYL54	3012-54-STD-VSZ - 54mm keyed alike euro cylinder
3006B-H	Pair black anodised aluminium handle - 120 x 8 x 8mm follower
3006J-H	Pair aluminium handle - 120 x 8 x 8mm follower - anti-bump
3006M-H	Pair aluminium handle - 120 x 8 x 8mm follower
SFKM	Stainless steel surface mount keep
SFKI	Insert stainless steel mount keep
MODULEC-SF	Surface mounted electric strike - 12-24v ac/dc
3020-HYB-STD	Polyamide cover shields for insert locks
3020-HYB-ALU-ZILV	Silver - aluminium cover shields for insert locks
3020-HYB-ALU-9005	Black - aluminium cover shields for insert locks


## LOCINOX FIFTYLOCK 50MM INSERT GATE LOCK SET

- 1 x FIFTYLOCK Insert lock
- 1 x SFKM ALUM Insert stainless steel keep
- 1 x 3020-HYB-ALU-ZILV Cover shields
- 1 x 3006J-H Aluminium handles
- 1 x 3012-54-STD-VSZ Euro cylinder

Prime insert lock with 100% stainless steel mechanism. The stainless steel adjustable self-latching bolt and hook combined with the keep guarantee a solidly closed gate where the gate wings can not be pulled apart or forced open.

The lock can be installed on metal, aluminium and PVC gates. Thanks to the patented "Click-It" system the lock is mounted in seconds.

### TECHNICAL INFO:

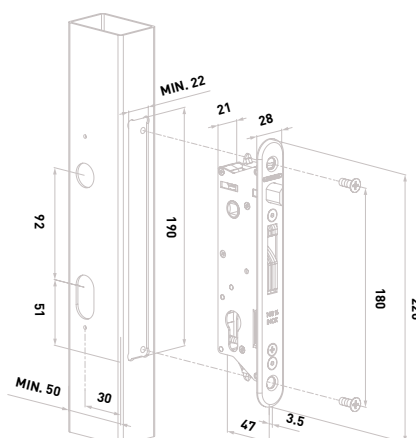

Dimensions in: mm

### LOCINOX FIFTY GATE INSERT LOCK SET

#### SPECIFICATION

- STAINLESS STEEL LOCK MECHANISM WITH COVER PLATE AGAINST DIRT PENETRATION
- MECHANISM, HOOK, FRONTPLATE, LATCHBOLT: STAINLESS STEEL
- BACKSET 30 MM, FOR MOUNTING IN PROFILES OF 50 MM DEPTH OR MORE
- CONTINUOUS ADJUSTMENT OF THE DAYBOLT UP TO 10 MM WITHOUT DISMOUNTING THE LOCK BOX
- KEY-OPERATED SELF-LATCHING BOLT
- EASY LEFT OR RIGHT CHANGING OF THE SELF-LATCHING DAYBOLT
- THROW OF THE HOOK: 21 MM
- CENTER-DISTANCE CYLINDER <=> HANDLES = 92 MM
- OPTIONAL: COVER SHIELD FOR HANDLE & CYLINDER HOLES IN ALUMINIUM, POLYAMIDE OR STAINLESS STEEL

### NICE O-VIEW GATE AUTOMATION PROGRAMMING UNIT



Turn to page 109



LOCINOX  
LSKZ  
SILVER INDUSTRIAL  
SLIDING GATE LOCK

First-grade **surface mount** lock for manual sliding gates with aluminium housing and stainless steel mechanism.


The unique Twistfinger and conforming self-correcting keep guarantees a perfectly aligned closure. For a fast and highly precise installation



INDUSTRIAL SILVER SLIDING GATE LOCKS - 40 - 100mm box section

LSKZ40	LSKZ 4040 U2L ZILV VSZ S - aluminium handles - 40mm box section - 54mm barrel
LSKZ50	LSKZ 5050 U2L ZILV VSZ S - aluminium handles - 50mm box section - 54mm barrel
LSKZ60	LSKZ 6060 U2L ZILV VSZ S - aluminium handles - 60mm box section - 54mm barrel
LSKZ80	LSKZ 8080 U2L ZILV VSZ S - aluminium handles - 80mm box section - 54mm barrel
LSKZ100	LSKZ 100100 U2L ZILV VSZ S - aluminium handles - 100mm box section - 54mm barrel
SPARES & ACCESSORIES	
LOCICYL54	3012-54-STD-VSZ - 54mm keyed alike euro cylinder
3006S	Pair reinforced aluminium handle - 60 x 10 x 10mm follower
SSKZ-QF	Sliding gate keep

TECHNICAL INFO:

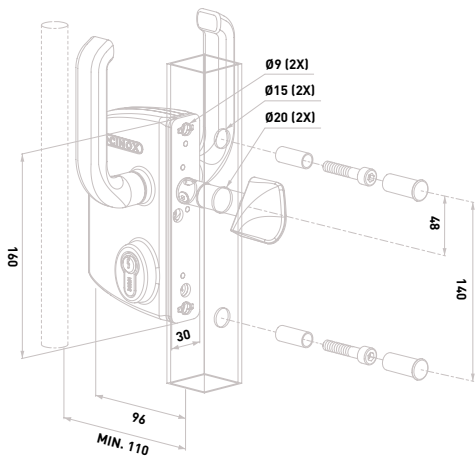

NEED MAGNETIC  
LOCKS?

See page **158** for details

Dimensions in: mm

LOCINOX LSKZ SLIDING GATE LOCK

SPECIFICATION

ISO 9227 KTL / E-COATED LOCK BOX WITHSTANDS 1000 HOURS OF SALT SPRAY TEST
MECHANISM AND TWISTFINGER IN STAINLESS STEEL
ADJUSTABLE FOR HORIZONTAL OR VERTICAL MOUNTING OF THE KEEP (CATCH BOLT)
FIXING WITH 2 HEXAGON SOCKET HEAD SCREWS
INNOVATIVE CLOSING SYSTEM
STAINLESS STEEL COLLAR AROUND THE TWISTFINGER PREVENTS CUTTING THROUGH THE TWISTFINGER (CATCHBOLT)
STANDARD WITH REINFORCED ALUMINIUM HANDLE PAIR
3006S: SQUARE 10 MM FOLLOWER



## LOCINOX LSKZ BLACK INDUSTRIAL SLIDING GATE LOCK

First-grade **surface mount** lock for manual sliding gates with aluminium housing and stainless steel mechanism.

The unique Twistfinger and conforming self-correcting keep guarantees a perfectly aligned closure. For a fast and highly precise installation


### SILVER INDUSTRIAL SLIDING GATE LOCKS - 40 - 50mm box section

LSKZ40-9005	LSKZ 4040 U2L 9005 VSZ S - Aluminium handles - 40mm box section - 54mm barrel
LSKZ50-9005	LSKZ 5050 U2L 9005 VSZ S - Aluminium handles - 50mm box section - 54mm barrel
LSKZ60-9005	LSKZ 6060 U2L 9005 VSZ S - Aluminium handles - 60mm box section - 54mm barrel
LSKZ80-9005	LSKZ 8080 U2L 9005 VSZ S - Aluminium handles - 80mm box section - 54mm barrel
LSKZ100-9005	LSKZ1 00100 U2L 9005 VSZ S - Aluminium handles - 100mm box section - 54mm barrel

#### SPARES & ACCESSORIES

LOCICYL54	3012-54-STD-VSZ - 54mm keyed alike euro cylinder
3006S	Pair reinforced aluminium handle - 60 x 10 x 10mm follower
SSKZ-QF	Sliding gate keep

#### TECHNICAL INFO:

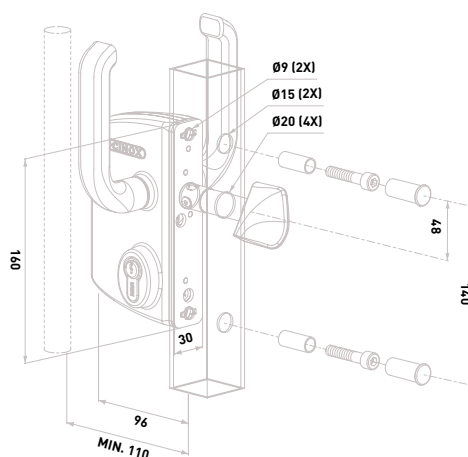

Dimensions in: mm

#### LOCINOX LSKZ SLIDING GATE LOCK

##### SPECIFICATION

ISO 9227 KTL / E-COATED LOCK BOX WITHSTANDS 1000 HOURS OF SALT SPRAY TEST

MECHANISM AND TWISTFINGER IN STAINLESS STEEL

ADJUSTABLE FOR HORIZONTAL OR VERTICAL MOUNTING OF THE KEEP (CATCH BOLT)

FIXING WITH 2 HEXAGON SOCKET HEAD SCREWS

INNOVATIVE CLOSING SYSTEM

STAINLESS STEEL COLLAR AROUND THE TWISTFINGER PREVENTS CUTTING THROUGH THE TWISTFINGER (CATCHBOLT)

STANDARD WITH REINFORCED ALUMINIUM HANDLE PAIR

3006S: SQUARE 10 MM FOLLOWER

#### NICE ROBUS KIT 1 UP TO 600KG SLIDING GATE AUTOMATION



Turn to page **12**

**LOCINOX**  
**VINCI**  
DOUBLE SIDED SWING  
MECHANICAL CODE GATE LOCK

High quality **surface mount** mechanical code lock with aluminium housing and stainless steel mechanism.

The Vinci requires no batteries or electricity which makes it very easy to equip any gate with access control. The **20mm** continuous adjustability of the bolts allows a perfect latching / locking mechanism.


A solid stainless steel deadbolt with a **23mm** throw guarantees a secure lock. For a fast and highly precise installation.



## VINCI SWING MECHANICAL CODE GATE LOCKS - 40mm box section

VINCI DOUBLE	LMKQ 4040 V2L ZILV VSZC - Silver - double sided mechanical code lock - for 40mm box section
VINCI DOUBLE BLACK	LMKQ 4040 V2L 9005 VSZC - Black - double sided mechanical code lock - for 40mm box section
<b>SPARES &amp; ACCESSORIES</b>	
LOCICYL54	54mm keyed alike euro cylinder
3006C	Pair anodised aluminium handle - 60 x 8 x 8mm follower
3006I	Pair anodised aluminium handle - 65 x 8 x 8mm follower - anti-bump
3006D	Pair anodised aluminium handle - 60 x 8 x 8mm follower
SAKL90050F2	Black adjustable keep - 40mm + box section
SHKL90050F2K	Black adjustable security keep - 40-60mm box section
3006PUSH	Push handle set for free opening in aluminium
SHROUD-LA	Security shroud for surface mount locks - for use with free exit only

### TECHNICAL INFO:

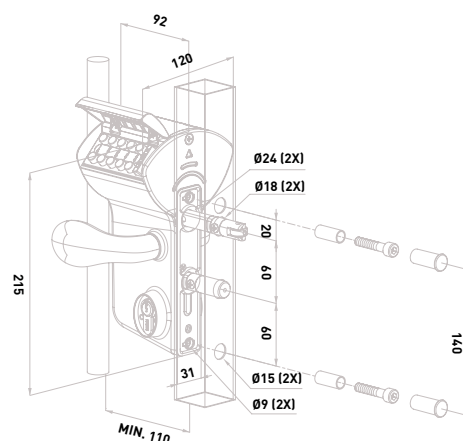

## ROLLING CENTER WHATSAPP TECHNICAL

Scan the QR code for instant help



Dimensions in: <b>mm</b>	<b>LOCINOX LMKQ MECHANICAL CODE GATE LOCK</b>
	<b>SPECIFICATION</b>
	ISO 9227 KTL / E-COATED LOCK BOX WITHSTANDS 1000 HOURS OF SALT SPRAY TEST
	MECHANICAL CODE PANEL ON BOTH SIDES
	POSSIBILITY TO WORK WITH DIFFERENT ENTRANCE AND EXIT CODES
	POLYAMIDE RAIN AND DUST COVER
	EASY AND FAST SET-UP OR MODIFICATION OF THE ACCESS CODES
	WITH ADJUSTABLE ROLLERBOLT FOR EASY CLOSING
	EXTREMELY STRONG AND USER-FRIENDLY MECHANISM
	AUTOMATIC CODE RESET AFTER PUSHING THE HANDLE
	ANTI-CODE DETECTION WITH INTEGRATED SECURITY PRESS PLATE
	INTERCHANGEABLE WITH ALL LOCINOX LOCKS



### LFKQ VINCI SWING MECHANICAL CODE GATE LOCKS - 40mm box section

VINCI	LFKQ 4040 X1L ZILV CR - Silver - single mechanical code lock - free exit - for 40mm box section
VINCI BLACK	LFKQ 4040 X1L 9005 CR - Black - single mechanical code lock - free exit - for 40mm box section
<b>SPARES &amp; ACCESSORIES</b>	
LOCICYL54	Spare 54mm keyed alike euro cylinder
PUSHBAR-L	Push bar in aluminium for surface mounted gate locks
3006PUSH	Push handle set in aluminium
SHROUD-LF	Security shroud for free exit mechanical lock
SHKL9005QF2K	Black adjustable keep - 40mm + box section
SHKL-QF	Black adjustable security keep - 40-60mm box section
3006PUSH	Push handle set for free opening in aluminium
SHROUD-LA	Security shroud for surface mount locks - for use with free exit only



### LOCINOX FREE VINCI SINGLE SIDED SWING MECHANICAL CODE GATE LOCK

Superb **surface mount** mechanical code lock with aluminium housing and stainless steel mechanism.

The Free Vinci offers you the possibility to secure one side with a code for the entrance while leaving the other side free for exit. No batteries nor electricity are required, which makes it very easy to equip any gate with access control. The **20mm** continuous adjustability of the bolt ensures a perfect latching / locking mechanism.

For ornamental and chain link gates. For a fast and highly precise installation

### TECHNICAL INFO:

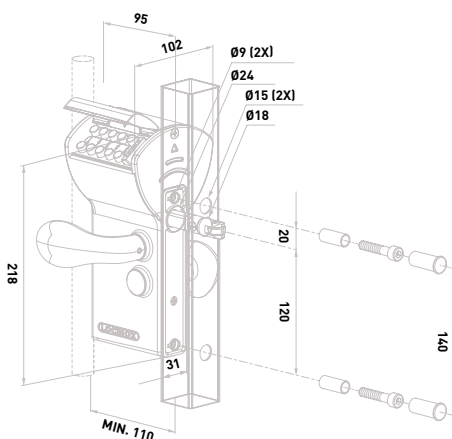

### OTHER BOX SECTION SIZES AVAILABLE.

Speak with our sales team for more information on  
0113 201 6677 or email  
[Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)

Dimensions in: mm

#### LOCINOX LFKQ MECHANICAL GATE LOCK WITH FREE ENTRY

##### SPECIFICATION

ISO 9227 KTL / E-COATED LOCK BOX WITHSTANDS 1000 HOURS OF SALT SPRAY TEST
ENTRANCE SECURED BY CODE, FREE EXIT
CODE PANEL WITH STAINLESS STEEL PUSH BUTTONS ON ONE SIDE
POLYAMIDE RAIN AND DUST COVER
EASY AND FAST SET-UP OR MODIFICATION OF THE ACCESS CODE
WITH ADJUSTABLE ROLLERBOLT FOR EASY CLOSING
EXTREMELY STRONG AND USER-FRIENDLY MECHANISM
AUTOMATIC CODE RESET AFTER PUSHING THE HANDLE
ANTI-CODE DETECTION WITH INTEGRATED SECURITY PRESS PLATE
INTERCHANGEABLE WITH ALL LOCINOX LOCKS

### WE HAVE A FULL RANGE OF ACCESS CONTROL SOLUTIONS AVAILABLE AT COMPETITIVE PRICES

If you don't see what you're looking for call us on  
0113 201 6677 or email  
[Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)



LOCINOX  
LEONARDO  
DOUBLE SIDED SLIDING  
MECHANICAL CODE GATE LOCK

High quality **surface mount** mechanical code lock for sliding gates with aluminium housing and stainless steel mechanism.

Since no electricity nor batteries are required, the mechanical code lock gives you the opportunity to easily equip any sliding gate with access control.


The unique Twistfinger and conforming auto-correcting keep guarantees a perfect closing of your sliding gate.



LEONARDO SLIDING MECHANICAL CODE GATE LOCKS - 40mm box section

LLKZ	LLKZ 4040 V2L ZILV VSZC - Silver - double sided mechanical code lock - for 40mm box section
LLKZ 9005	LLKZ 4040 V2L 9005 VSZC - Black - double sided mechanical code lock - for 40mm box section
SPARES & ACCESSORIES	
LOCICYL54	Spare 54mm keyed alike euro cylinder
SSKZ-QF	Black adjustable keep
3006C	Pair anodised aluminium handle - 60 x 8 x 8mm follower


TECHNICAL INFO:

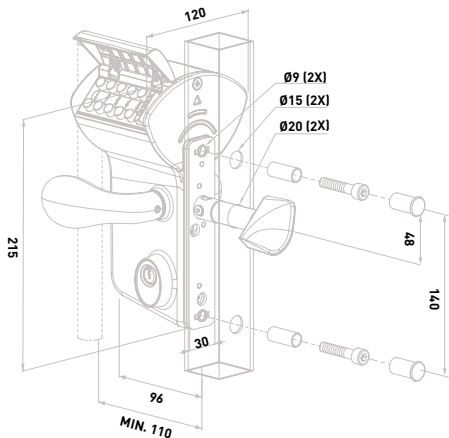

OTHER BOX  
SECTION SIZES  
AVAILABLE.

Speak with our sales team  
for more information on  
0113 201 6677 or email  
Info@rollingcenter.co.uk

ROLLING CENTER  
CANTILEVER  
GATE KITS



Turn to page 216

LOCINOX LLKZ SLIDING MECHANICAL CODE GATE LOCK
SPECIFICATION
100% MECHANICAL: NO BATTERY NOR ELECTRICITY REQUIRED
ADJUSTABLE FOR HORIZONTAL OR VERTICAL MOUNTING OF THE KEEP (CATCH BOLT)
MECHANICAL CODE PANEL ON BOTH SIDES
POSSIBILITY TO WORK WITH DIFFERENT ENTRANCE AND EXIT CODES
EQUIPPED WITH DUST AND RAIN COVERS
EASY AND FAST SET-UP OR MODIFICATION OF THE ACCESS CODES
POSSIBILITY OF SETTING UP 4 TO 6 DIGIT CODES
EXTREMELY STRONG AND USER-FRIENDLY MECHANISM
AUTOMATIC CODE RESET AFTER PUSHING THE HANDLE
ANTI-CODE DETECTION WITH INTEGRATED SECURITY PRESS PLATE


**3100 MECHANICAL CODE GATE LOCK WITH 65 - 80MM LATCH & KEY OVERRIDE**
**BL3100 DKO ECP**

Black marine grade - with keypad - inside paddle handle - knob turn - easy code reset

**BL3130 DKO ECP**

Black marine grade - back to back keypads - knob turn - easy code reset


**3100 MECHANICAL CODE GATE LOCK WITH 65 - 80MM LATCH**
**BL3100 ECP**

Black marine grade - with keypad - inside paddle handle - knob turn - easy code reset

**BL3130 ECP**

Black marine grade - back to back keypads - knob turn - easy code reset

**BORG  
BL3100  
SWING MECHANICAL  
CODE GATE LOCK**

**BL3100DKO ECP / BL3130DKO ECP** Comes with a knob turn keypad or back to back keypads and anti-climb housing, with **key override**. This allows entry with a separate key and offers a deadbolt function as standard. With On the door code change method.

**BL3100 ECP / BL3130 ECP** Comes with a knob turn keypad or back to back keypads and anti-climb housing. With On the door code change method.


**3400 MECHANICAL CODE GATE LOCK WITH 65 - 80MM LATCH & KEY OVERRIDE**
**BL3400 DKO ECP**

Black marine grade - with keypad - inside lever handle - easy code reset

**BL3430 DKO ECP**

Black marine grade - back to back keypads - lever turn handles - easy code reset


**3400 MECHANICAL CODE GATE LOCK WITH 65 - 80MM LATCH**
**BL3400 ECP**

Black marine grade - with keypad - inside lever handle - easy code reset

**BL3430 ECP**

Black marine grade - back to back keypads - lever turn handles - easy code reset

**BORG  
BL3400  
SWING MECHANICAL  
CODE GATE LOCK**

**BL3400DKO ECP / BL3430DKO ECP** Comes with a lever turn keypad or back to back keypads and anti-climb housing, with **key override**. This allows entry with a separate key and offers a deadbolt function as standard. With On the door code change method.

**BL3400 ECP / BL3430 ECP** Comes with a lever turn keypad or back to back keypads and anti-climb housing. With On the door code change method.



## BORG BL2021 SWING MECHANICAL CODE GATE LOCK FOR INTERNAL DOORS

**BL2021 / BL2021 ECP** Comes with back to back keypads and 60mm anti-thrust tubular latch with thumb turn handles and on the door code change method. Satin chrome finish

NEW



### 2021 MECHANICAL CODE GATE LOCKS WITH 60MM TUBULAR LATCH

BL2021

Satin chrome finish - back to back keypads - thumb turn handle

BL2021 ECP

Satin chrome finish - back to back keypads - thumb turn handle - easy code reset

## BORG BL2201 SWING MECHANICAL CODE GATE LOCK FOR INTERNAL DOORS

**BL2201 / BL2201 ECP** Comes with keypad with thumb turn handles and inside lever handle, 60mm anti-thrust tubular latch with holdback function and on the door code change method. Satin chrome finish.

NEW



### 2021 MECHANICAL CODE GATE LOCKS WITH 60MM TUBULAR LATCH & HOLDBACK FUNCTION

BL2201

Satin chrome finish - with keypad - thumb turn handle - inside lever handle

BL2201 ECP

Satin chrome finish - with keypad - thumb turn handle - inside lever handle - easy code reset

## BORG BL2001 SWING MECHANICAL CODE GATE LOCK FOR INTERNAL DOORS

**BL2001 / BL2001 ECP** Comes with keypad with thumb turn handles and inside lever handle, 60mm anti-thrust tubular latch and on the door code change method. Satin chrome finish.

NEW



### 2001 MECHANICAL CODE GATE LOCKS WITH TUBULAR LATCH - 60mm latch

BL2001

Satin chrome finish - with keypad - thumb turn handle - inside lever handle

BL2001 ECP

Satin chrome finish - with keypad - thumb turn handle - inside lever handle - easy code reset

## BORG BL2621 SWING MECHANICAL CODE GATE LOCK FOR EXTERNAL DOORS

**BL2621 / BL2621 ECP** Comes with back to back keypads and 60mm anti-thrust tubular latch with knurled thumb turn handles and on the door code change method. Marine grade black finish.

NEW



### 2621 MECHANICAL CODE GATE LOCKS WITH 60MM TUBULAR LATCH

BL2621

Black marine grade - back to back keypads - knurled thumb turn handle

BL2621 ECP

Black marine grade - back to back keypads - knurled thumb turn handle - easy code reset




**NEW**

**BORG  
BL5400**  
SWING MECHANICAL  
CODE GATE LOCK FOR  
INTERNAL & EXTERNAL  
DOORS

**BL5400 / BL5400 ECP** Comes with a keypad with flat bar handles on both sides, no latch mechanism, with on the door code change method. Satin chrome finish.

### 5400 MECHANICAL CODE GATE LOCKS WITH NO LATCH MECHANISM

BL5400	Satin chrome finish - with keypad - flat bar handles - no latch mechanism
BL5400 ECP	Satin chrome finish - with keypad - flat bar handles - no latch mechanism - easy code reset


**NEW**

**BORG  
BL5402**  
SWING MECHANICAL  
CODE GATE LOCK FOR  
INTERNAL & EXTERNAL  
DOORS

**BL5402 / BL5402 ECP** Comes with a keypad with flat bar handles on both sides, a 28mm latch mechanism with on the door code change method. Satin chrome finish.

### 5402 MECHANICAL CODE GATE LOCKS WITH 28MM ALUMINIUM LATCH

BL5402	Satin chrome finish - with keypad - flat bar handles
BL5402 ECP	Satin chrome finish - with keypad - flat bar handles - easy code reset


**NEW**

**BORG  
BL5403**  
SWING MECHANICAL  
CODE GATE LOCK FOR  
INTERNAL & EXTERNAL  
DOORS

**BL5403 / BL5403 ECP** Comes with a keypad with flat bar handles on both sides, a 60x72mm mortice lock with on the door code change method. Satin chrome finish.

### 5403 MECHANICAL CODE GATE LOCKS WITH 60 X 72MM MORTICE LOCK

BL5403	Satin chrome finish - with keypad - flat bar handles
BL5403 ECP	Satin chrome finish - with keypad - flat bar handles - easy code reset


**NEW**

**BORG  
BL5408**  
SWING MECHANICAL  
CODE GATE LOCK FOR  
INTERNAL & EXTERNAL  
DOORS

**BL5408 / BL5408 ECP** Comes with a keypad with flat bar handle and a push pad release with on the door code change method. Satin chrome finish.

### 5408 MECHANICAL CODE GATE LOCKS WITH PUSH PAD

BL5408	Satin chrome finish - with keypad - flat bar handle - push pad
BL5408 ECP	Satin chrome finish - with keypad - flat bar handle - push pad - easy code reset



## ROLLING CENTER SL-180 SURFACE MOUNT INTERNAL MAGNETIC GATE LOCK

The **SL-180** is a surface mount **internal** maglock with a holding force of up to **180kg**.

Fail safe (power to lock)  
electromagnetic lock suitable for  
internal doors. Anti-rust surface  
enhancement for additional durability.

For use with any access control  
products with built-in surge absorber  
to prevent any interference to the  
reader. Low power consumption with  
high efficiency, noise free.



### MAGNETIC GATE LOCKS - Holding force 150kg

SL-180	Magnetic lock - 12-24vdc - internal use
<b>SPARES &amp; ACCESSORIES</b>	
BR-180/AL	L-bracket for armature only
BR-180/BL	L-bracket for lock only
12V 1A PSU	12vdc 1a inline encapsulated power supply unit - thermal overload protected
VHLR	Very handy little relay - universal relay - 12-24v ac/dc - double pole

ROLLING CENTER SL-180 MAGLOCK	
ELECTRICAL DATA	
LOCK STATUS SENSOR	C, NO OUTPUT 0.25MA (READ SWITCH)
POWER SUPPLY	12/24VDC
OPERATING CURRENT	380mA @ 12VDC - 190mA @ 24VDC
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	INTERNAL USE ONLY
WORKING TEMP (°C MIN/MAX)	-5 - +40
DIMENSIONS LOCK (MM)	164.5 X 40.2 X 22.5
DIMENSIONS ARMATUER PLATE (MM)	140 X 32 X 10.5



## ROLLING CENTER GL-200 SURFACE MOUNT EXTERNAL MAGNETIC GATE LOCK

The **GL-200** is a surface mount **external** maglock with a holding force of up to **250kg**.

Fail safe (power to lock)  
electromagnetic lock suitable for  
external swing out / in doors. Anti-rust  
surface enhancement for additional  
durability.

For use with any access control  
products with built-in surge absorber  
to prevent any interference to the  
reader. Low power consumption with  
high efficiency, noise free with instant  
demagnetiser when power is off.



### MAGNETIC GATE LOCKS - Holding force 250kg

GL-200	Magnetic lock - 12-24vdc - external use
<b>SPARES &amp; ACCESSORIES</b>	
BR-200GL	L-bracket for sliding configuration
BR-200GZ	Z & L-bracket for swing configuration
12V 1A PSU	12vdc 1a inline encapsulated power supply unit - thermal overload protected
VHLR	Very handy little relay - universal relay - 12-24v ac/dc - double pole

ROLLING CENTER GL-200 MAGLOCK	
ELECTRICAL DATA	
LOCK STATUS SENSOR	C, NC OUTPUT 0.25MA (READ SWITCH)
POWER SUPPLY	12/24VDC
OPERATING CURRENT	420mA @ 12VDC / 210mA @ 24VDC
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP67
WORKING TEMP (°C MIN/MAX)	-10 - +70
DIMENSIONS LOCK (MM)	210 X 42 X 28.5
DIMENSIONS ARMATUER PLATE (MM)	185 X 38 X 12



## ROLLING CENTER GL-220 SURFACE MOUNT EXTERNAL MAGNETIC GATE LOCK

The **GL-220** is a surface mount **external** maglock with a holding force of up to **544kg**.

Fail safe (power to lock) electromagnetic lock suitable for internal doors. Anti-rust surface enhancement for additional durability.

For use with any access control with built-in surge absorber to prevent any interference to the reader. Low power consumption with high efficiency, noise free.

### MAGNETIC GATE LOCKS - Holding force 544kg

GL-220	Magnetic lock - 12-24vdc - external use
<b>SPARES &amp; ACCESSORIES</b>	
BR-220GL	L-bracket for sliding configuration
BR-220GZ	Z & L-bracket for swing configuration
12V 1A PSU	12vdc 1a inline encapsulated power supply unit - thermal overload protected
VHLR	Very handy little relay - universal relay - 12-24v ac/dc - double pole

ROLLING CENTER GL-220 MAGLOCK	
GL-220	
<b>ELECTRICAL DATA</b>	
LOCK STATUS SENSOR	C, NO OUTPUT 0.25MA (READ SWITCH)
POWER SUPPLY	12/24VDC
OPERATING CURRENT	460mA @ 12VDC - 260mA @ 24VDC
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
PROTECTION LEVEL	IP67
WORKING TEMP (°C MIN/MAX)	-10 - +70
DIMENSIONS LOCK (MM)	240 X 63.5 X 43
DIMENSIONS ARMATUER PLATE (MM)	185 X 61 X 16



## CDVI i180SR SURFACE MOUNT EXTERNAL MAGNETIC GATE LOCK

The **i180SR** is a monitored surface mount **external** maglock with a holding force of up to **180kg**.

It is part of the range of external electromagnetic locks from CDVI offering high performance flexible locking solutions in the most harsh environments.

### MAGNETIC GATE LOCKS - Holding force 180kg

i180SR	Surface magnetic lock - 12-24vdc - monitored - external use
<b>SPARES &amp; ACCESSORIES</b>	
12V 1A PSU	12vdc 1a inline encapsulated power supply unit - thermal overload protected
VHLR	Very handy little relay - universal relay - 12-24v ac/dc - double pole

CDVI i180SR MAGLOCK	
i180SR	
<b>ELECTRICAL DATA</b>	
LOCK STATUS SENSOR	C, NO, NC
POWER SUPPLY	12/24VDC
OPERATING CURRENT	550mA @ 12VDC - 275mA @ 24VDC
<b>DIMENSIONAL &amp; GENERAL DATA</b>	
PROTECTION LEVEL	IP54
WORKING TEMP (°C MIN/MAX)	-40 - +60
DIMENSIONS LOCK (MM)	175 X 33 X 24

**NEED ACCESS  
CONTROL  
SOLUTIONS?**

See page **83** for details



## CDVI i400SR SURFACE MOUNT EXTERNAL MAGNETIC GATE LOCK

The **i400SR** is a monitored surface mount **external** maglock with a holding force of up to **400kg**.

It is part of the range of external electromagnetic locks from CDVI offering high performance flexible locking solutions in the most harsh environments.



### SURFACE MOUNT MAGNETIC GATE LOCKS - Holding force 400kg

i400SR	Surface magnetic lock - 12-24vdc - monitored - external use
<b>SPARES &amp; ACCESSORIES</b>	
ESL-400	L-bracket for sliding configuration
ES-Z	Z & L-bracket for swing configuration
12V 1A PSU	12v dc 1a inline encapsulated power supply unit - thermal overload protected
VHLR	Very handy little relay - universal relay - 12-24v ac/dc - double pole

CDVI i400SR MAGLOCK	
ELECTRICAL DATA	
LOCK STATUS SENSOR	C, NO, NC
POWER SUPPLY	12/24VDC
OPERATING CURRENT	550mA @ 12VDC - 275mA @ 24VDC
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP54
WORKING TEMP (°C MIN/MAX)	-40 - +60
DIMENSIONS LOCK (MM)	230 X 43 X 30



## CDVI i500SR SURFACE MOUNT EXTERNAL MAGNETIC GATE LOCK

The **i500SR** is a monitored surface mount **external** maglock with a holding force of up to **500kg**.

It is part of the range of external electromagnetic locks from CDVI offering high performance flexible locking solutions in the most harsh environments.



### SURFACE MOUNT MAGNETIC GATE LOCKS - Holding force 500kg

i500SR	Surface magnetic lock - 12-24vdc - monitored - external use
<b>SPARES &amp; ACCESSORIES</b>	
ESL-500	L-bracket for sliding configuration
ES-Z	Z & L-bracket for swing configuration
12V 1A PSU	12v dc 1a inline encapsulated power supply unit - thermal overload protected
VHLR	Very handy little relay - universal relay - 12-24v ac/dc - double pole

CDVI i500SR MAGLOCK	
ELECTRICAL DATA	
LOCK STATUS SENSOR	C, NO, NC
POWER SUPPLY	12/24VDC
OPERATING CURRENT	550mA @ 12VDC - 275mA @ 24VDC
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP54
WORKING TEMP (°C MIN/MAX)	-40 - +60
DIMENSIONS LOCK (MM)	230 X 61 X 40



### FLUSH MOUNT MAGNETIC GATE LOCKS - Holding force 300kg

V3ER

Mortice magnetic lock - 12-24vdc - 12-24vdc - monitored - internal use

#### SPARES & ACCESSORIES

12V 1A PSU

12vdc 1a inline encapsulated power supply unit - thermal overload protected

VHLR

Very handy little relay - universal relay - 12-24v ac/dc - double pole

CDVI V3ER MAGLOCK	
ELECTRICAL DATA	
LOCK STATUS SENSOR	C, NO, NC
POWER SUPPLY	12/24VDC
OPERATING CURRENT	550mA @ 12VDC / 275mA @ 24VDC
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP42
WORKING TEMP (°C MIN/MAX)	-40 - +60
DIMENSIONS LOCK (MM)	228 X 39 X 27



### CDVI V3ER FLUSH MOUNT INTERNAL MORTICE MAGNETIC GATE LOCK

The **internal** range of mortice magnets from CDVI offers high performance in many different environments.

The **V3ER** is a popular mortice magnetic lock with a holding force of **300kg**. It is used within the B0-Series of profiled housings and transoms.

Thanks to its multi-fix features and its slimmer profile, it is ideal for many applications including installation at point of door manufacture.

The unit is 12/24Vdc selectable, and includes lock status monitoring as a standard.



### FLUSH MOUNT MAGNETIC GATE LOCKS - Holding force 400kg

V4ER

Mortice magnetic lock - 12-24vdc - 12-24vdc - monitored - internal use

#### SPARES & ACCESSORIES

12V 1A PSU

12v dc 1a inline encapsulated power supply unit - thermal overload protected

VHLR

Very handy little relay - universal relay - 12-24v ac/dc - double pole

CDVI V4ER MAGLOCK	
ELECTRICAL DATA	
LOCK STATUS SENSOR	C, NO, NC
POWER SUPPLY	12/24VDC
OPERATING CURRENT	550mA @ 12VDC - 275mA @ 24VDC
DIMENSIONAL & GENERAL DATA	
PROTECTION LEVEL	IP42
WORKING TEMP (°C MIN/MAX)	-40 - +60
DIMENSIONS LOCK (MM)	228 X 44 X 29.5



### CDVI V4ER FLUSH MOUNT INTERNAL MORTICE MAGNETIC GATE LOCK

The **internal** range of mortice magnets from CDVI offers high performance in many different environments.

The **V4ER** is a popular mortice magnetic lock with a holding force of **400kg**. It is used within the B0-Series of profiled housings and transoms.

Thanks to its multi-fix features and its slimmer profile, it is ideal for many applications including installation at point of door manufacture.

The unit is 12/24Vdc selectable, and includes lock status monitoring as a standard.



## LOCINOX MAG SURFACE MOUNTED MAGNETIC GATE LOCK

Screw-on electromagnetic lock for access control. Available in 2 versions.  
**MAG3000** with **300 kg** and  
**MAG6000** with **600 kg** holding force.

The aluminium powder coated housing with integrated design handles gives your access control gate that extra touch.


Stop losing precious time with welding boxes; drilling 7 holes does the job. The Quick-Fix enables a fast and strong fixing. A two layer, protective coating guarantees that our electromagnetic locks are ready for years of worry-free use outside.



### MAGNETIC GATE LOCKS - With integrated handles, pulling force 300 - 600kg

MAG3000-ZILV	Silver - 300kg - 12-24v dc - for box section 40 - 80mm - with handles
MAG3000-9005	Black - 300kg - 12-24v dc - for box section 40 - 80mm - with handles
MAG6000-ZILV	Silver - 600kg - 12-24v dc - for box section 40 - 80mm - with handles
MAG6000-9005	Black - 600kg - 12-24v dc - for box section 40 - 80mm - with handles
<b>SPARES &amp; ACCESSORIES</b>	
DC-POWER	24v 25w Locinox PSU
12V 1A PSU	12v dc 1a inline encapsulated power supply unit - thermal overload protected
VHLR	Very handy little relay - universal relay - 12-24v ac/dc - double pole

### TECHNICAL INFO:

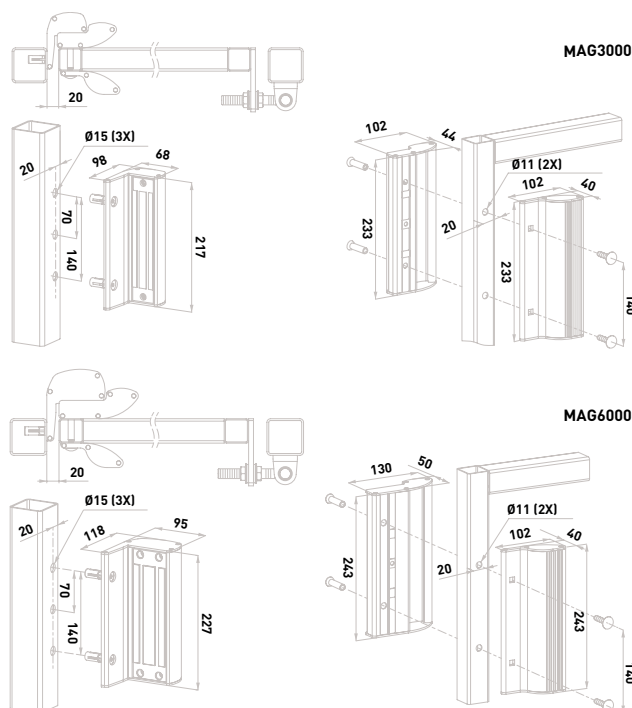

### VIDEX STANDALONE DIGITAL KEYPAD



Turn to page **84**

Dimensions in: mm

#### LOCINOX MAG 3000 / 6000 MAGNETIC GATE LOCK

ELECTRICAL DATA		MAG 3000/6000
POWER SUPPLY		12/24VDC
OPERATING CURRENT		(3000) 500mA @ 12VDC - 250mA @ 24VDC (6000) 460mA @ 12VDC - 230mA @ 24VDC
DIMENSIONAL & GENERAL DATA		
HOLDING FORCE (KG)		300 / 600
PROTECTION LEVEL		IP42
DEMAGNETISER		FAIL SAFE
WORKING TEMP (°C MIN/MAX)		-40 - +60



## LOCINOX MAG MAG SURFACE MOUNTED MAGNETIC GATE LOCK

Screw-on electromagnetic lock for access control. Available in 2 versions. **MAGMAG3000** with **300 kg** and **MAGMAG6000** with **600 kg** holding force.


The aluminium powder coated housing equipped with the unique Quick-Fix fixations ensures a fast and nicely finished mounting.

Eliminate time-consuming welding; drilling 5 holes is enough to fix the lock. A two layer, protective coating guarantees that our electromagnetic locks are ready for years of worry free use outside.

### MAGNETIC GATE LOCKS - Without integrated handles, pulling force 300 - 600kg

MAGMAG3000-ZILV	Silver - 300kg - 12-24v dc - for box section 40 - 80mm - without handles
MAGMAG3000-9005	Black - 300kg - 12-24v dc - for box section 40 - 80mm - without handles
MAGMAG6000-ZILV	Silver - 600kg - 12-24v dc - for box section 40 - 80mm - without handles
MAGMAG6000-9005	Black - 600kg - 12-24v dc - for box section 40 - 80mm - without handles
<b>SPARES &amp; ACCESSORIES</b>	
DC-POWER	24v 25w locinox PSU
12V 1A PSU	12v dc 1a inline encapsulated power supply unit - thermal overload protected
VHLR	Very handy little relay - universal relay - 12-24v ac/dc - double pole

### TECHNICAL INFO:

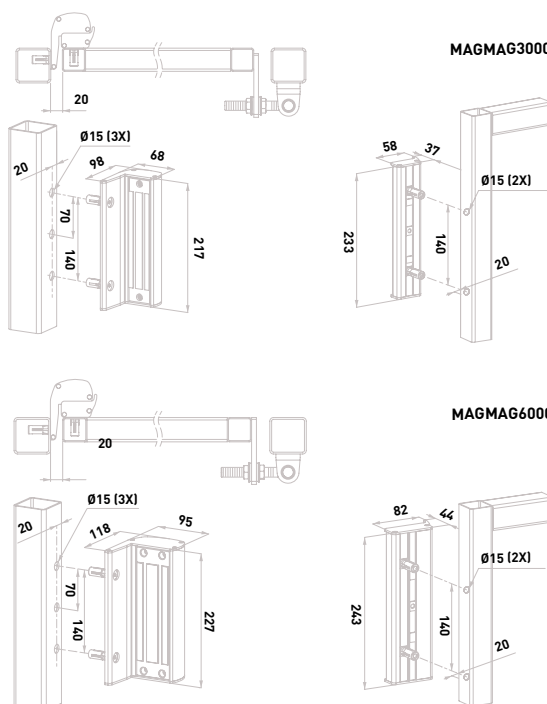

Dimensions in: mm	
LOCINOX MAGMAG 3000 / 6000 MAGNETIC GATE LOCK	
ELECTRICAL DATA	
POWER SUPPLY	12/24VDC
OPERATING CURRENT	(3000) 500mA @ 12VDC - 250mA @ 12VDC (6000) 460mA @ 12VDC - 230mA @ 24VDC
DIMENSIONAL & GENERAL DATA	
HOLDING FORCE (KG)	300 / 600
PROTECTION LEVEL	IP42
DEMAGNETISER	FAIL SAFE
WORKING TEMP (°C MIN/MAX)	-40 - +60

**FOR COMPOSITE  
GATE IN-FILL  
FENCING  
BOARDS**

See page **258** for details





## CISA ELECTRIKA GATE LOCK

**Cisa Electrika** 12V AC Lock is suitable for any type of door or gate. Innovative locking system, with a rotary hook deadbolt with a pull resistance of up to **2000Kg**. The protective steel case totally encloses the lock and striker providing resistance and protection. Fitted with a self-adjusting swinging-rod active both vertically and horizontally.



### ELECTRIC LOCK - Surface mount 12vac

CISA ELECTRIKA	Electric dead lock - 12vac - with key release - pulling force 2000kg
<b>SPARES &amp; ACCESSORIES</b>	
CA1R	12/24 vac transformer



## NICE PLA10 VERTICAL GATE LOCK

**PLA10** 12V vertical electric lock. Specially designed for installation on manual or automatic outside outward opening doors and drive-through gates. This type of opening is necessary when the door/gate is situated on a slope or when safety regulations foresee an outward-opening escape route in the event of an emergency.



### VERTICAL GATE LOCK - Surface mount 12vac

PLA10	Surface mount - 12vac - with key release - vertical type
<b>SPARES &amp; ACCESSORIES</b>	
CA1R	12/24 vac transformer



## NICE PLA11 HORIZONTAL GATE LOCK

**PLA11** 12V horizontal electric lock. Specially designed for installation on manual or automatic outside outward opening doors and drive-through gates. This type of opening is necessary when the door/gate is situated on a slope or when safety regulations foresee an outward-opening escape route in the event of an emergency.



### HORIZONTAL GATE LOCK - Surface mount 12vac

PLA11	Surface mount - 12vac - with key release - horizontal type
<b>SPARES &amp; ACCESSORIES</b>	
CA1R	12/24 vac transformer





## LOCINOX ELECTRADROP MOTORISED ELECTRIC DROP BOLT


Electric 24Vdc drop bolt with **115mm** throw for safe locking of automated swing gates.

By securing your gate with an Electradrop you dis-burden the electric gate motors.

### MOTORISED ELECTRIC DROP BOLT

ELECTRADROP ZILV	Silver - electric drop bolt - 24vdc - 115mm throw - vandal proof - manual key release
ELECTRADROP	Black - electric drop bolt - 24vdc - 115mm throw - vandal proof - manual key release
<b>SPARES &amp; ACCESSORIES</b>	
DC-POWER-24V	24vdc 25w locinox PSU
OGS	Off centre ground stop - strong ground stop for double leaves
SABO	Bolt-on off centre ground stop for drop bolts - maximum axle of Ø20mm
3012-37-STD-GSZ	37mm keyed alike half cylinder

### TECHNICAL INFO:

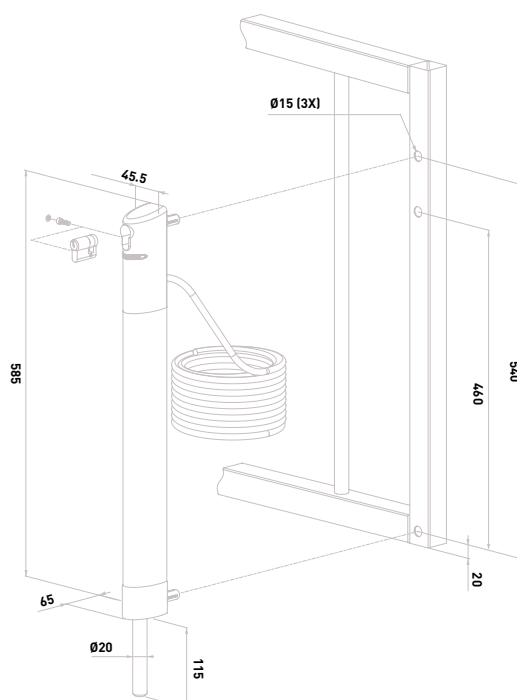

### KIT VERSION WITH GROUND STOP AND PSU AVAILABLE

Speak with our sales team for more information on 0113 201 6677 or email [Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)

### VIDEX 4G GSM INTERCOM WITH KEYPAD



Turn to page **130**

Dimensions in: mm

#### LOCINOX ELECTRADROP ELECTRIC DROP BOLT

##### SPECIFICATION

VANDAL-PROOF, POWDER COATED ALUMINIUM HOUSING

TO BE CONNECTED TO THE WARNING LIGHT ON AUTOMATED GATES (MIN 3 SEC PREWARNING SIGNAL) OR DIRECTLY ON THE GATE AUTOMATION

MECHANICAL RELEASE POSSIBLE (BY KEY) IN CASE OF EMERGENCY

THE INTEGRATED OBSTACLE DETECTION WILL AUTOMATICALLY STOP THE DROP BOLT MOVEMENT IN CASE OF OVERPRESSURE TO AVOID INJURIES.

CONSUMPTION: 25 W / STANDBY: 0.2 W

5 M CABLE INCLUDED - INCLUDED: 3012-37-STD CYLINDER

TO CONNECT TO A LOCINOX DC-POWER-24V-25W POWER SUPPLY



## LOCINOX KEYDROP MANUAL LOCKABLE DROP BOLT

The **Keydrop** is a lockable drop bolt, that can be locked in both the open and closed position. Available in 3 RAL colours this drop bolt is ideal for retro fitting to gate profiles of 40mm or more.


Looking to upgrade your drop bolt? This unit has the same drilling pattern as the **VSA** and **VSF** versions of drop bolt.



### MANUAL LOCKABLE DROP BOLT

KEYDROP	Silver - lockable drop bolt - 140mm throw - for 40mm box section
KEYDROPBLACK	Black 9005 - lockable drop bolt - 140mm throw - for 40mm box section
KEYDROPGREY	Grey 7016 - lockable drop bolt - 140mm throw - for 40mm box section
<b>SPARES &amp; ACCESSORIES</b>	
OGS	Off centre ground stop - strong ground stop for double leaves
SABO	Bolt-on off centre ground stop for drop bolts - maximum axle of Ø20mm
3012-37-STD-GSZ	37mm keyed alike half cylinder

### TECHNICAL INFO:

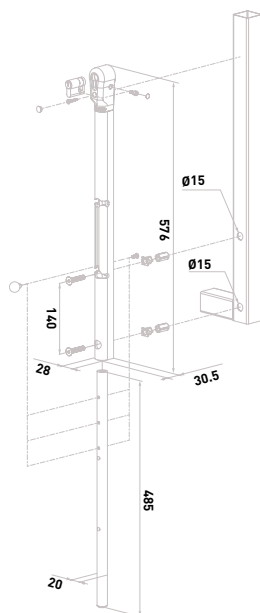

**LOOKING FOR  
SWING GATE  
HARDWARE  
EQUIPMENT?**

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)  
or call **0113 201 6677** for  
more information.

Dimensions in: mm

#### LOCINOX KEYDROP MANUAL DROP BOLT

##### SPECIFICATION

THROW: 140 MM

LOCKABLE DROP BOLT WITH CYLINDER

SAME DRILLING PATTERN AS VSF AND VSA

POSSIBILITY TO WORK WITH SAME KEY AS GATE LOCK

HEIGHT ADJUSTABILITY OF THE DROP BOLT: 100 MM - HEIGHT ADJUSTABILITY IN 3 POSITIONS: 50 MM /POSITION

THE GATE CAN BE LOCKED IN OPEN OR CLOSED POSITION

FOR GATE PROFILES 40X40 MM OR MORE



### SURFACE MOUNTED MANUAL DROP BOLT

VSA K QF1BL ZILV	Silver - 140mm throw - 40mm box section - aluminium pin
VSA K QF1BL 9005	Black - 140mm throw - 40mm box section - aluminium pin
VSA K QF1BL 7016	Anthracite - 140mm throw - 40mm box section - aluminium pin
VSF	Silver - 40mm throw - 40mm box section - hot-dip pin
VSF BLACK	Black 9005 - 140mm throw - 40mm box section - hot-dip pin
VSF GREY	Anthracite 7016 - 140mm throw - 40mm box section - hot-dip pin
<b>SPARES &amp; ACCESSORIES</b>	
OGS	Off centre ground stop - strong ground stop for double leaves
SABO	Bolt-on off centre ground stop for drop bolts - maximum axle of Ø20mm
EGS	Economic ground catcher for drop bolts - maximum axle of Ø20mm

### LOCINOX VSF / VSA SURFACE MOUNTED MANUAL DROP BOLT


The Locinox **VSF/VSA** is a manual drop bolt, ideal when looking to add an additional locking mechanism to your gate.

The **VSF** has a **140mm** throw and **100mm** height adjustability, for gate profiles for **40x40mm** plus. This drop bolt has an aluminium casing and a hot dip galvanised bolt.

The **VSA** has a **140mm** throw and **100mm** height adjustability, for gate profiles for **40x40mm** plus. This drop bolt has an aluminium casing and a bolt.

Fixed using the Quick-Fix expanding bolts the drop bolt is auto-locked between the gates after closing.

### TECHNICAL INFO:

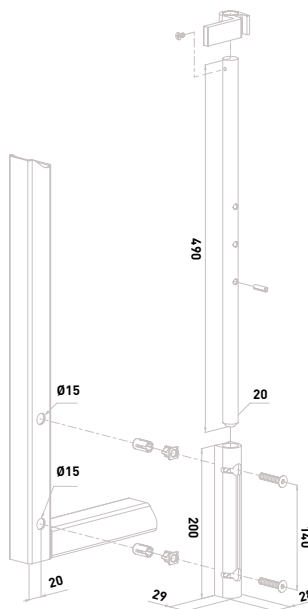

Dimensions in: mm

#### LOCINOX VSF & VSA SURFACE MOUNTED DROP BOLT

##### SPECIFICATION

TYPE VSF: HOT-DIP GALVANIZED PIN

TYPE VSA: ALUMINIUM PIN

WITH ALUMINIUM HEAD BLOCK

FOR PROFILES AS OF 40 MM OR MORE

HEIGHT ADJUSTABILITY OF THE DROP BOLT: 100 MM - THROW: 140 MM

LOCKS ITSELF BETWEEN THE WINGS OF THE GATE

FAST AND EASY FIXING WITH QUICK-FIX - EASY TO RETROFIT

**CLICK & COLLECT  
START SAVING  
TODAY**

- REGISTER ONLINE  
- PLACE AN ORDER  
- COLLECT

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)



## AES CENTURION HEAVY DUTY SOLENOID ELECTRIC BOLT

The **Centurion** lock is a heavy duty device, designed to secure double swing gates. This device is normally installed on the second leaf, and is used in conjunction with a mechanical stop. This secures both leaves against the stop.

This lock requires **24vdc** to retract it and hold it in position when the gates are moving. Once it is de energised, it will extend to the locked position again via a spring return mechanism.


Most gate control panels have a permanent voltage output on the flashing beacon terminals when the beacon is active (flashing is handled internally by the beacon). Use this permanent supply signal as a means of switching on power to the lock through a relay during the gate stroke.



### HEAVY DUTY SOLENOID ELECTRIC BOLT

CEGL	Solenoid electric drop bolt - 60mm throw - 24vdc
<b>SPARES &amp; ACCESSORIES</b>	
CLPS	24vdc 5a power supply
CLMK	Lock cylinder & lock override key

### TECHNICAL INFO:

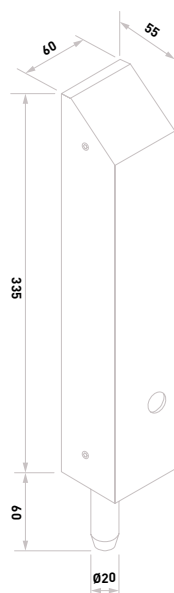

Dimensions in: mm

#### AES HEAVY DDUTY SOLENOID ELECTRIC BOLT

ELECTRICAL DATA		CENTURION
PSU INPUT		230VAC
PSU OUTPUT		24VDC
CURRENT		150MA STANDBY - 5A MAX
DIMENSIONAL & GENERAL DATA		
POWER SUPPLY UNIT		24V 10A
PROTECTION LEVEL		EXTERNAL USE
WORKING TEMP (°C MIN/MAX)		-5 - +50

### ROLLING CENTER QUICK FOLDING



Turn to page **190**



## COMPACT HINGE & GATE CLOSER IN ONE - For gates up to 75kg, 1.1m leaf

TIGER ZILV	Silver hydraulic - self closing hinge - angle up to 180° - easy to open max 12Nm
TIGER 9005	Black hydraulic - self closing hinge - angle up to 180° - easy to open max 12Nm
<b>SPARES &amp; ACCESSORIES</b>	
PUMA	Replacement hinge


## LOCINOX TIGER COMPACT HINGE & GATE CLOSER IN ONE

**180°** self-closing hydraulic hinge with precise adjustments on speed and final snap.

The aluminium powder coated housing and unique high-tech components allow the Tiger to function perfectly in any weather situation. The **Puma** hinge is included.

**Need fall protection?** recommended fall protection device the **U-Safe** gate safety cable avoids the gate to fall in case of hinge failure. Thanks to the patented Quick-Fix fixation system, the U-Safe is easily yet firmly fixed into the post. The U-Safe cable is rated up to 1500 kg and prevents gates up to 500 kg from falling in case both hinges might fail. U-Safe has been developed to secure a gate in accordance with EN 12604.

## TECHNICAL INFO:

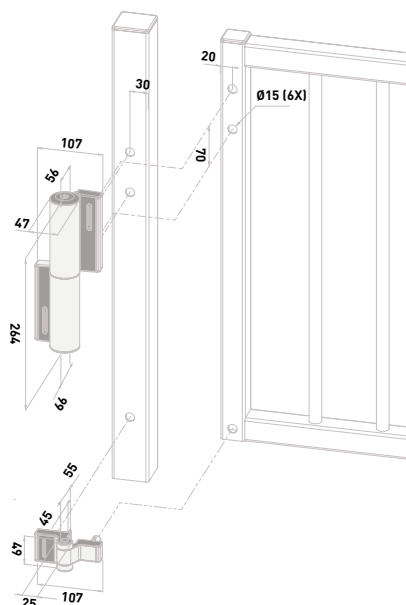

Dimensions in: mm

### LOCINOX TIGER COMPACT HINGE & GATE CLOSER

#### SPECIFICATION

AUTOMATIC 180° - CLOSING WITH ADJUSTABLE CLOSING SPEED AND FINAL SNAP
AESTHETIC DESIGN - FOR LEFT AND RIGHT TURNING GATES
CLOSING SPEED UNAFFECTED BY HUMIDITY AND TEMPERATURE CHANGES
POWDER COATED ALUMINIUM HOUSING
20 MM VERTICAL ADJUSTABILITY
15 MM HORIZONTAL ADJUSTABILITY
EASY TO OPEN: MAX. 14 NM

## FOR SWING GATE HINGES

See page **180** for details



## LOCINOX LION COMPACT & POLYVALENT HYDRAULIC GATE CLOSER

The attractive and compact **Lion** gate closer is unique in its kind. This hydraulic all-rounder is fit for every possible gate situation. Moreover, both **90°** and **180°** railsets are included in the package, allowing for more flexibility on site.

The anodised aluminium housing combines aesthetically pleasing look with a durable and spotless functioning for many years.


**Need fall protection?** recommended fall protection device the **U-Safe** gate safety cable avoids the gate to fall in case of hinge failure. Thanks to the patented Quick-Fix fixation system, the U-Safe is easily yet firmly fixed into the post. The U-Safe cable is rated up to 1500 kg and prevents gates up to 500 kg from falling in case both hinges might fail. U-Safe has been developed to secure a gate in accordance with EN 12604.



### COMPACT & POLYVALENT GATE CLOSER - For gates up to 75kg, 1.1m leaf

LION ZILV	Silver compact closer - automatic 180° closing - railsets included - easy to open max 16Nm
LION 9005	Black compact closer - automatic 180° closing - railsets included - easy to open max 16Nm
SPARES & ACCESSORIES	
SHELL-LION-ALUM	Aluminium shell for Lion closer

### TECHNICAL INFO:

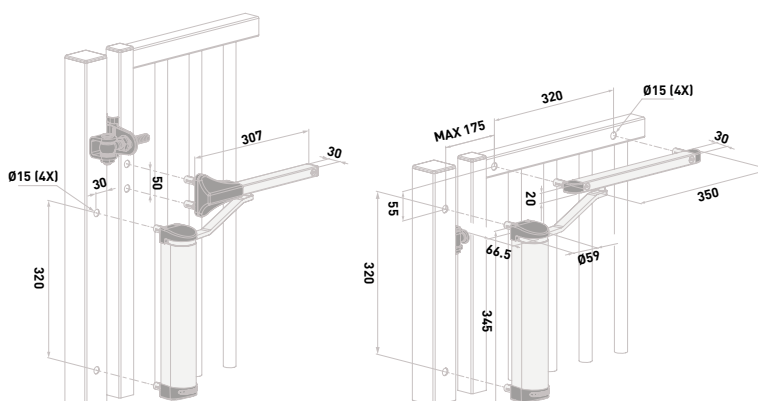

### PAL SMART GSM DEVICE



Turn to page **92**

Dimensions in: mm

#### LOCINOX LION COMPACT GATE CLOSER

##### SPECIFICATION

AUTOMATIC 180° - CLOSING WITH ADJUSTABLE CLOSING SPEED AND FINAL SNAP
RAILSET INCLUDED FOR 90° AND 180° SITUATIONS
SCRATCH RESISTANT AND CORROSION FREE ANODISED ALUMINIUM HOUSING
COMPACT & AESTHETIC DESIGN FOR LEFT & RIGHT TURNING GATES
INTEGRATED PRETENSION FOR EXTRA SMOOTH INSTALLATION
CLOSING SPEED UNAFFECTED BY TEMPERATURE CHANGES
EASY TO OPEN: MAX. 16 NM



## POST & WALL MOUNT HYDRAULIC GATE CLOSER - For gates up to 150kg, 1.5m leaf

PANTHER 9005

Black hydraulic - self closing hinge - adjustable speed & final snap - angle up to 120°



### LOCINOX PANTHER POST & WALL MOUNT HYDRAULIC GATE CLOSER


Versatile, easy-to-install and compact gate closer designed specifically for wall and post situations.

**Panther** is installed above the gate or between two pillars and can precisely be adjusted to anyone's wishes. The guaranteed closing force over the full **120°** opening angle results in a worry free use, whatever the weather conditions.

The aesthetic and scratch free anodised housing ensures a very long life cycle.

**Need fall protection?** recommended fall protection device the **U-Safe** gate safety cable avoids the gate to fall in case of hinge failure. Thanks to the patented Quick-Fix fixation system, the U-Safe is easily yet firmly fixed into the post. The U-Safe cable is rated up to 1500 kg and prevents gates up to 500 kg from falling in case both hinges might fail. U-Safe has been developed to secure a gate in accordance with EN 12604.

### TECHNICAL INFO:

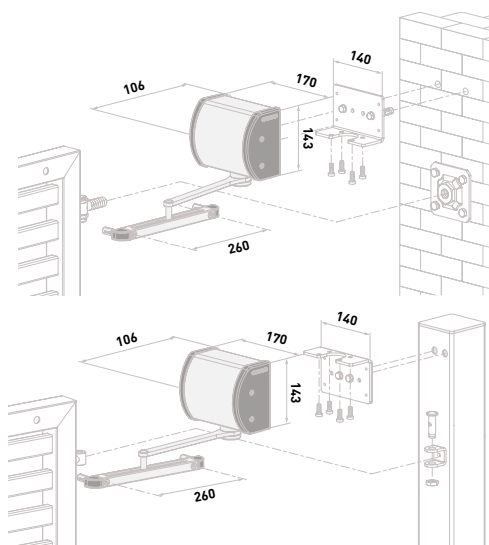

Dimensions in: mm

#### LOCINOX PANTHER HYDRAULIC GATE CLOSER

##### SPECIFICATION

SELF-CLOSING GATE CLOSER WITH ADJUSTABLE SPEED AND FINAL SNAP

CLOSING SPEED UNAFFECTED BY TEMPERATURE CHANGES

SCRATCH RESISTANT AND CORROSION FREE ANODISED ALUMINIUM HOUSING

AESTHETIC & COMPACT DESIGN - DESIGNED TO BE INSTALLED ABOVE THE GATE

INTEGRATED PRETENSION FOR EXTRA SMOOTH INSTALLATION

CLOSING FORCE OVER THE FULL 120° OPENING ANGLE

EASY TO OPEN: MAX. 25 NM

**WE HAVE A FULL  
RANGE OF  
INTERCOMS  
AVAILABLE AT  
COMPETITIVE  
PRICES**

If you don't see what you're looking for call us on **0113 201 6677** or email **Info@rollingcenter.co.uk**



## LOCINOX VERTICLOSE2 POWERFUL HYDRAULIC GATE CLOSER

The **Verticlose-2** gate closer is top-of-the-range within the Verticlose product series.

It is extremely multifunctional and possesses excellent features, which makes Verticlose-2 a perfect fit for both **90°** and **180°** hinge situations. The integrated pre-tension and continuous adjustability of speed and final snap, combined with our Quick-Fix mounting system, guarantee a quick and efficient installation.

This aesthetic anodised aluminium gate closer with high-tech internal components ensures an exceptionally long life span.

**Need fall protection?** recommended fall protection device the **U-Safe** gate safety cable avoids the gate to fall in case of hinge failure. Thanks to the patented Quick-Fix fixation system, the U-Safe is easily yet firmly fixed into the post. The U-Safe cable is rated up to 1500 kg and prevents gates up to 500 kg from falling in case both hinges might fail. U-Safe has been developed to secure a gate in accordance with EN 12604.



### POWERFUL HYDRAULIC GATE CLOSER - For gates up to 150kg, 1.5m leaf

#### VERTICLOSE2 ZILV

Silver gate mount closer - self closing - closing force over full 180° - easy to open max 25Nm

#### VERTICLOSE2 9005


Black gate mount closer - self closing - closing force over full 180° - easy to open max 25Nm

#### SPARES & ACCESSORIES

##### SHELL-RHINO-VTC-ALUM

Aluminium cover for Rhino & Verticlose 2

### TECHNICAL INFO:

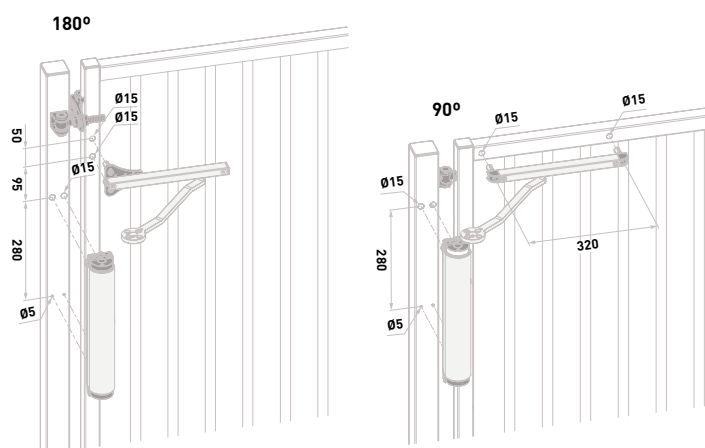

**AUTOMATION &  
HARDWARE  
TRAINING  
COURSES  
AVAILABLE ON  
REQUEST**

Call us on  
**0113 201 6677** for more  
details.

Dimensions in: mm

#### LOCINOX VERTICLOSE2 GATE CLOSER

##### SPECIFICATION

MICRO ADJUSTMENT OF SPEED AND FINAL SNAP

RAILSET INCLUDED FOR 90° AND 180° SITUATIONS

SCRATCH RESISTANT AND CORROSION FREE ANODISED ALUMINIUM HOUSING

AESTHETIC & COMPACT DESIGN

INTEGRATED PRETENSION FOR EXTRA SMOOTH INSTALLATION

CLOSING FORCE OVER THE FULL 180° OPENING ANGLE

EASY TO OPEN: MAX. 25 NM





## POWERFUL WALL-MOUNT HYDRAULIC GATE CLOSER - For gates up to 150kg, 1.5m leaf

VERTICLOSE2 WALL ZILV

Silver wall mount closer - self closing - closing force over full 180° - easy to open max 25Nm



### LOCINOX VERTICLOSE 2 WALL POWERFUL WALL-MOUNT HYDRAULIC GATE CLOSER


The **Verticlose-2 Wall** gate closer has been specifically designed for wall mounting where the gate closer itself is positioned **90°** in relation to the gate.

The specially designed arm turns around the wall or post, ensuring a large opening angle.

The aesthetic anodised aluminium gate closer with high-tech internal components ensures an exceptionally long life span.

**Need fall protection?** recommended fall protection device the **U-Safe** gate safety cable avoids the gate to fall in case of hinge failure. Thanks to the patented Quick-Fix fixation system, the U-Safe is easily yet firmly fixed into the post. The U-Safe cable is rated up to 1500 kg and prevents gates up to 500 kg from falling in case both hinges might fail. U-Safe has been developed to secure a gate in accordance with EN 12604.

### TECHNICAL INFO:

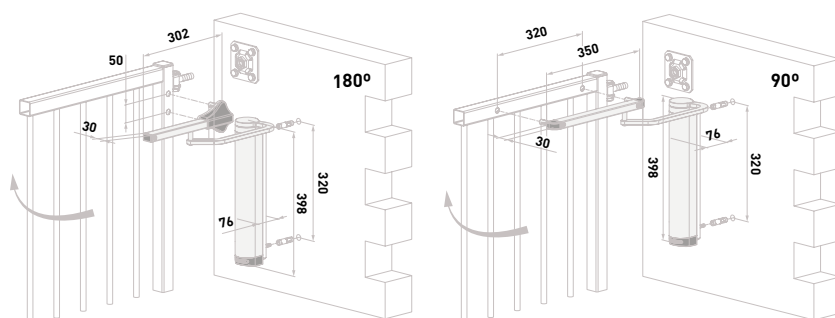

Dimensions in: mm

#### LOCINOX VERTICLOSE2 WALL GATE CLOSER

##### SPECIFICATION

- SELF-CLOSING GATE CLOSER WITH ADJUSTABLE SPEED AND FINAL SNAP
- SPECIALLY DESIGNED ARM FOR WALL MOUNTING WHILE GUARANTEEING A BIG OPENING ANGLE
- SCRATCH RESISTANT AND CORROSION FREE ANODISED ALUMINIUM HOUSING
- AESTHETIC & COMPACT DESIGN
- INTEGRATED PRETENSION FOR EXTRA SMOOTH INSTALLATION
- CLOSING FORCE OVER THE FULL 180° OPENING ANGLE
- EASY TO OPEN: MAX. 25 NM

#### COMELIT KIT VISTO WI-FI DOORBELL INTERCOM



Turn to page **135**



## LOCINOX SAMSON2 HYDRAULIC GATE CLOSER FOR LARGE GATES

Simple installation and versatility make it the perfect fit for larger gates.

**Samson2** is a polyvalent hydraulic gate closer developed with high quality components for an exceptional long life span. Temperature changes do not affect the smooth and constant functionality.

The set of mounting brackets that are delivered with the closer make **Samson2** fit any gate.


**Need fall protection?** recommended fall protection device the **U-Safe** gate safety cable avoids the gate to fall in case of hinge failure. Thanks to the patented Quick-Fix fixation system, the U-Safe is easily yet firmly fixed into the post. The U-Safe cable is rated up to 1500 kg and prevents gates up to 500 kg from falling in case both hinges might fail. U-Safe has been developed to secure a gate in accordance with EN 12604.



### HYDRAULIC GATE CLOSER FOR LARGE GATES - For gates up to 150kg, 2m leaf

SAMSON2	Silver - Hydraulic gate closer - angle up to 150° - easy to open max 25Nm
SPARES & ACCESSORIES	
FORK-SAM	Fixing kit

### TECHNICAL INFO:

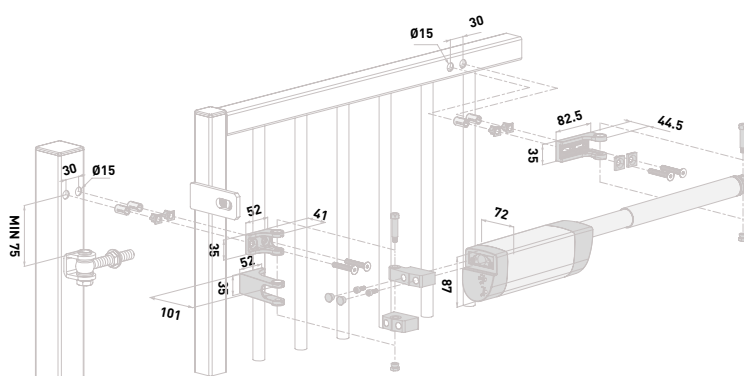

#### ASO RESISTIVE SAFETY EDGES



Turn to page **71**

Dimensions in: mm

#### LOCINOX SAMSON2 GATE CLOSER

##### SPECIFICATION

OPENING ANGLE UP TO 150° DEPENDING ON THE SITUATION
SPECIALLY DEVELOPED FOR OUTDOOR USE: INDUSTRIAL QUALITY
SCRATCH RESISTANT AND CORROSION FREE ANODISED ALUMINIUM HOUSING
CLOSING SPEED UNAFFECTED BY TEMPERATURE CHANGES
FAST AND EASY FIXING WITH QUICK-FIX
FOR LEFT AND RIGHT TURNING GATES
EASY TO OPEN: MAX. 25 NM



## LOCINOX MAMMOTH 180° GATE CLOSER & HINGE IN ONE

Elegant and powerful self-closing hinge for **180°** gate situations.

Mammoth is perfectly fit for gates up to **150kg** and **1500mm** wide. It is equipped with a double bearing for exceptional functionality.

The Active Thermal System guarantees a constant closing speed, unaffected by weather conditions. The Dino hinge is included.

**Need fall protection?** recommended fall protection device the **U-Safe** gate safety cable avoids the gate to fall in case of hinge failure. Thanks to the patented Quick-Fix fixation system, the U-Safe is easily yet firmly fixed into the post. The U-Safe cable is rated up to 1500 kg and prevents gates up to 500 kg from falling in case both hinges might fail. U-Safe has been developed to secure a gate in accordance with EN 12604.

### GATE CLOSER & HINGE IN ONE - For gates up to 150kg, 1.5m leaf

MAMMOTH ZILV

Silver self closing hinge - hydraulic dampening - angle up to 180° - easy to open max 16Nm

MAMMOTH 9005


Black self closing hinge - hydraulic dampening - angle up to 180° - easy to open max 16Nm

#### SPARES & ACCESSORIES

DINO

Bottom hinge

### TECHNICAL INFO:

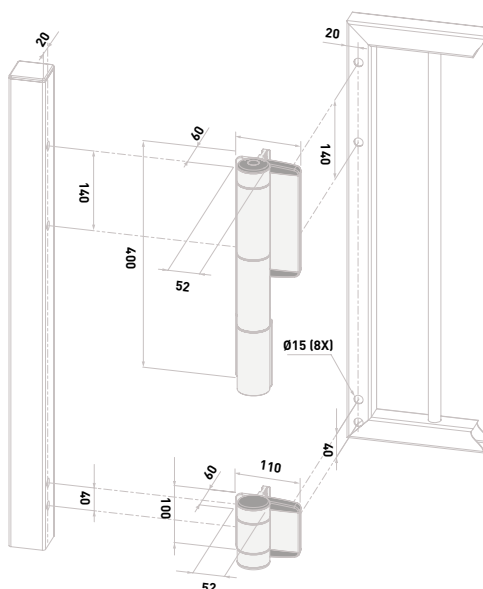

Dimensions in: mm

#### LOCINOX MAMMOTH 180° GATE CLOSER

##### SPECIFICATION

180° HYDRAULIC GATE CLOSER WITH ADJUSTABLE SPEED

AESTHETIC DESIGN

POWDER COATED ALUMINIUM HOUSING

CLOSING SPEED UNAFFECTED BY TEMPERATURE

EASY TO OPEN: MAX. 16 NM

VANDAL-PROOF - FOR LEFT & RIGHT TURNING GATES

EASY MOUNTING WITH QUICK-FIX

### MAMMOTH HD HEAVY DUTY VERSION AVAILABLE

Speak with our sales team for more information on **0113 201 6677** or email [Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)

### ROLLING CENTER COMPOSITE FENCE BOARDS



Turn to page **258**



LOCINOX  
INTERIO  
BUILT-IN HYDRAULIC  
GATE CLOSER

The invisible Interio gate closer, with matching hinge set, is completely built into the gate frame.

This highly aesthetic solution opens and closes the gate comfortably. The integrated pre-tension ensures an efficient and flawless installation where speed and final snap can be adjusted accurately to fit any need.

A constant closing speed is guaranteed in all weather conditions, without any adjustments needed. Interio is perfectly suited for both left and right turning gates.

**Need fall protection?** recommended fall protection device the **U-Safe** gate safety cable avoids the gate to fall in case of hinge failure. Thanks to the patented Quick-Fix fixation system, the U-Safe is easily yet firmly fixed into the post. The U-Safe cable is rated up to 1500 kg and prevents gates up to 500 kg from falling in case both hinges might fail. U-Safe has been developed to secure a gate in accordance with EN 12604.

NEED SWING GATE  
HARDWARE?



See page 179



BUILT-IN HYDRAULIC GATE CLOSER - For gates up to 150kg, 1.5m leaf

INTERIO	Built-in hydraulic gate closer - 50-60mm box section - self closing up to 125°
SPARES & ACCESSORIES	
INTERIO GROUND 9005	Wall fixing set for Interio gate closer - black hot-dip galvanised steel
INTERIO WALL 9005	Wall fixing set for Interio gate closer - ground hinge & wall panel

TECHNICAL INFO:

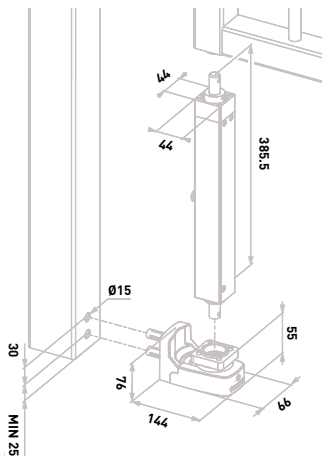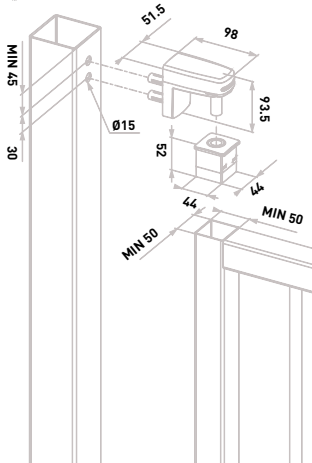

Dimensions in: mm

LOCINOX INTERIO HYDRAULIC GATE CLOSER

SPECIFICATION

SELF-CLOSING UP TO 125° (DEPENDENT ON THE SITUATION) WITH ADJUSTABLE CLOSING SPEED AND FINAL SNAP
CONSTANT CLOSING SPEED IN HOT OR COLD WEATHER
VANDAL-PROOF
FOR LEFT & RIGHT TURNING GATES
AVAILABLE FOR 50 AND 60 MM PROFILES WITH MAX 2 MM THICKNESS
OPTIONAL SETS AVAILABLE FOR GROUND AND WALL INSTALLATION
RECOMMENDED WITH GATESTOP



## GCG 2000 GAS GARDEN GATE CLOSER

This is an easy to install, inexpensive gate closer for residential/light commercial garden gates which provides hydraulically controlled closing speed and final latching speed adjustments.

Suitable for gate weights up to **50kg**  
width up to **1000mm** max/height up to **1800mm** max

**GAS GATE CLOSER** - For gates up to 50kg, 1m leaf

GCG 2000

Gas closer - angle up to 90° - adjustable latching & closing speed



## GCG EASY 200 PEDESTRIAN GAS GATE CLOSER

This is an easy to install, inexpensive gate closer for residential/commercial garden gates which provides hydraulically controlled closing speed and final latching speed adjustments.

Suitable for gate weights up to **80kg**  
width up to **1200mm** max/height up to **1800mm** max

**GAS GATE CLOSER** - For gates up to 80kg, 1.2m leaf

GCG EASY 200

Gas closer - angle up to 90° - 200Nm



## GCG 5000 GAS GATE CLOSER

This is an easy to install, inexpensive gate closer for residential/commercial garden gates which provides hydraulically controlled closing speed and final latching speed adjustments.

Suitable for gate weights up to **100kg**  
width up to **1500mm** max/height up to **1800mm** max

**GAS GATE CLOSER** - For gates up to 100kg, 1.5m leaf

GCG 5000

Gas closer - angle up to 90° - 200Nm

# '22

2022 TRADE CATALOGUE

GATE HARDWARE  
GATE AUTOMATION  
ACCESS CONTROL  
GATE SAFETY  
ALUMINIUM GATES

**TEL.** 0113 201 6677

# SECTION F

# SWING GATE HARDWARE

GATE HINGES	180
JOINT ELEMENTS	183
PLATES	184
IN-LINE GATE HINGES	185
ROTATING GATE HINGES	186
TRAVEL STOPS	188
QUICK FOLDING HARDWARE	190




## ROLLING CENTER CR WELD-ON HINGE WITH ADJUSTABLE BOSS



### WELD-ON HINGE WITH ADJUSTABLE BOSS

CR 18	Yellow galvanised - weld-on hinge for 35mm box section min
CR 20	Yellow galvanised - weld-on hinge for 40mm box section min
CR 24	Yellow galvanised - weld-on hinge for 50mm box section min

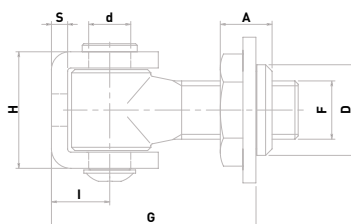


WELD ON HINGE									
REFERENCE	D Ø	d Ø	F (thread)	G MIN / MAX	I	H	S	A	WEIGHT
CR 18	28	14	M 18	50 - 85	18	36	5	15	0.40 KG
CR 20	28	14	M 20	50 - 85	21	39	6	15	0.49 KG
CR 24	34	17	M 24	60 - 100	26	47	6	17	0.81 KG

## ROLLING CENTER CR WELD-ON HINGE WITH PLATE & ADJUSTABLE BOSS



### WELD-ON HINGE WITH PLATE & ADJUSTABLE BOSS

CR 18P	Yellow galvanised - weld-on hinge with plate for 35mm box section min
CR 20P	Yellow galvanised - weld-on hinge with plate for 40mm box section min
CR 24P	Yellow galvanised - weld-on hinge with plate for 50mm box section min



WELD ON HINGE WITH PLATE											
REFERENCE	D Ø	F (thread)	G MIN / MAX	I	H	S	A	L PLATE	d1 Ø	INT	WEIGHT
CR 18 P	28	M 18	40 - 75	18	36	5	17	60 X 90	9	40 X 70	0.52 KG
CR 20 P	28	M 20	40 - 75	21	40	6	20	100	9	70	0.84 KG
CR 24 P	34	M 24	52 - 90	26	47	6	20	120	11	90	1.41 KG

ASO RESISTIVE  
SAFETY EDGES



Turn to page 71





**ROLLING CENTER  
CR  
HEAVY DUTY  
WELD-ON HINGE  
WITH ADJUSTABLE BOSS**


**HEAVY DUTY WELD-ON HINGE WITH ADJUSTABLE BOSS**

CR 50

Yellow galvanised - heavy duty - weld-on hinge for 50mm box section min

CR 60

Yellow galvanised - heavy duty - weld-on hinge for 60mm box section min

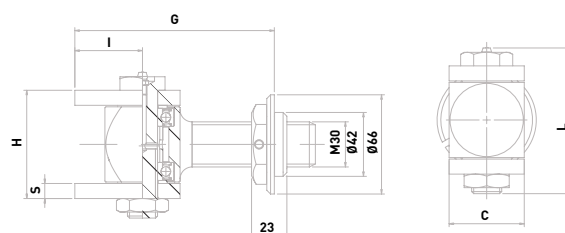

LARGE WELD ON HINGE								Dimensions in: mm	
REFERENCE	C	H	G MIN / MAX	I	S	L	CAPACITY	WEIGHT	
CR 50	50	72	95 - 150	45	10	100	500 KG	2.1 KG	
CR 60	60	85	100 - 155	50	12	110	680 KG	3 KG	



**ROLLING CENTER  
CL  
WELD-ON HINGE  
WITH EXTENDED THREAD**


**WELD-ON HINGE WITH PLATE**

CL 20

Yellow galvanised - weld-on hinge with extended bar for 40mm box section min

CL 24

Yellow galvanised - weld-on hinge with extended bar for 50mm box section min

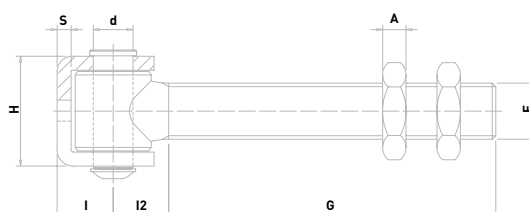

WELD ON HINGE WITH EXTENDED THREADED BAR									Dimensions in: mm	
REFERENCE	d Ø	F (thread)	G	I	I2	H	S	A	WEIGHT	
CL 20	14	M 20	143	21	18	40	6	9	1.56 KG	
CL 24	17	M 24	141	26	24	47	6	10	0.99 KG	


**NICE & BENINCA  
UNDERGROUND  
AUTOMATION**

See page 18




**ROLLING CENTER  
CL  
HEAVY DUTY  
WELD-ON HINGE  
WITH EXTENDED THREAD**

NEW



**HEAVY DUTY EXTENDED WELD-ON HINGE**

CL 50	Yellow galvanised - heavy duty - extended bar - weld-on hinge for 50mm box section min
CL 60	Yellow galvanised - heavy duty - extended bar - weld-on hinge for 50mm box section min

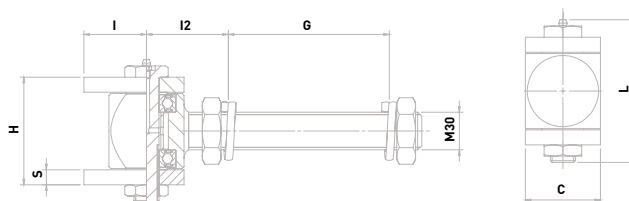


LARGE WELD ON HINGE WITH EXTENDED THREADED BAR										
REFERENCE	F	C	H	S	L	I	I2 MIN	G MAX	CAPACITY	WEIGHT
CL 50	M 30	50	72	10	100	45	50	140	500 KG	2.8 KG
CL 60	M 30	60	86	12	110	50	55	140	600 KG	3.8 KG

**ROLLING CENTER  
CR  
WRAP-AROUND HINGE  
WITH ADJUSTABLE BOSS**



**WRAP-AROUND HINGE**

CR 30	Yellow galvanised - wrap-around hinge for 35mm box section min
CR 35	Yellow galvanised - wrap-around hinge for 40mm box section min
CR 40	Yellow galvanised - wrap-around hinge for 50mm box section min

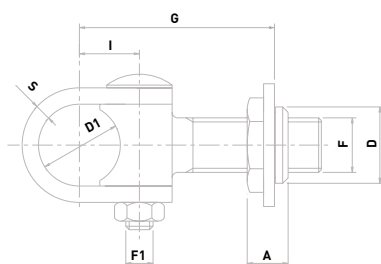

Dimensions in: mm									
WRAP AROUND HINGE									
REFERENCE	D Ø	D1 Ø	F (thread)	F1 (thread)	G MIN / MAX	I	S	A	WEIGHT
CR 30	28	30	M 20	M 10	50 - 78	22	6	15	0.54 KG
CR 35	34	35	M 24	M 10	57 - 88	26	6	17	0.77 KG
CR 40	43	40	M 30	M 12	70 - 110	34	6	24	1.36 KG

**NEED ASSISTANCE  
WITH CHOOSING  
THE RIGHT KIT?**


Call us on  
**0113 201 6677** our friendly  
team are here to help.



**ROLLING CENTER  
CR  
WRAP-AROUND HINGE  
WITH PLATE &  
ADJUSTABLE BOSS**

**WRAP-AROUND HINGE WITH PLATE**

CR 30P	Yellow galvanised - wrap-around hinge with plate for 35mm box section min
CR 35P	Yellow galvanised - wrap-around hinge with plate for 40mm box section min
CR 40P	Yellow galvanised - wrap-around hinge with plate for 50mm box section min



Dimensions in: mm

**WRAP AROUND HINGE WITH PLATE**


REFERENCE	L (plate)	D1 Ø	F (thread)	F1 (thread)	G MIN / MAX	I	S	A	d1 Ø	INT	WEIGHT
CR 30P	100	30	M 20	M 10	39 - 63	22	6	20	9	70	0.89 KG
CR 35P	120	35	M 24	M 10	45 - 74	26	6	20	11	90	1.39 KG
CR 40P	120	40	M 30	M 12	70 - 110	34	6	25	11	90	1.39 KG



**ROLLING CENTER  
T  
WELD-IN JOINT ELEMENT**

**WELD-IN JOINT ELEMENT**

T 30	Yellow galvanised - weld-in joint element for 35mm box section
T 35	Yellow galvanised - weld-in joint element for 40mm box section
T 40	Yellow galvanised - weld-in joint element for 50mm box section

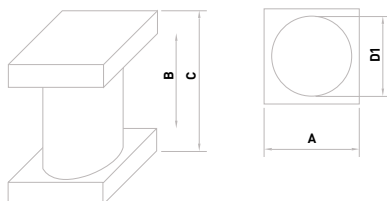

Dimensions in: mm

**WELD-IN JOINT ELEMENT FOR WRAP AROUND HINGES**

REFERENCE	D1 Ø	A	B	C	WEIGHT
T 30	28.5	35	35	55	0.37 KG
T 35	33.5	40	40	60	0.53 KG
T 40	38.5	50	45	65	0.81 KG

**ROLLING CENTER  
CAVO FALL  
PROTECTION  
CABLES**



Turn to page **70**



## ROLLING CENTER T EXTENDED WELD-IN JOINT ELEMENT




### EXTENDED WELD-IN JOINT ELEMENT

T 35 / 80

Yellow galvanised - extended weld-in joint element for 40mm box section

T 40 / 90

Yellow galvanised - extended weld-in joint element for 50mm box section

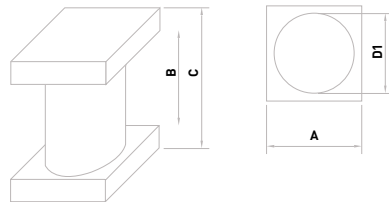

EXTENDED WELD-IN JOINT ELEMENT FOR WRAP AROUND HINGES					
REFERENCE	D1 Ø	A	B	C	WEIGHT
T 35 / 80	28.5	35	80	100	0.80 KG
T 40 / 90	33.5	40	90	110	1.20 KG

## ROLLING CENTER PR PLATE WITH ADJUSTABLE BOSS



### HINGE PLATE WITH ADJUSTABLE BOSS

PR18

Yellow galvanised - bolt-on plate - for hinges with a M18 thread - adjustable boss

PR20


Yellow galvanised - bolt-on plate - for hinges with a M20 thread - adjustable boss

PR24

Yellow galvanised - bolt-on plate - for hinges with a M24 thread - adjustable boss

PR30


Yellow galvanised - bolt-on plate - for hinges with a M30 thread - adjustable boss

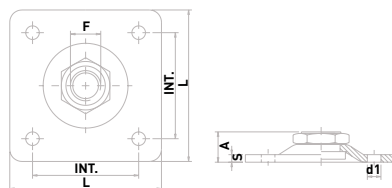

**REGISTER FOR A  
TRADE ACCOUNT  
TODAY  
TO RECEIVE TRADE  
DISCOUNTS**

Call us on  
**0113 201 6677** our friendly  
team are here to help.

PLATE WITH ADJUSTABLE BOSS							Dimensions in: mm
REFERENCE	L (plate size)	F (thread)	S	A	INT.	d1 Ø	WEIGHT
PR 18	60 x 90	M 18	4	14	40 x 70	9	0.25 KG
PR 20	100	M 20	5	19	70	11	0.44 KG
PR 24	120	M 24	6	20	90	11	0.71 KG
PR 30	120	M 30	6	25	90	11	0.77 KG




**ROLLING CENTER  
PASCAL 1  
BOLT-ON 180° HINGE**

**LARGE BOLT-ON 180° HINGE**

PASCAL1


Yellow galvanised - 180° - bolt-on hinge

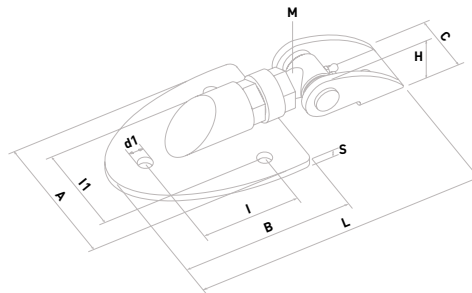

Dimensions in: mm

PASCAL1 180° BOLT-ON HINGE

REFERENCE	A	B	C	d1	I	I1	M	H	L	S	FINISH	WEIGHT
PASCAL 1	120	140	46.5	12	80	80	20	40	235 / 247	5	GALVANISED	1.42 KG




**ROLLING CENTER  
PASCAL 2  
BOLT-ON 180° HINGE**

**SMALL BOLT-ON 180° HINGE**

PASCAL2

Black finish steel - 180° - bolt-on hinge

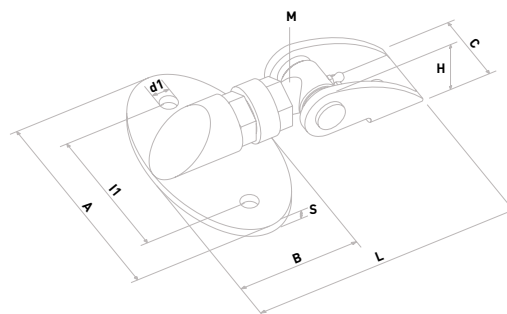

Dimensions in: mm

PASCAL2 180° BOLT-ON HINGE

REFERENCE	A	B	C	d1	I	I1	M	H	L	S	FINISH	WEIGHT
PASCAL 2	150	80	46.5	12	100	20	40	40	178 / 190	5	GALVANISED	1.22 KG

**LOCINOX  
HYDRAULIC GATE  
CLOSERS**

See page 169



## ROLLING CENTER PG ADJUSTABLE ROTATING TOP HINGE WITH WELD-ON FIXING PLATE





### ADJUSTABLE ROTATING TOP HINGE WITH WELD-ON FIXING PLATE

PG51S

Yellow galvanised - 50mm diameter - adjustable 48-60mm - rotating hinge - up to 450kg

PG71S

Yellow galvanised - 70mm diameter - adjustable 80-95mm - rotating hinge - up to 1000kg

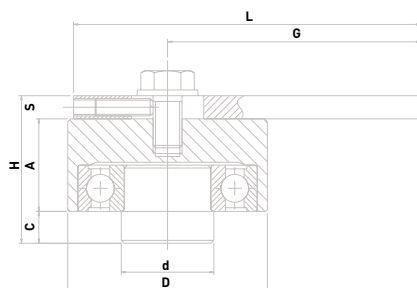

ADJUSTABLE ROTATING TOP HINGE WITH WELD-ON FIXING PLATE											
REFERENCE	D Ø	d Ø	A	C	H	B	L	S	G (min/max)	CAPACITY (kg)	WEIGHT
PG 51S	50	23	25	10	43	50	80	8	48 / 60	450	0.6 KG
PG 71S	70	32	32	11	51	70	120	8	80 / 95	1000	1.48 KG

## ROLLING CENTER PG ROTATING BOTTOM WELD-ON HINGE



### WELD-ON ROTATING BOTTOM HINGE

PG50I


Yellow galvanised - 50mm diameter - rotating hinge - up to 1000kg

PG70I

Yellow galvanised - 70mm diameter - rotating hinge - up to 2500kg

PG120I

Yellow galvanised - 120mm diameter - rotating hinge - up to 3000kg

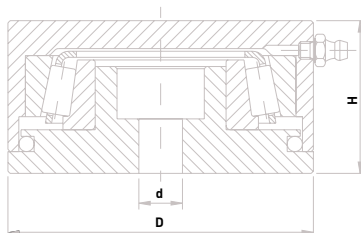

ROTATING BOTTOM WELD-ON HINGE					
REFERENCE	D Ø	d Ø	H	CAPACITY (kg)	WEIGHT
PG 50I	50	8	31	1000	0.40 KG
PG 70I	70	10	35	2500	0.87 KG
PG 120I	120	20	43	3000	4.00 KG

**LOCINOX VINCI  
MECHANICAL  
CODED SWING  
GATE LOCKS**




Turn to page **152**



**ROLLING CENTER  
PG  
ADJUSTABLE ROTATING TOP  
HINGE WITH BOLT-ON  
FIXING PLATE**

**ADJUSTABLE ROTATING TOP HINGE WITH BOLT-ON FIXING PLATE**

PG51S2	Yellow galvanised - 50mm diameter - adjustable 52-64mm - rotating hinge - up to 400kg
PG71S2	Yellow galvanised - 70mm diameter - adjustable 65-80mm - rotating hinge - up to 800kg

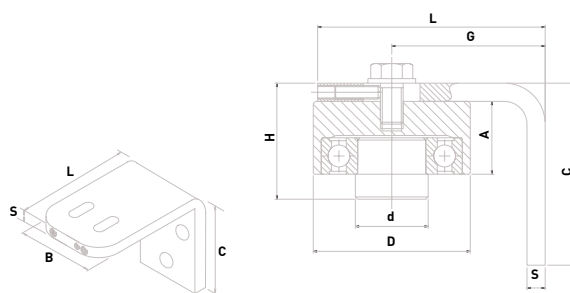

Dimensions in: mm

**ADJUSTABLE ROTATING TOP HINGE WITH BOLT-ON FIXING PLATE**


REFERENCE	D Ø	d Ø	A	H	B	L	C	S	G (min/max)	CAPACITY (kg)	WEIGHT
PG 51 S2	50	23	25	43	50	80	70	8	52 / 64	400	0.74 KG
PG 71 S2	70	32	32	51	70	100	80	8	65 / 80	800	1.65 KG



**ROLLING CENTER  
PG  
ADJUSTABLE ROTATING  
BOTTOM HINGE WITH  
BOLT-ON FIXING PLATE**

**ADJUSTABLE ROTATING BOTTOM HINGE WITH BOLT-ON FIXING PLATE**

PG50I2	Yellow galvanised - 50mm diameter - adjustable 52-64mm - rotating hinge - up to 200kg
PG70I2	Yellow galvanised - 70mm diameter - adjustable 65-80mm - rotating hinge - up to 300kg

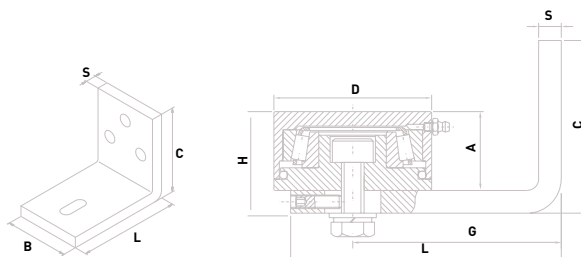

Dimensions in: mm

**ADJUSTABLE ROTATING TOP HINGE WITH BOLT-ON FIXING PLATE**

REFERENCE	D Ø	A	C	H	B	L	S	G (min/max)	CAPACITY (kg)	WEIGHT
PG 50 I2	50	31	70	40	80	80	8	52 - 64	200	0.75 KG
PG 70 I2	70	35	80	60	100	100	10	65 - 80	300	1.68 KG

**WE HAVE A FULL  
RANGE OF ACCESS  
CONTROL SOLU-  
TIONS AVAILABLE  
AT COMPETITIVE  
PRICES**

If you don't see what you're  
looking for call us on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**




ROLLING CENTER  
F105  
CONCRETE-IN CENTER  
TRAVEL STOP



CONCRETE-IN CENTER TRAVEL STOP


F105

Yellow galvanised - concrete-in travel stop - for two leaf gates



SWING GATE CONCRETE-IN CENTER TRAVEL STOP						
REFERENCE	L	H	A	B	C	WEIGHT
F105	92	77	63	35	20	0.37 KG

ROLLING CENTER  
F105  
BOLT-DOWN CENTER  
TRAVEL STOP




BOLT-DOWN CENTER TRAVEL STOP

F105BP

Yellow galvanised - small bolt-down travel stop - for two leaf gates

F105BG

Yellow galvanised - large bolt-down travel stop - for two leaf gates

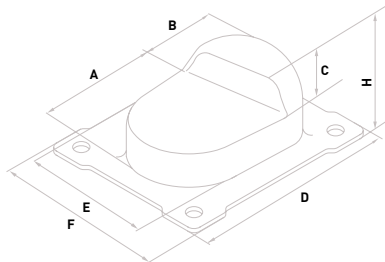

Dimensions in: mm

SWING GATE BOLT-DOWN CENTER TRAVEL STOP								
REFERENCE	A	B	C	D	E	F	H	WEIGHT
F105 BP	68	36	18	122	70	100	36	0.30 KG
F105 BP	88	42	20	157	90	130	40	0.50 KG

GATE SAFETY  
PRODUCTS

See page 59





# SAVE YOUR TIME AND MONEY!

VISIT OUR WEBSITE TODAY AND PLACE YOUR ORDER ONLINE

If you are a registered trade customer of Rolling Center, your online trade account is already set up with your bespoke trade pricing.

You can view your account at any time by visiting our website [www.rollingcenter.co.uk](http://www.rollingcenter.co.uk) and using the email address where your invoices are sent (often your accounts email address), reset your password to log in.

Upon logging in, you will be able to edit your account information, view prices and place orders.

USE OUR **CLICK & COLLECT** SERVICE ONLINE TODAY. CREATE YOUR OWN QUOTES AND PRODUCT LISTS.

*as easy as 1, 2, 3...*

1. REGISTER
2. ORDER
3. COLLECT

**CLICK & COLLECT**

**HOW TO ACCESS YOUR ONLINE TRADE ACCOUNT:**

- Visit [www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)
- Go to login
- Use the email address where your invoices are sent (often your accounts email address)
- Reset your password to log in

**SHOPPING BASKET**

Mini Kit 3 silent kit for gates up to 6m opening and 450kg in weight (1x6m)	1	£267.80
Nice high-speed sliding gate kit for gates up to 500kg 24v (Robus Kit HS)	1	£431.00
Videa GSM4KC-1S one station GSM intercom with keypad	1	£524.45
ASO 1m length 45mm profile resistive through safety edge		
<b>Empty the Basket</b>		
SUBTOTAL		£1,332.11
SHIPPING TO (HX2 9RR) <b>edit</b>		£55.00
<b>TOTAL:</b>		<b>£1,387.11</b>
TOTAL inc VAT:		£1,664.53
<b>VIEW BASKET</b>		<b>CHECKOUT</b>

## VISIT US AND START SAVING TODAY

[WWW.ROLLINGCENTER.CO.UK](http://WWW.ROLLINGCENTER.CO.UK)



## ROLLING CENTER QUICK FOLDING BI-FOLDING SWING GATE HARDWARE

**A**



CR50  
CR60

CG 50 LS



CL 60



**B**



CG 50 LI



PG 50 IRQ  
PG 70 IRQ



**C**

QF1



QF2



**D**

QF A130  
QF A200



**E**

QUICK F1



**F**

139P



139C



139R



CRN1




CRN1A



**NICE & BENINCA  
UNDERGROUND  
AUTOMATION**

See page **18**

## INLINE WITH POST MOUNT CONFIGURATION

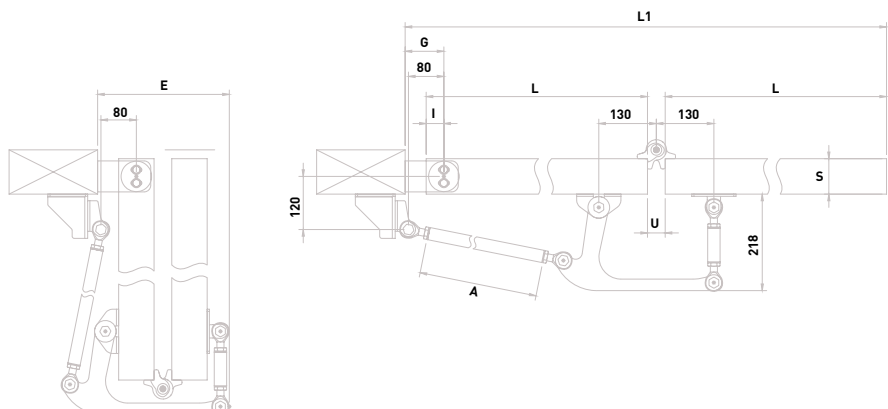

NEW


**ROLLING CENTER  
QUICK FOLDING  
BI-FOLDING SWING GATE  
HARDWARE INLINE WITH  
POST MOUNT**

Dimensions in: mm

### QUICK FOLDING - INLINE WITH POST MOUNT CONFIGURATION

REFERENCE						MAX WEIGHT 1 LEAF (L1/H=2)			
HINGE TOP	HINGE BOTTOM	G	I	L	A	E	CRN1A (kg)	CRN1 (kg)	139... (kg)
PG51S	PG50I	54	S/2	$\frac{L_1-G+I-U}{2}$	$\frac{L_1-G-I}{2} -210$	$250+G \frac{S}{2}$	150	200	250 KG
PG71S	PG70I	87.5	S/2	$\frac{L_1-G+I-U}{2}$	$\frac{L_1-G-I}{2} -210$				500 KG
CR50	PR50IRQ	95÷170	45						250 KG
CR60	PR70IRQ	100÷155	50						500 KG
CR50	CR50	95÷150	50÷105						300 KG
CR60	CR60	100÷155	55÷105						400 KG
CL60	CL60	100÷155	55÷105						400 KG

## BACK OF POST MOUNT CONFIGURATION

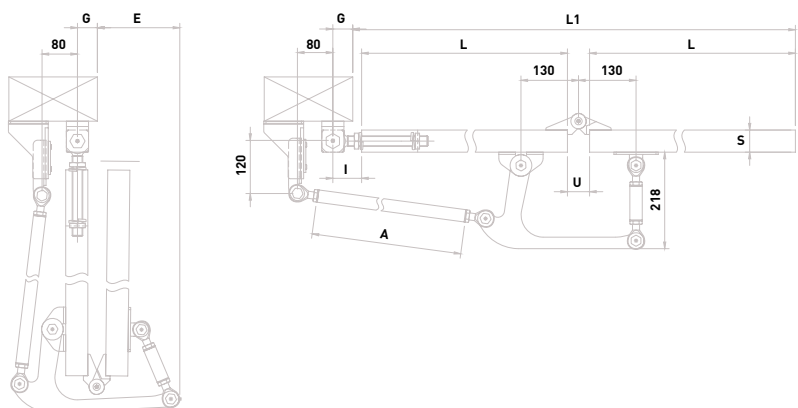

NEW

**ROLLING CENTER  
QUICK FOLDING  
BI-FOLDING SWING GATE  
HARDWARE BACK OF POST  
MOUNT**

Dimensions in: mm

### QUICK FOLDING - BACK OF POST MOUNT CONFIGURATION

REFERENCE						MAX WEIGHT 1 LEAF (L1/H=2)		
HINGE TOP	HINGE BOTTOM	I	L	A	E	CRN1A (kg)	CRN1 (kg)	139... (kg)
CR50	PG50IRQ	45	$\frac{L1+G-I-U}{2}$	$\frac{L1+G+I}{2}-210$	$250-G \cdot \frac{S}{2}$	150	200	250 KG
CR60	PG70IRQ	50						500 KG
CG50LS	CG50LI	50÷105						400 KG
CR50	CR50	50÷105						300 KG
CR60	CR60	55÷105						400 KG
CR60	CL60	55÷105						400 KG

**LOCINOX SLIDING  
& SWING GATE  
LOCKS**



Turn to page **144**



## ROLLING CENTER QUICK F1 BI-FOLDING BOOMERANG MECHANISM


NEW



### BI-FOLDING GATE BOOMERANG MECHANISM

QUICK F1

Yellow galvanised - bi-folding boomerang mechanism

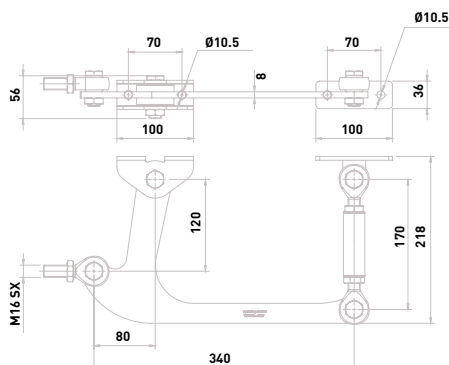

Dimensions in: mm

BOOMERANG MECHANISM FOR BI-FOLDING SWING GATES

REFERENCE	WEIGHT
QUICK F1	3.2KG

## ROLLING CENTER QF BI-FOLDING CONNECTING ROD

NEW




### BI-FOLDING GATE CONNECTION ROD

QF A130

Yellow galvanised - 1300mm - connecting rod

QF A200

Yellow galvanised - 2000mm - connecting rod

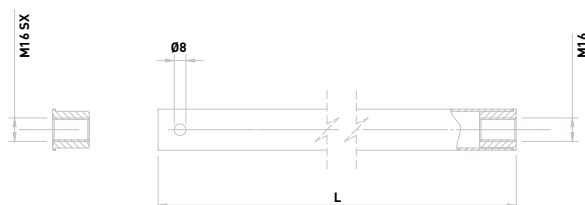

Dimensions in: mm

CONNECTING ROD FOR BI-FOLDING SWING GATES

REFERENCE	L	WEIGHT
QF A130	1300	1.4KG
QF A200	2000	2.1KG

**ROLLING CENTER  
WHATSAPP  
TECHNICAL**

Scan  
the  
QR  
code  
for  
instant  
help






NEW

**ROLLING CENTER  
QF**  
HINGE FOR BI-FOLDING  
BACK OF POST MOUNT  
CONFIGURATION

## BI-FOLDING HINGE FOR BACK OF POST MOUNT

QF F1

Yellow galvanised - for back of post mount

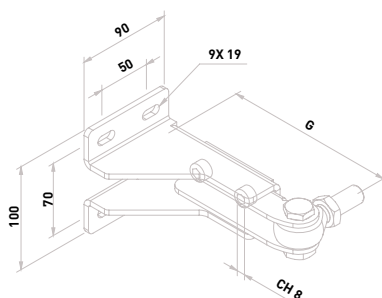

Dimensions in: mm

### HINGE FOR BI-FOLDING SWING GATES

REFERENCE	MOUNTING	WEIGHT
QF F1	BACK OF POST	1.4KG




NEW

**ROLLING CENTER  
QF**  
HINGE FOR BI-FOLDING  
IN-LINE TO GATE MOUNT  
CONFIGURATION

## BI-FOLDING HINGE FOR IN-LINE TO POST MOUNT

QF F2

Yellow galvanised - for in-line to post mount

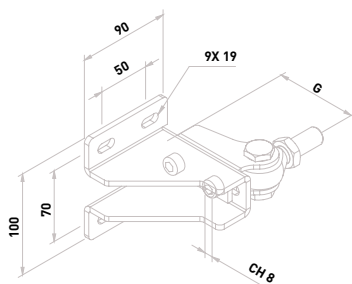

Dimensions in: mm

### HINGE FOR BI-FOLDING SWING GATES

REFERENCE	MOUNTING	WEIGHT
QF F2	INLINE TO GATE	1.7KG

**WE HAVE A FULL  
RANGE OF  
INTERCOMS  
AVAILABLE AT  
COMPETITIVE  
PRICES**

If you don't see what you're  
looking for call us on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**



**ROLLING CENTER**  
**PG**  
CANTILEVERED ROTATING  
BOTTOM HINGE WITH WELD-  
ON FIXING PLATE

NEW




**CANTILEVERED ROTATING BOTTOM HINGE WITH WELD-ON FIXING PLATE**

PG50IRQ

Yellow galvanised - 50mm diameter - adjustable 39-51mm - rotating hinge - up to 1000kg

PG70IRQ

Yellow galvanised - 70mm diameter - adjustable 41-59mm - rotating hinge - up to 1500kg



SWING GATE CANTILEVERED ROTATING BOTTOM HINGE WITH FIXING PLATE											
REFERENCE	D (Ø)	L	H	S	B	A	S1	F	HINGES	CAPACITY (kg)	WEIGHT
PG 50 IR Q	50	80	58	55	50	120	8	39÷51	CR50/CL50	1000	0.48 KG
PG 70 IR Q	70	105	71	75	70	155	10	41÷59	CR60/CL60	1500	1.1 KG

**ROLLING CENTER**  
**CG 50 LS**  
DOUBLE BEARING WELD-ON  
TOP HINGE WITH EXTENDED  
THREAD


NEW



**DOUBLE BEARING WELD-ON TOP HINGE WITH EXTENDED THREAD**

CG 50 LS

Yellow galvanised - double bearing - weld-on hinge with extended bar

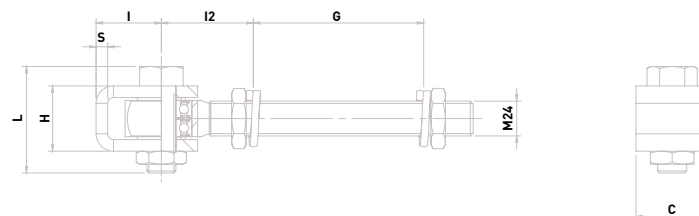

SWING GATE DOUBLE BEARING WELD-ON TOP HINGE WITH EXTENDED THREAD										
REFERENCE	F	C	H	S	L	I	I2 (min)	G (max)	CAPACITY (kg)	WEIGHT
CG 50 LS	M24	50	45	8	74	45	50	150	1000	1.95 kg

**NICE & BENINCA**  
**ABOVEGROUND**  
**AUTOMATION**

See page **32**




NEW

**ROLLING CENTER**  
**CG 50 LI**  
CONICAL BEARING  
WELD-ON BOTTOM HINGE  
WITH EXTENDED THREAD

## CONICAL BEARING WELD-ON BOTTOM HINGE WITH EXTENDED THREAD

CG 50 LI

Yellow galvanised - conical bearing - weld-on hinge with extended bar

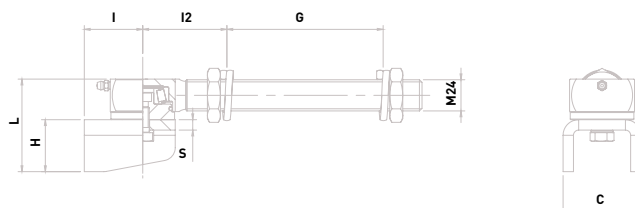

Dimensions in: mm

### CONICAL BEARING WELD-ON BOTTOM HINGE WITH EXTENDED THREAD

REFERENCE	F	C	H	S	L	I	I2 (min)	G (max)	CAPACITY (kg)	WEIGHT
CG 50 LI	M24	60	40	8	72	45	50	150	1000	1.85 KG




**ROLLING CENTER**  
**139 P**  
HEAVY DUTY ANTI-BURGLARY  
WELD-ON THREE WING IRON  
HINGE

## HEAVY DUTY ANTI-BURGLARY WELD-ON THREE WING IRON HINGE

139P

Yellow galvanised - heavy duty - anti-burglary - three wing - up to 400kg

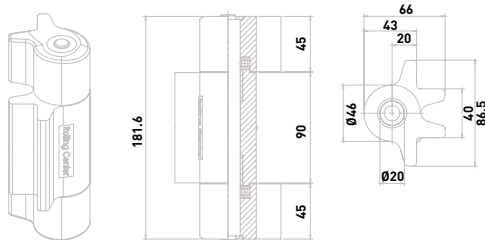

Dimensions in: mm

### HEAVY ANTI-BURGLARY WELD-ON THREE WING IRON HINGE

REFERENCE	L	CAPACITY (kg)	WEIGHT
139 P	182	400	3 KG

**BEA LASER**  
**CURTAIN SAFETY**  
**SCANNER**



Turn to page **66**






**ROLLING CENTER**  
**139 C**  
HEAVY DUTY SEPARABLE  
WELD-ON THREE WING  
IRON HINGE



**HEAVY DUTY SEPARABLE WELD-ON THREE WING IRON HINGE**

139C

Yellow galvanised - heavy duty - separable - three wing - up to 400kg

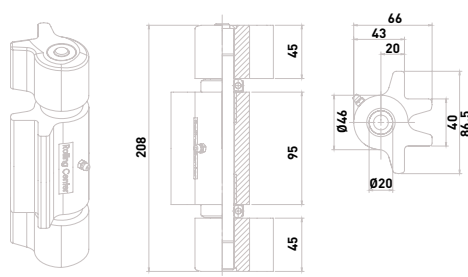

Dimensions in: mm			
HEAVY SEPARABLE WELD-ON THREE WING IRON HINGE			
REFERENCE	L	CAPACITY (kg)	WEIGHT
139 C	208	400	3.4 KG


**ROLLING CENTER**  
**139 R**  
HEAVY DUTY ADJUSTABLE  
WELD-ON THREE WING  
IRON HINGE



**HEAVY DUTY ADJUSTABLE WELD-ON THREE WING IRON HINGE**

139R

Yellow galvanised - heavy duty - adjustable - three wing - up to 400kg

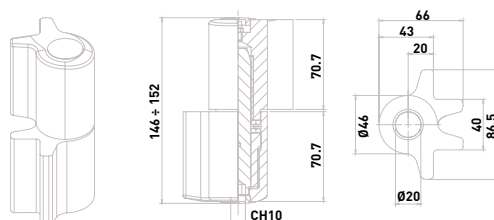

Dimensions in: mm			
HEAVY ADJUSTABLE WELD-ON THREE WING IRON HINGE			
REFERENCE	L	CAPACITY (kg)	WEIGHT
139 R	146÷152	400	2.45 KG

**VIDEX 4G GSM  
INTERCOM WITH  
KEYPAD**



Turn to page **130**






**ROLLING CENTER  
CRN1**  
LARGE STEEL  
HINGE WITH TWO  
CENTER-LINE WINGS

## LARGE STEEL HINGE WITH TWO CENTER-LINE WINGS

CRN1

Yellow galvanised - two wing - up to 200kg

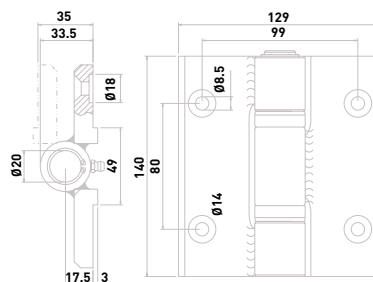

Dimensions in: mm

LARGE STEEL HINGE FOR BI-FOLDING GATES

REFERENCE	CAPACITY (kg)	WEIGHT
CRN 1	200	2.187 KG




**ROLLING CENTER  
CRN1A**  
LARGE BLACK ALLOY  
HINGE WITH TWO  
CENTER-LINE WINGS

## LARGE BLACK ALLOY HINGE WITH TWO CENTER-LINE WINGS

CRN1A

Black alloy - two wing - up to 150kg

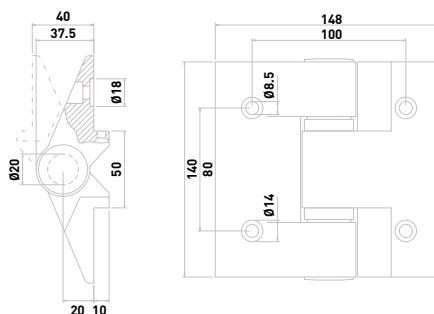

Dimensions in: mm

LARGE BLACK ALLOY HINGE FOR BI-FOLDING GATES

REFERENCE	CAPACITY (kg)	WEIGHT
CRN 1 A	150	1.09 KG

**NEED ASSISTANCE  
WITH CHOOSING  
THE RIGHT KIT?**

Call us on  
**0113 201 6677** our friendly  
team are here to help.

# '22

2022 TRADE CATALOGUE

GATE HARDWARE  
GATE AUTOMATION  
ACCESS CONTROL  
GATE SAFETY  
ALUMINIUM GATES



**TEL.** 0113 201 6677

# SECTION G

# SLIDING GATE

# HARDWARE

CONCRETE-IN TRACK	200
BOLT-DOWN TRACK	202
TRAVEL STOPS	203
BOLT-THROUGH WHEELS	204
RECESS-IN WHEELS	205
BOLT-ON WHEELS	206
GUIDE PLATES	207
MEETING POINTS	209
U-GUIDE CHANNEL	210
GUIDE ROLLERS	211



## ROLLING CENTER OMEGA O-GROOVE CONCRETE-IN SLIDING GATE TRACK

Concrete-in ground track for sliding gates and industrial doors, **20mm** round for O groove wheels, supplied in modular **3m** lengths, galvanised finish with **3mm** hard carbon steel top rail. **53NO** joint pin supplied separately.



### CONCRETE-IN SLIDING GATE TRACK - 3m length, supporting up to 1200kg


OMEGA3NEW

Galvanised - 3m - concrete-in sliding gate track - up to 1200kg

#### SPARES & ACCESSORIES

53NO

Galvanised Omega track joint pin

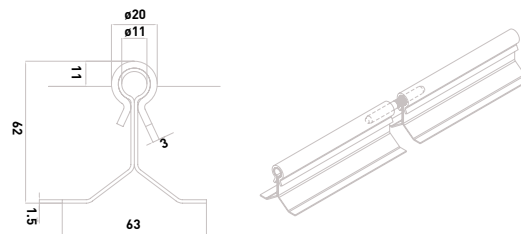

NEWOMEGA				
REFERENCE	LENGTH (mt)	DESCRIPTION / FINISH	GATE MAX WEIGHT	WEIGHT
NEW OMEGA Z3	3	TRACK GALVANISED	1200 KG	10.0 KG
53 NO	-	JOINT PIN GALVANISED	-	0.10 KG



## ROLLING CENTER IBBI O-GROOVE CONCRETE-IN SLIDING GATE TRACK

Galvanised concrete-in ground track for sliding gates. 20mm round to suit



### CONCRETE-IN SLIDING GATE TRACK - 3m length, supporting up to 1000kg


IBBIZ 3/4

Galvanised - 3m - concrete-in sliding gate track - up to 1000kg

#### SPARES & ACCESSORIES

RAPIDA

IBBI track joint plate

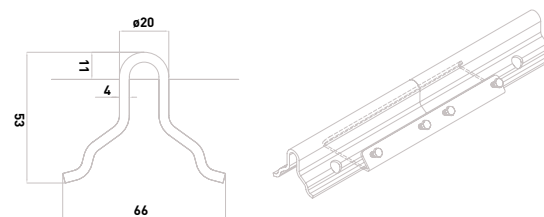

IBBI				
REFERENCE	LENGTH (mt)	DESCRIPTION / FINISH	GATE MAX WEIGHT	WEIGHT
IBBI Z 3/4	3	TRACK GALVANISED	1000 KG	10.4 KG
RAPIDA	-	JOINT PLATE GALVANISED	-	0.60 KG

**NICE  
ROBUS KIT 3  
SLIDING GATE KIT  
UP TO 1000KG**



Turn to page **12**



### CONCRETE-IN SLIDING GATE TRACK - 3m length, supporting up to 700kg


SISTEMA Z3

Galvanised - 3m - concrete-in sliding gate track - up to 700kg

#### SPARES & ACCESSORIES

53

Sistema track joint pin

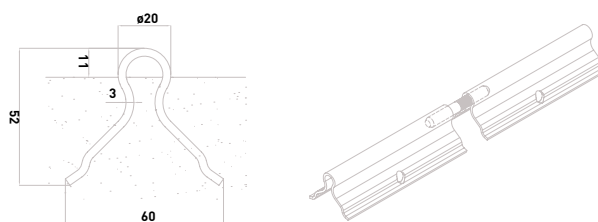

Dimensions in: mm				
SISTEMA				
REFERENCE	LENGTH (mt)	DESCRIPTION / FINISH	GATE MAX WEIGHT	WEIGHT
SISTEMA Z3	3	TRACK GALVANISED	700 KG	8.60 KG
53	-	JOINT PLATE GALVANISED	-	0.50 KG



### ROLLING CENTER SISTEMA O-GROOVE CONCRETE-IN SLIDING GATE TRACK

Concrete-in ground track for sliding gates and industrial doors, **20mm** round for O groove wheels, supplied in modular **3m** lengths, galvanised finish. Multiple lengths are precisely aligned using the new **rapida** quick fix joint.



### HEAVY DUTY CONCRETE-IN SLIDING GATE TRACK - 3m length, supporting up to 3000kg


HEAVY Z3

Heavy duty galvanised - 3m - concrete-in sliding gate track - up to 3000kg

#### SPARES & ACCESSORIES

53/1

Heavy track joint plate



Dimensions in: mm				
HEAVY				
REFERENCE	LENGTH (mt)	DESCRIPTION / FINISH	GATE MAX WEIGHT	WEIGHT
HEAVY Z3	3	TRACK GALVANISED	3000 KG	16.47 KG
53/1	-	JOINT PLATE GALVANISED	-	0.36 KG



### ROLLING CENTER HEAVY HEAVY DUTY O-GROOVE CONCRETE-IN SLIDING GATE TRACK

Flush-lay concrete-in ground track for heavy sliding gates and industrial doors, **20mm** solid round bar for O groove wheels, in **3m** modular lengths, galvanised finish. Alignment bracket supplied separately **53/1**.

**WE STOCK A WIDE RANGE OF ASO SAFETY PRODUCTS WE SUPPLY MADE TO MEASURE EDGES & COMPONENTS AT COMPETITIVE PRICES**

Please get in touch with your requirements.



## ROLLING CENTER FLOOR O-GROOVE BOLT-DOWN SLIDING GATE TRACK

Formed from one continuous piece of **3.5mm** structural grade steel, better suited to applications where welding to other steel work is required. Also available in a V profile (**ANGULA**).


**20mm** round for O groove wheels, supplied in modular **3m** lengths, galvanised finish



### BOLT-DOWN SLIDING GATE TRACK - 3m length, supporting up to 500kg

FLOOR Z3

Galvanised - 3m - bolt-down sliding gate track - up to 500kg

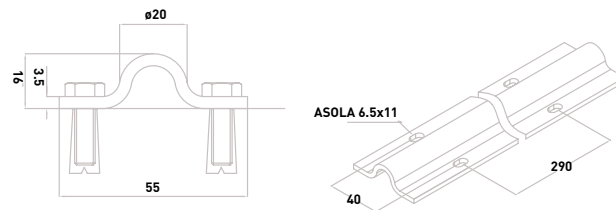

Dimensions in: mm		FLOOR		
REFERENCE	LENGTH (mt)	DESCRIPTION / FINISH	GATE MAX WEIGHT	WEIGHT
FLOOR Z3	3	TRACK GALVANISED	500 KG	5.32 KG



## THE FOCUS ON INNOVATIONS

NEW 2022 GATE HARDWARE CATALOGUE  
AVAILABLE NOW CALL TODAY FOR YOUR FREE COPY

Or download from our website [www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)





## ROLLING CENTER WELD-ON TRAVEL STOP


### WELD-ON TRAVEL STOP

**F 30 Z**

Travel stop - galvanised - weld-on - with 30mm diameter with rubber stop

**F 40 Z**

Travel stop - galvanised - weld-on - with 40mm diameter with rubber stop

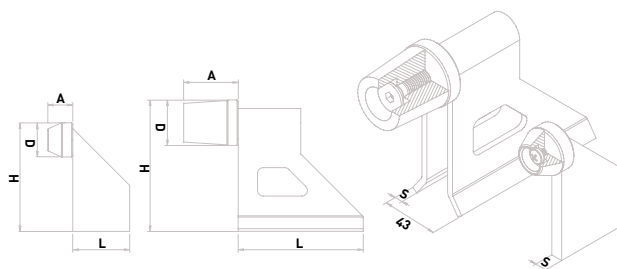

Dimensions in: mm

#### WELD-ON TRAVEL STOPS

REFERENCE	D Ø	L	H	A	S	WEIGHT
F 30 Z	30	50	95	23	8	0.28 KG
F 40 Z	40	110	120	45	4	0.66KG




## ROLLING CENTER BOLT-DOWN TRAVEL STOP

### BOLT-ON TRAVEL STOP

**F 40 SZ**

Travel stop - galvanised - bolt-on - with 40mm diameter with rubber stop

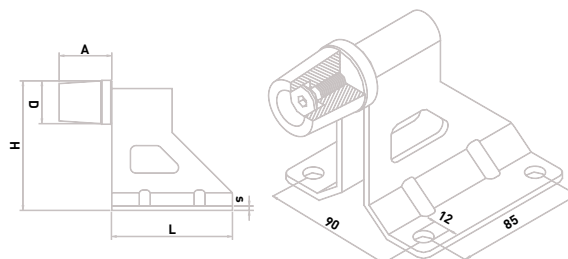

Dimensions in: mm

#### WELD-ON TRAVEL STOPS

REFERENCE	D Ø	L	H	A	S	WEIGHT
F 40 SZ	40	110	120	45	4	0.88 KG

**MORE TRAVEL  
STOPS  
AVAILABLE**

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)  
or call 0113 201 6677 for  
more information.




## ROLLING CENTER

### 1 BEARING O-GROOVE BOLT-THROUGH SLIDING GATE WHEEL FOR 20MM TRACKS



#### BOLT-THROUGH O-GROOVE WHEEL - 1 Bearing

8270	Yellow galvanised - bolt-through wheel - single bearing - 80mm diameter
10270	Yellow galvanised - bolt-through wheel - single bearing - 100mm diameter
12270	Yellow galvanised - bolt-through wheel - single bearing - 120mm diameter



SINGLE BEARING O-GROOVE BOLT-THROUGH WHEEL									
REFERENCE	D Ø	d Ø	A	B	C Ø	F (thread)	MIN BOX LxHxS	CAPACITY (kg)	WEIGHT
827 0	80	62	26	34	21	M14 x 60	80 x 40 x 3	190	0.75 KG
1027 0	100	81	26	34	21	M14 x 60	100 x 40 x 3	240	1.29 KG
1227 0	120	101	26	34	21	M14 x 60	120 x 40 x 3	270	1.93 KG


## ROLLING CENTER

### 2 BEARING O-GROOVE BOLT-THROUGH SLIDING GATE WHEEL FOR 20MM TRACKS



#### BOLT-THROUGH O-GROOVE WHEEL - 2 Bearing

8300	Yellow galvanised - bolt-through wheel - double bearing - 80mm diameter
10300	Yellow galvanised - bolt-through wheel - double bearing - 100mm diameter
12300	Yellow galvanised - bolt-through wheel - double bearing - 120mm diameter



DOUBLE BEARING O-GROOVE BOLT-THROUGH WHEEL									
REFERENCE	D Ø	d Ø	A	B	C Ø	F (thread)	MIN BOX LxHxS	CAPACITY (kg)	WEIGHT
830 0	80	60	30	44	21	M14 x 70	80 x 50 x 3	380	1.21 KG
1030 0	100	80	30	44	21	M14 x 70	100 x 50 x 3	450	1.49 KG
1230 0	120	100	30	44	21	M14 x 70	120 x 50 x 3	480	2.23 KG

#### ROLLING CENTER COMPOSITE FENCE BOARDS



Turn to page **258**






**ROLLING CENTER**  
1 BEARING  
O-GROOVE RECESS-IN  
SLIDING GATE WHEEL  
FOR 20MM TRACKS

### RECESS-IN O-GROOVE WHEEL - 1 Bearing

827PS0	Yellow galvanised - recess-in wheel - single bearing - 80mm diameter
1027PS0	Yellow galvanised - recess-in wheel - single bearing - 100mm diameter
1226PS0	Yellow galvanised - recess-in wheel - single bearing - 120mm diameter

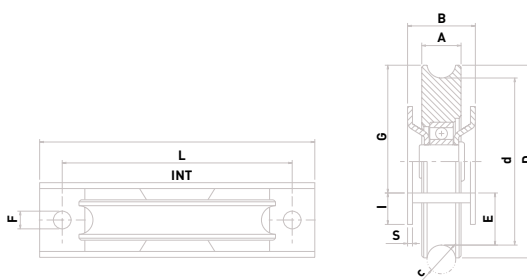

Dimensions in: mm

#### SINGLE BEARING O-GROOVE RECESS-IN WHEEL


REFERENCE	D Ø	d Ø	A	B	C Ø	G	I	E	S	L	INT. x F	CAPACITY (kg)	WEIGHT
827 PS0	80	61	26	34	21	59	16	15	2.5	140	117 x Ø9	190	0.85 KG
1027 PS0	100	81	26	34	21	69	16	25	2.5	140	117 x Ø9	240	1.29 KG
1226 PS0	120	101	26	34	21	88	17	21	3	186	150 x Ø9	270	2.1 KG



**ROLLING CENTER**  
2 BEARING  
O-GROOVE RECESS-IN  
SLIDING GATE WHEEL  
FOR 20MM TRACKS

### RECESS-IN O-GROOVE WHEEL - 2 Bearing

826PS0	Yellow galvanised - recess-in wheel - double bearing - 80mm diameter
1026PS0	Yellow galvanised - recess-in wheel - double bearing - 100mm diameter
1227PS0	Yellow galvanised - recess-in wheel - double bearing - 120mm diameter

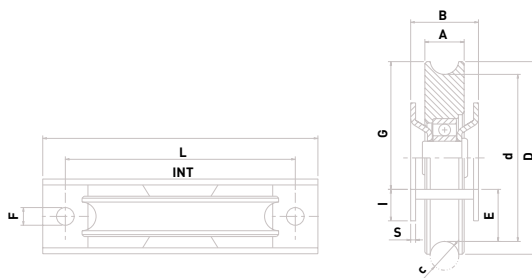

Dimensions in: mm

#### DOUBLE BEARING O-GROOVE RECESS-IN WHEEL

REFERENCE	D Ø	d Ø	A	B	C Ø	G	I	E	S	L	INT. x F	CAPACITY (kg)	WEIGHT
826 PS0	80	60	26	34	21	58	12	11	2.5	140	117 x Ø9	280	0.93 KG
1026 PS0	100	80	26	34	21	68	12	21	2.5	140	117 x Ø9	340	1.36 KG
1227 PS0	120	100	26	34	21	88	14	25.5	3	185	151 x Ø9	430	2.25 KG

**NICE & BENINCA**  
SLIDING GATE  
AUTOMATION

See page 8



ROLLING CENTER  
1 OR 2 BEARING  
O-GROOVE BOLT-ON  
SLIDING GATE WHEEL  
FOR 20MM TRACKS




BOLT-ON O-GROOVE WHEEL - 1 & 2 Bearing

827PCO

Yellow galvanised - bolt-on wheel - single bearing - 80mm diameter

1030PCO

Yellow galvanised - bolt-on wheel - double bearing - 100mm diameter

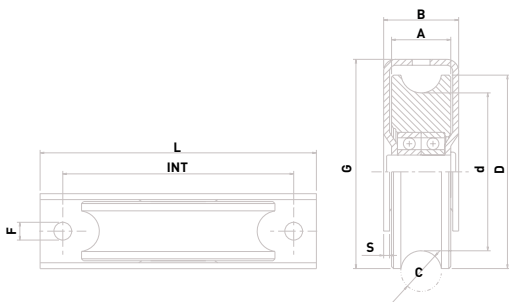

DOUBLE BEARING O-GROOVE BOLT-ON WHEEL											
REFERENCE	D Ø	d Ø	A	B	C Ø	G	S	L	INT. x F	CAPACITY (kg)	WEIGHT
827 PCO	80	62	26	36	21	82	3	120	90 x ø9	190	1.02 KG
1030 PCO	100	80	30	38	21	106	3	140	108 x ø9	350	1.89 KG

Your  
Gates Are  
Safe In Our  
Hands

GATE  
HARDWARE  
EXPERTS




**ROLLING CENTER**  
**2RGZ**  
WALL MOUNT  
SLIDING GATE GUIDE  
PLATE WITH ROLLERS

**GUIDE PLATE WITH ROLLERS - 37-106mm adjustable**

2RGZ

Galvanised - adjustable guide plate - with 2 rollers - wall mount

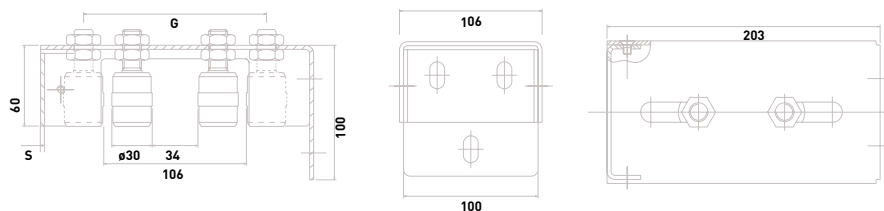

Dimensions in: mm

**SLIDING GATE GUIDE PLATE**

REFERENCE	S	G (min/max)	ROLLERS (n°)	ROLLERS (type)	WEIGHT
2 RG Z	3	106 / 37	2	CN30	1.4 KG




**ROLLING CENTER**  
**2RGGZ**  
POST MOUNT  
SLIDING GATE GUIDE  
PLATE WITH ROLLERS

**RECESS-IN O-GROOVE WHEEL - 78-112mm adjustable**

2RGGZ

Galvanised - adjustable guide plate - with 2 rollers - post mount

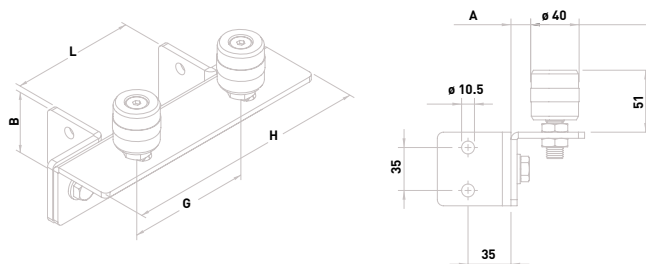

Dimensions in: mm

**SLIDING GATE GUIDE PLATE**

REFERENCE	L	H	G	A	B	ROLLERS Ø	ROLLERS (h)	WEIGHT
2 RGG Z	78-112	240	120	8 ÷ 22	60	40	40	2.1 KG

**SLIDING GATE  
TRACKS**

See page **200**



**ROLLING CENTER**  
**4RM / 4RG**  
 POST MOUNT  
 SLIDING GATE GUIDE PLATE  
 WITH ROLLERS




**MEDIUM GUIDE PLATE WITH ROLLERS - Adjustable**

4RM

Galvanised - medium - adjustable guide plate - 35-53mm - with 4 rollers

4RG

Galvanised - large - adjustable guide plate - 55-105mm - with 4 rollers

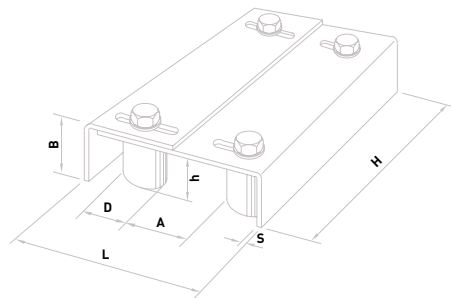

MEDIUM SLIDING GATE GUIDE PLATE WITH ROLLERS								
REFERENCE	L	H	S	A (min/max)	B	ROLLERS Ø	ROLLERS (h)	WEIGHT
4 RM	120 ÷ 160	220	3	35 / 53	58	30	40	2.17 KG
4 RG	195 ÷ 245	350	4	55 / 105	68	40	40	5.25 KG

**ROLLING CENTER**  
**4RMR / 4RGR**  
 POST OR WALL MOUNT  
 SLIDING GATE GUIDE PLATE  
 WITH ROLLERS




**LARGE GUIDE PLATE WITH ROLLERS - Adjustable**

4RMR

Galvanised - medium - adjustable guide plate - 0-90mm - with 4 rollers

4RGR

Galvanised - large - adjustable guide plate - 0-120mm - with 4 rollers



LARGE SLIDING GATE GUIDE PLATE WITH ROLLERS											
REFERENCE	A (min/max)	b	B	ROLLERS Ø	ALT ROL Ø	HOLES	E	D	H	L	WEIGHT
4 RM R	0 ÷ 90	70	110	30	40	30 x 10	85	145	220	175	2.8 KG
4 RG R	0 ÷ 120	80	150	40	40	35 x 10	150	175	300	230	5.3 KG

**CANTILEVER GATE  
KITS**


See page **216**



**ROLLING CENTER  
50R P/S**  
POST MOUNT  
SLIDING GATE  
ADJUSTABLE MEETING  
POINT WITH ROLLERS

**ADJUSTABLE MEETING POINT WITH ROLLERS** - Adjustable, post mount

50 RP	Yellow galvanised - adjustable meeting point - 40-80mm - with 2 rollers
50 RS	Yellow galvanised - adjustable meeting point - 80-150mm - with 2 rollers

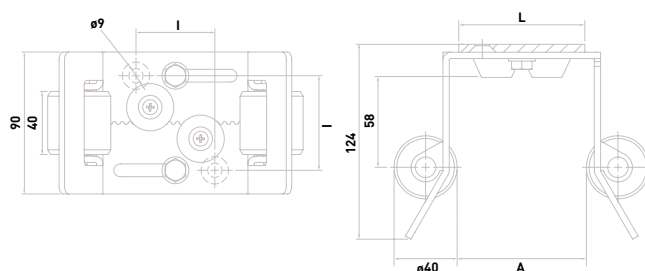

ADJUSTABLE MEETING POINT WITH ROLLERS				
REFERENCE	A	lxl	L	WEIGHT
50 RP	40 ÷ 80	20 x 60	60	1.2 KG
50 RS	80 ÷ 150	50 x 60	80	1.32 KG



**ROLLING CENTER  
50S**  
POST MOUNT  
SLIDING GATE TOP  
ADJUSTABLE MEETING POINT

**TOP ADJUSTABLE MEETING POINT** - Adjustable

50S	Yellow galvanised - adjustable top meeting point - 44-84mm
-----	--

TOP ADJUSTABLE MEETING POINT				
REFERENCE	A	S	L	WEIGHT
50 S	44 ± 84	4	40	0.72 KG

## ROLLING CENTER WHATSAPP TECHNICAL

Scan the QR code for instant help





## ROLLING CENTER

### 58

#### U-GUIDE CHANNEL FOR SLIDING GATES



#### U-GUIDE CHANNEL - 40 - 80mm internal dimension

58/40Z	Galvanised - U-guide channel - 3m - for 40mm rollers
58/40G	Non-galvanised - U-guide channel - 3m - for 40mm rollers
58/48Z	Galvanised - U-guide channel - 3m - for 48mm rollers
58/48G	Non-galvanised - U-guide channel - 3m - for 48mm rollers
58/60Z	Galvanised - U-guide channel - 3m - for 60mm rollers
58/60G	Non-galvanised - U-guide channel - 3m - for 60mm rollers
58/65Z	Galvanised - U-guide channel - 3m - for 65mm rollers
58/65G	Non-galvanised - U-guide channel - 3m - for 65mm rollers
58/70Z	Galvanised - U-guide channel - 3m - for 70mm rollers
58/70G	Non-galvanised - U-guide channel - 3m - for 70mm rollers
58/80Z	Galvanised - U-guide channel - 3m - for 80mm rollers
58/80G	Non-galvanised - U-guide channel - 3m - for 80mm rollers



Dimensions in: mm					
U-GUIDE CHANNEL					
REFERENCE	L	H	S	FINISH / LENGTH	WEIGHT
58/40Z	42	35	3	GALVANISED / 3M	7.80 KG
58/40G	42	35	3	NON-GALVANISED / 3M	7.80 KG
58/48Z	50	35	3	GALVANISED / 3M	8.50 KG
58/48G	50	35	3	NON-GALVANISED / 3M	8.50 KG
58/60Z	62	40	3	GALVANISED / 3M	10.00 KG
58/60G	62	40	3	NON-GALVANISED / 3M	10.00 KG
58/65Z	67	40	3	GALVANISED / 3M	10.50 KG
58/65G	67	40	3	NON-GALVANISED / 3M	10.50 KG
58/70Z	72	40	3	GALVANISED / 3M	10.95 KG
58/70G	72	40	3	NON-GALVANISED / 3M	10.95 KG
58/80Z	82	45	3	GALVANISED / 3M	12.00 KG
58/80G	82	45	3	NON-GALVANISED / 3M	12.00 KG

**WE HAVE A FULL RANGE OF ACCESS CONTROL SOLUTIONS AVAILABLE AT COMPETITIVE PRICES**


If you don't see what you're looking for call us on 0113 201 6677 or email [Info@rollingcenter.co.uk](mailto:Info@rollingcenter.co.uk)



**ROLLING CENTER  
RNF  
NYLON GUIDE ROLLERS  
WITH BEARING FOR  
U-GUIDE CHANNEL**

**NYLON GUIDE ROLLERS WITH BEARING - 40 - 80mm diameter**

RNF 40	Nylon - roller with bearings - 40mm diameter - M14 thread
RNF 48	Nylon - roller with bearings - 48mm diameter - M14 thread
RNF 60	Nylon - roller with bearings - 60mm diameter - M20 thread
RNF 65	Nylon - roller with bearings - 65mm diameter - M20 thread
RNF 70	Nylon - roller with bearings - 70mm diameter - M20 thread
RNF 80	Nylon - roller with bearings - 80mm diameter - M20 thread



Dimensions in: mm

**NYLON GUIDE ROLLER**

REFERENCE	D Ø	A	F (thread)	NUT Ø	LE	L	WEIGHT
RNF 40	40	15	M 14 x 40	17	8	64	0.13 KG
RNF 48	48	15	M 14 x 40	17	8	64	0.14 KG
RNF 60	60	19	M 20 x 40	22	13	72	0.31 KG
RNF 65	65	19	M 20 x 40	22	13	72	0.33 KG
RNF 70	70	19	M 20 x 40	22	13	72	0.34 KG
RNF 80	80	23	M 20 x 40	22	10	73	0.42 KG

**GATE SAFETY  
PRODUCTS**

See page 59



# ALUMINIUM GATES

High quality, extensive range from the premier French aluminium gate manufacturer, with over 60 years of industry experience.






## ROLLING CENTER CN BLACK NYLON ROLLERS WITHOUT BEARINGS



### BLACK NON-BEARING NYLON ROLLERS - 25-42mm diameter

CN 25	Black nylon - no bearings roller - 25mm diameter - M14 thread
CN 28	Black nylon - no bearings roller - 28mm diameter - M14 thread
CN 30	Black nylon - no bearings roller - 30mm diameter - M14 thread
CN 32	Black nylon - no bearings roller - 32mm diameter - M14 thread
CN 40	Black nylon - no bearings roller - 40mm diameter - M20 thread
CN 42	Black nylon - no bearings roller - 42mm diameter - M20 thread
CN 40/M14	Black nylon - no bearings roller - 40mm diameter - M14 thread
CN 60	Black nylon - no bearings roller - 60mm diameter - M20 thread



Dimensions in: mm					
BLACK NYLON GUIDE ROLLER					
REFERENCE	D Ø	H	L Ø	F (thread)	WEIGHT
CN 25	25	40	71	M 14	0.134 KG
CN 28	28	40	71	M 14	0.14 KG
CN 30	30	40	71	M 14	0.144KG
CN 32	32	40	71	M 14	0.148KG
CN 40	40	60	96	M 20	0.385 KG
CN 42	42	60	96	M 20	0.395 KG
CN 40/M14	40	40	73	M 14	0.175 KG
CN 60	60	60	96	M 20	0.525 KG

Rolling Center Tech Support  
WhatsApp Business Account



## NEED TECHNICAL?

Contact us on  
**WhatsApp**  
**0113 201 6672**  
for instant support

Alternatively scan the **QR**





Handwriting practice area with horizontal dashed lines.

# '22

2022 TRADE CATALOGUE

GATE HARDWARE  
GATE AUTOMATION  
ACCESS CONTROL  
GATE SAFETY  
ALUMINIUM GATES

**TEL.** 0113 201 6677

# SECTION H


# CANTILEVER GATE HARDWARE

GATE KITS	216
GATE CARRIAGES	221
SUPER SILENT GATE KITS	223
SUPER SILENT CARRIAGES	227
SUPPORT WHEELS	229
MEETING POINTS	230
TENSION ROD	231
FIXING KITS	232
GUIDE ROLLERS	232
CANTILEVER TRACK CHART	233



## ROLLING CENTER MINI CANTILEVER KITS


2 x CA4RPS 8 wheeled carriages  
2 x 50B Meeting points  
2 x 41B/SPEC Support wheels  
GIPI4 RPZ6/3 6 or 3m galvanised track  
GIPI4 RP6/3 6 or 3m non-galvanised track

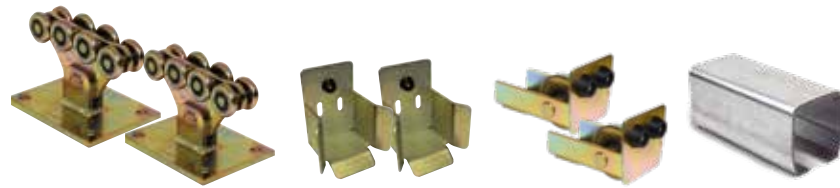

### CANTILEVER KITS - For gates up to 6m clear opening. Max weight 450kg

MINIKIT 1	6m cantilever kit - up to 450kg - with 1x 6m galvanised track
MINIKIT 2	6m cantilever kit - up to 450kg - with 2x 3m galvanised tracks
MINIKIT 4	6m cantilever kit - up to 450kg - with 1x 6m non-galvanised track
<b>MINI CANTILEVER TRACKS</b>	
GIPI4 RPZ6	6m mini galvanised cantilever track
GIPI4 RPZ3	3m mini galvanised cantilever track
GIPI4 RP6	6m mini non-galvanised cantilever track
GIPI4 RP3	3m mini non-galvanised cantilever track
<b>MINI CANTILEVER COMPONENTS</b>	
CA4RPS	8 wheeled mini carriage
50B	Meeting point
41B/SPEC	Support wheel

### TECHNICAL INFO:

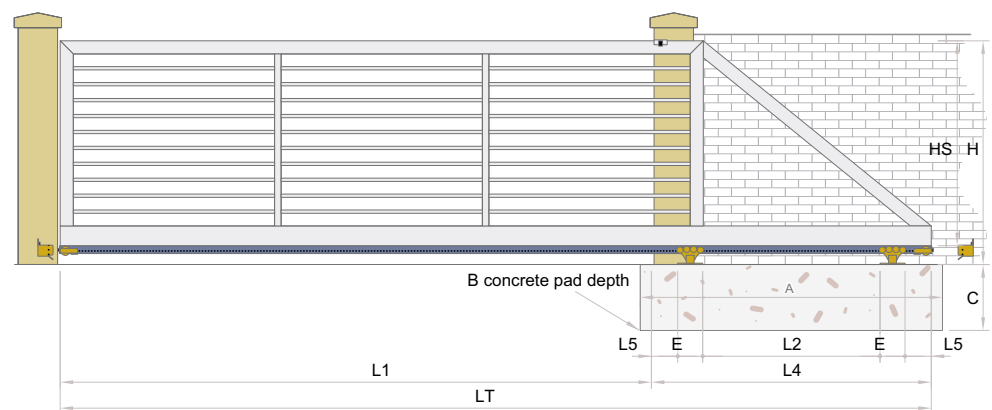

$$\Sigma LT = L1 + L4 \mid L5 = 30\% \div L1 \mid L4 = L2 + (E + L5) \times 2$$

Dimensions in: <b>mt</b>					<b>MINI</b>						
<b>GATE MAX WEIGHT</b>	<b>L1</b>	<b>L2</b>	<b>L4</b>	<b>L5</b>	<b>LT</b>	<b>H</b>	<b>E</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>CARRIAGE STRENGTH</b>
450 KG	3.0	0.9	1.66	0.2	4.7	1.7	0.19	1.8	0.6	0.5	900 KG
450 KG	4.0	1.2	1.96	0.2	6.0	1.7	0.19	2.0	0.6	0.5	900 KG
450 KG	5.0	1.5	2.26	0.2	7.3	1.7	0.19	2.3	0.8	0.5	900 KG
450 KG	6.0	1.8	2.56	0.2	8.6	1.7	0.19	2.6	0.8	0.5	900 KG

### GATE SAFETY PRODUCTS

See page 59



### CANTILEVER KITS - For gates up to 8m clear opening. Max weight 600kg

MEDIUMKIT 2	9m cantilever kit - up to 600kg - with 2x 4.5m galvanised tracks
MEDIUMKIT 3	6m cantilever kit - up to 600kg - with 1x 6m galvanised track
MEDIUMKIT 7	6m cantilever kit - up to 600kg - with 1x 6m non-galvanised track
MEDIUMKIT 8	9m cantilever kit - up to 600kg - with 1x 6m & 1x 3m non-galvanised tracks
MEDIUMKIT 9	7.5m cantilever kit - up to 600kg - with 1x 4.5 & 1x 3m galvanised track


#### MEDIUM CANTILEVER TRACKS

GIPI 5 RGZ6	6m medium galvanised cantilever track
GIPI 5 RGZ4.5	4.5m medium galvanised cantilever track
GIPI 5 RGZ3	3m medium galvanised cantilever track
GIPI 5 RG6	6m medium non-galvanised cantilever track
GIPI 5 RG3	3m medium non-galvanised cantilever track

#### MEDIUM CANTILEVER COMPONENTS

CA4RS	8 wheeled medium carriage
50P	Meeting point
41P/SPEC	Support wheel

### TECHNICAL INFO:

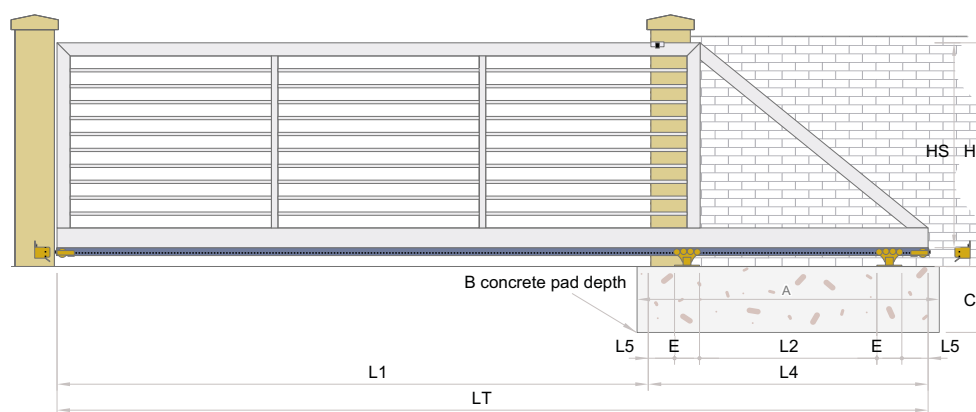

$$\Sigma LT = L1 + L4 \quad | \quad L5 = 30\% \div L1 \quad | \quad L4 = L2 + (E + L5) \times 2$$


MEDIUM											
GATE MAX WEIGHT	L1	L2	L4	L5	LT	H	E	A	B	C	CARRIAGE STRENGTH
600 KG	4.0	1.2	2.2	0.2	6.2	1.7	0.3	2.5	0.6	0.5	1200 KG
600 KG	5.0	1.5	2.5	0.2	7.5	1.7	0.3	2.8	0.6	0.5	1200 KG
600 KG	6.0	1.8	2.8	0.2	8.8	1.7	0.3	3.2	0.6	0.5	1200 KG
600 KG	7.0	2.1	3.1	0.2	10.1	1.7	0.3	3.7	0.6	0.5	1200 KG
600 KG	8.0	2.4	3.4	0.2	11.4	1.7	0.3	3.7	0.6	0.5	1200 KG

**NEED  
ASSISTANCE WITH  
CALCULATING  
YOUR CANTILEVER  
SYSTEM?**


Contact us for assistance  
and details of our online  
cantilever calculator.

**ROLLING CENTER  
H900  
CANTILEVER KITS**

2 x H900-2 8 wheeled carriages  
 2 x 50H Meeting points  
 2 x 41H/SPEC Support wheels  
 GIPI5 RHZ 3 3m galvanised track  
 GIPI5 RHZ 4 4m galvanised track  
 GIPI5 RHZ 6 6m galvanised track

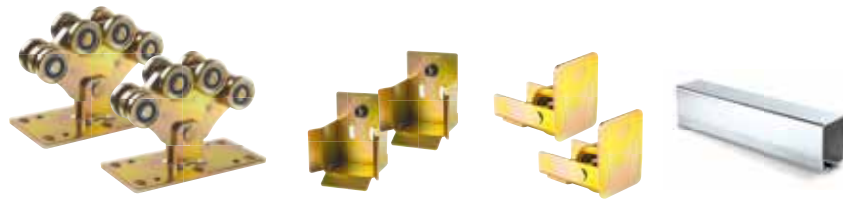**CANTILEVER KITS** - For gates up to 10m clear opening. Max weight 900kg

H900KIT 1	9m cantilever kit - up to 900kg - with 1x 6m & 1x 3m galvanised tracks
H900KIT 2	10m cantilever kit - up to 900kg - with 1x 6m & 1x 4m galvanised tracks
H900KIT 3	12m cantilever kit - up to 900kg - with 2x 6m galvanised tracks
H900KIT 4	15m cantilever kit - up to 900kg - with 2x 6m & 1x 3m galvanised tracks
<b>H900 CANTILEVER TRACKS</b>	
GIPI 5 RHZ3	3m H900 galvanised cantilever track
GIPI 5 RHZ4	4m H900 galvanised cantilever track
GIPI 5 RHZ6	6m H900 galvanised cantilever track
<b>H900 CANTILEVER COMPONENTS</b>	
H900-2	8 wheeled H900 carriage
50H	Meeting point
41H/SPEC	Support wheel

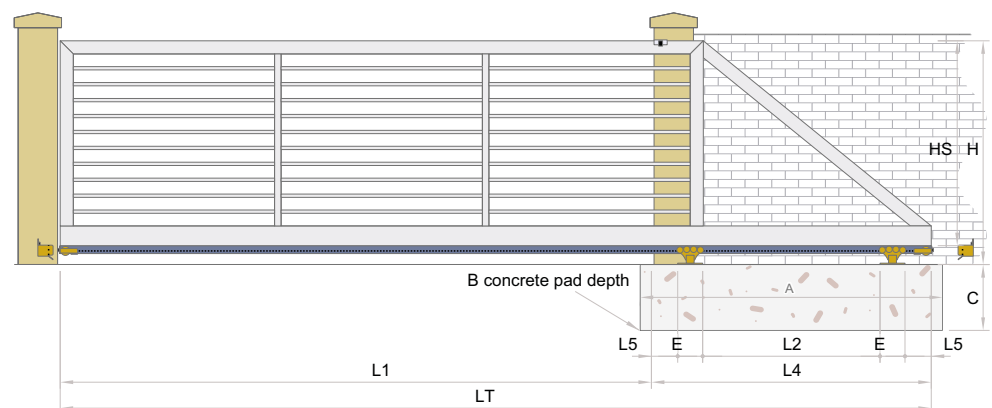**TECHNICAL INFO:**

$$\Sigma LT = L1 + L4 \mid L5 = 30\% \div L1 \mid L4 = L2 + (E + L5) \times 2$$

Dimensions in: <b>mt</b>						<b>H900</b>					
GATE MAX WEIGHT	L1	L2	L4	L5	LT	H	E	A	B	C	CARRIAGE STRENGTH
900 KG	6.0	1.8	2.8	0.2	8.8	1.7	0.3	3.1	0.6	0.5	1800 KG
900 KG	7.0	2.1	3.1	0.2	10.1	1.7	0.3	3.4	0.6	0.5	1800 KG
900 KG	8.0	2.4	3.4	0.2	11.4	1.7	0.3	3.7	0.6	0.5	1800 KG
900 KG	9.0	2.7	3.7	0.2	12.7	1.7	0.3	4.0	0.6	0.5	1800 KG
900 KG	10.0	3.0	4.0	0.2	14.0	1.7	0.3	4.3	0.6	0.5	1800 KG

**NICE  
ROBUS KIT 3  
SLIDING GATE KIT  
UP TO 1000KG**



Turn to page **12**



16M MAX

1200KG

### CANTILEVER KITS - For gates up to 16m clear opening. Max weight 1200kg

MAGNUMKIT 1	12m cantilever kit - up to 1200kg - with 2x 6m galvanised track
MAGNUMKIT 4	9m cantilever kit - up to 1200kg - with 1x 6m & 1x 3m galvanised track
MAGNUMKIT 5	12m cantilever kit - up to 1200kg - with 2x 6m non-galvanised track
MAGNUMKIT 6	9m cantilever kit - up to 1200kg - with 1x 6m & 1x 3m non-galvanised track

#### MAGNUM CANTILEVER TRACKS


GIPI6 RMZ6	6m magnum galvanised cantilever track
GIPI6 RMZ3	3m magnum galvanised cantilever track
GIPI6 RM6	6m magnum non-galvanised cantilever track
GIPI6 RM3	3m magnum non-galvanised cantilever track

#### MAGNUM CANTILEVER COMPONENTS

CA4RMS	8 wheeled magnum carriage
50G	Meeting point
41G/SPEC	Support wheel

**2 x CA4RMS** 8 wheeled carriages  
**2 x 50G** Meeting points  
**2 x 41G/SPEC** Support wheels  
**GIPI6 RMZ 6/3** 6 or 3m galvanised track  
**GIPI6 RM 6/3** 6 or 3m non-galvanised track

### TECHNICAL INFO:

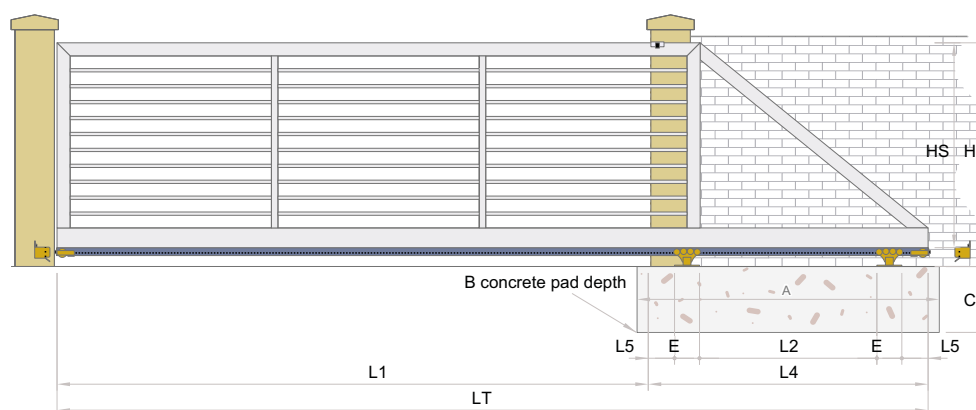

$$\Sigma LT = L1 + L4 \quad | \quad L5 = 30\% \div L1 \quad | \quad L4 = L2 + (E + L5) \times 2$$


MAGNUM											
GATE MAX WEIGHT	L1	L2	L4	L5	LT	H	E	A	B	C	CARRIAGE STRENGTH
1200 KG	9.0	2.7	4.04	0.2	13.0	1.7	0.47	4.2	0.6	0.5	2400 KG
1200 KG	10.0	3.0	4.34	0.2	14.3	1.7	0.47	4.2	0.6	0.5	2400 KG
1200 KG	11.0	3.3	4.64	0.2	15.6	1.7	0.47	4.8	0.8	0.6	2400 KG
1200 KG	12.0	3.6	4.94	0.2	16.9	1.7	0.47	4.8	0.8	0.6	2400 KG
1200 KG	13.0	3.9	5.24	0.2	18.2	1.7	0.47	5.4	0.8	0.6	2400 KG
1200 KG	14.0	4.2	5.54	0.2	19.5	1.7	0.47	5.4	0.8	0.6	2400 KG
1200 KG	15.0	4.5	5.84	0.2	20.8	1.7	0.47	6.0	0.8	0.6	2400 KG
1200 KG	16.0	4.8	6.14	0.2	22.1	1.7	0.47	6.2	0.8	0.6	2400 KG

**NEED ASSISTANCE  
WITH CHOOSING  
THE RIGHT KIT?**

Call us on  
**0113 201 6677** our friendly  
team are here to help.

**ROLLING CENTER  
MAGNUM2  
CANTILEVER KITS**

2 x CA4RMS2 8 wheeled carriages  
 2 x 50G Meeting points  
 2 x 41G/SPEC Support wheels  
 GIPI4 RM2C6 6m hot-dip galvanised track  
 GIPI4 RM2C3 3m hot-dip galvanised track  
 GIPI4 RM26 6m non-galvanised track  
 GIPI4 RM23 3m non-galvanised track

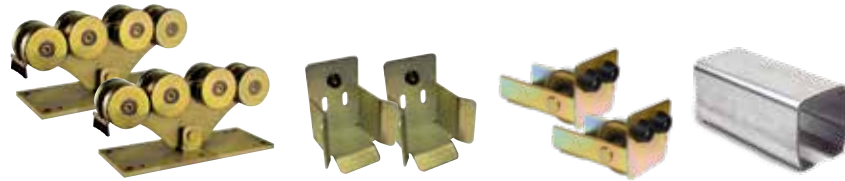**CANTILEVER KITS** - For gates up to 18m clear opening. Max weight 2200kg


MAGNUM2KIT 1	12m cantilever kit - up to 2200kg - with 2x 6m hot-dip galvanised track
MAGNUM2KIT 2	24m cantilever kit - up to 2200kg - with 4x 6m hot-dip galvanised track
MAGNUM2KIT 3	12m cantilever kit - up to 2200kg - with 2x 6m non-galvanised track

**MAGNUM2 CANTILEVER TRACKS**

GIPI4 RM2C6	6m magnum2 hot-dip galvanised cantilever track
GIPI4 RM2C3	3m magnum2 hot-dip galvanised cantilever track
GIPI4 RM26	6m magnum2 non-galvanised cantilever track
GIPI4 RM23	3m magnum2 non-galvanised cantilever track

**MAGNUM2 CANTILEVER COMPONENTS**

CA4RMS2	8 wheeled magnum2 carriage
50G	Meeting point
41G/SPEC	Support wheel

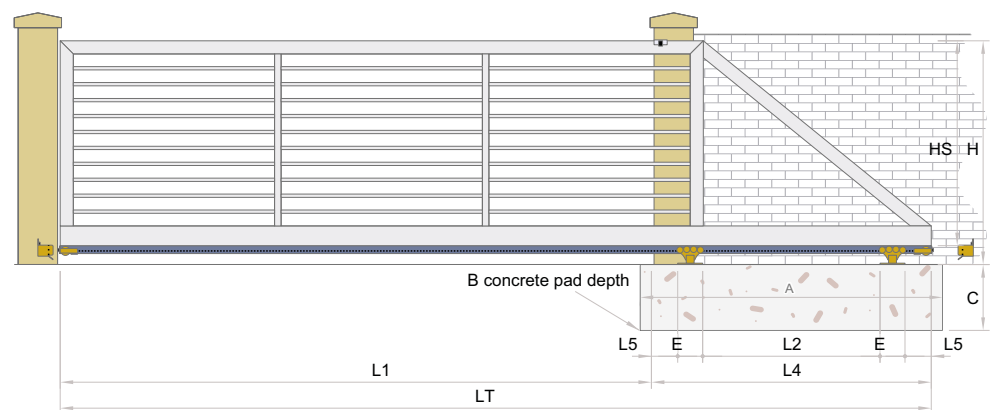**TECHNICAL INFO:**

$$\Sigma LT = L1 + L4 \quad | \quad L5 = 30\% \div L1 \quad | \quad L4 = L2 + (E + L5) \times 2$$



Turn to page 69

MAGNUM2											
Dimensions in: mt	L1	L2	L4	L5	LT	H	E	A	B	C	CARRIAGE STRENGTH
GATE MAX WEIGHT											
2200 KG	9.0	2.7	4.04	0.2	13.0	1.7	0.47	4.2	0.6	0.5	4400 KG
2200 KG	10.0	3.0	4.34	0.2	14.3	1.7	0.47	4.2	0.6	0.5	4400 KG
2200 KG	11.0	3.3	4.64	0.2	15.6	1.7	0.47	4.8	0.8	0.6	4400 KG
2200 KG	12.0	3.6	4.94	0.2	16.9	1.7	0.47	4.8	0.8	0.6	4400 KG
2200 KG	13.0	3.9	5.24	0.2	18.2	1.7	0.47	5.4	0.8	0.6	4400 KG
2200 KG	14.0	4.2	5.54	0.2	19.5	1.7	0.47	5.6	1.0	0.8	4400 KG
2200 KG	15.0	4.5	5.84	0.2	20.8	1.7	0.47	6.0	1.0	0.8	4400 KG
2200 KG	16.0	4.8	6.14	0.2	22.1	1.7	0.47	6.2	1.0	0.8	4400 KG
2200 KG	17.0	5.1	6.44	0.2	23.4	1.7	0.47	6.5	1.0	0.8	4400 KG
2200 KG	18.0	5.4	6.74	0.2	24.7	1.7	0.47	7.0	1.0	0.8	4400 KG






## MINI CANTILEVER CARRIAGES - For gates up to max weight 450kg


CA4RPS

8 wheeled mini carriage

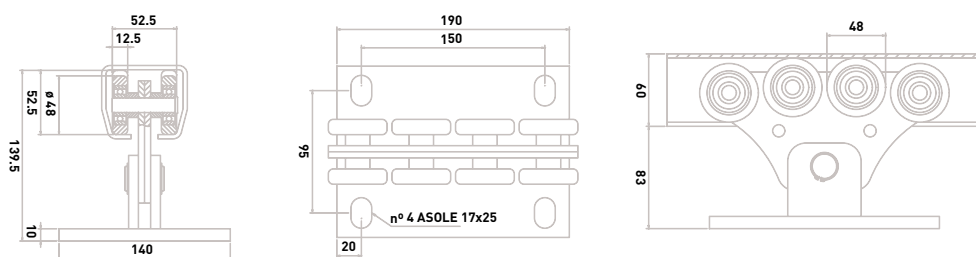

Dimensions in: mm		MINI		
REFERENCE	L1 (ml max)	GATE MAX WEIGHT	CANTILEVER TRACK	WEIGHT (kg)
CA4RPS	3 - 6	450	GIPI 4 RP / RPZ	4.79


**ROLLING CENTER**  
**CA4RPS**  
MINI CANTILEVER  
CARRIAGE



## MEDIUM CANTILEVER CARRIAGES - For gates up to max weight 600kg

CA4RS

8 wheeled medium carriage

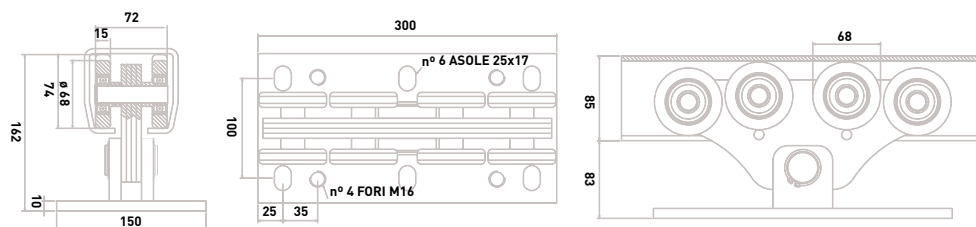

Dimensions in: mm		MEDIUM		
REFERENCE	L1 (ml max)	GATE MAX WEIGHT	CANTILEVER TRACK	WEIGHT
CA4RS	8	600 KG	GIPI 5 RG / GZ	10.5 KG

**ROLLING CENTER**  
**CA4RS**  
MEDIUM CANTILEVER  
CARRIAGE


**ROLLING CENTER**  
**COMPOSITE**  
**FENCE BOARDS**



Turn to page **258**






## ROLLING CENTER H900 CANTILEVER CARRIAGE



### H900 CANTILEVER CARRIAGES - For gates up to max weight 900kg

H900

8 wheeled H900 carriage



Dimensions in: mm				
H900				
REFERENCE	L1 (ml max)	GATE MAX WEIGHT	CANTILEVER TRACK	WEIGHT
H 900	10	900 KG	GIPI 5 RH / HZ	13 KG



## ROLLING CENTER CA4RMS MAGNUM & CA4RMS2 MAGNUM2 CANTILEVER CARRIAGES






### MAGNUM CANTILEVER CARRIAGES - For gates up to max weight 1200-2200kg

CA4RMS

8 wheeled magnum carriage

CA4RMS2

8 wheeled magnum2 carriage

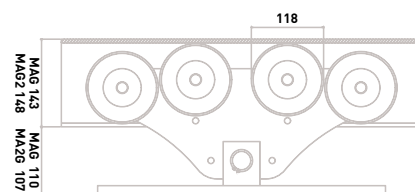

Dimensions in: mm				
MAGNUM				
REFERENCE	L1 (ml max)	GATE MAX WEIGHT	CANTILEVER TRACK	WEIGHT
CA4RMS	16	1200 KG	GIPI 6 RM / MZ	44.6 KG
CA4RMS2	18	2200 KG	GIPI 4 RM2 / M2C	45.2

**LOOKING FOR  
SLIDING GATE  
AUTOMATION  
EQUIPMENT?**

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)  
or call **0113 201 6677** for  
more information.



### SUPER SILENT CANTILEVER KITS - For gates up to 6m clear opening. Max weight 450kg


MINIKIT 3	6m silent cantilever kit - up to 450kg - with 1x 6 galvanised track
MINIKIT 5	6m silent cantilever kit - up to 450kg - with 1x 6m non-galvanised track
<b>SUPER SILENT MINI CANTILEVER TRACKS</b>	
GIPI4 RPZ6	6m mini galvanised cantilever track
GIPI4 RPZ3	3m mini galvanised cantilever track
GIPI4 RP6	6m mini non-galvanised cantilever track
GIPI4 RP3	3m mini non-galvanised cantilever track
<b>SUPER SILENT MINI CANTILEVER COMPONENTS</b>	
SILENT P	8 wheeled super silent mini carriage
50B	Meeting point
41B/SPEC	Support wheel



### ROLLING CENTER SUPER SILENT MINI CANTILEVER KITS

2 x **SILENT P** 8 wheeled carriages  
2 x **50B** Meeting points  
2 x **41B/SPEC** Support wheels  
**GIPI4 RPZ 6/3** 6 or 3m galvanised track  
**GIPI4 RP 6/3** 6 or 3m non- galvanised track

### TECHNICAL INFO:

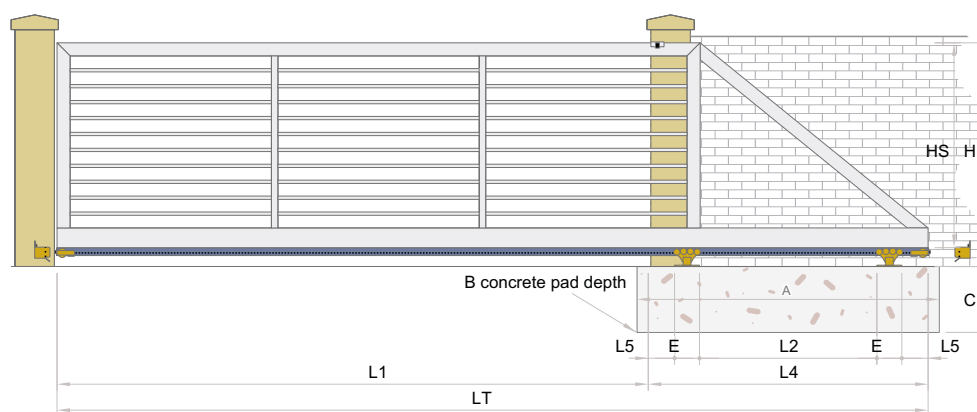

$$\Sigma LT = L1 + L4 \mid L5 = 30\% \div L1 \mid L4 = L2 + (E + L5) \times 2$$

SILENT MINI											
GATE MAX WEIGHT	L1	L2	L4	L5	LT	H	E	A	B	C	CARRIAGE STRENGTH
450 KG	3.0	0.9	1.66	0.2	4.7	1.7	0.19	1.8	0.6	0.5	900 KG
450 KG	4.0	1.2	1.96	0.2	6.0	1.7	0.19	2.0	0.6	0.5	900 KG
450 KG	5.0	1.5	2.26	0.2	7.3	1.7	0.19	2.3	0.8	0.5	900 KG
450 KG	6.0	1.8	2.56	0.2	8.6	1.7	0.19	2.6	0.8	0.5	900 KG

### 35% LESS NOISE.

Thanks to the MAPAR wheels, Super Silent carriages reduce rolling noise in comparison to the traditional carriages.




### FOR INFO ON GATE AUTOMATION SYSTEMS TO WORK WITH THE CANTILEVER KITS

See page 8 for details.



## ROLLING CENTER SUPER SILENT MEDIUM CANTILEVER KITS

2 x **SILENT G** 8 wheeled carriages  
2 x **50P** Meeting points  
2 x **41P/SPEC** Support wheels  
**GIPI5 RGZ 6/3** 6 or 3m galvanised track  
**GIPI5 RGZ 4,5** 4.5m galvanised track

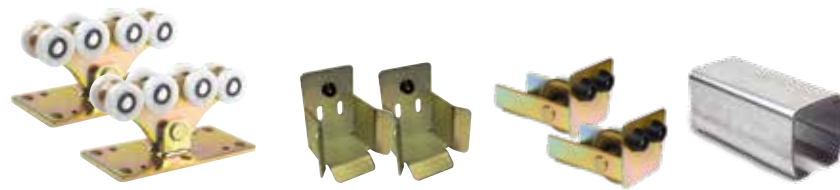

### SUPER SILENT CANTILEVER KITS - For gates up to 8m clear opening. Max weight 600kg

<b>MEDIUMKIT 5</b>	9m silent cantilever kit - up to 600kg - with 1x 6 & 1x 3m galvanised tracks
<b>MEDIUMKIT 6</b>	9m silent cantilever kit - up to 600kg - with 2x 4.5m galvanised track
<b>MEDIUMKIT 10</b>	6m silent cantilever kit - up to 600kg - with 1x 6m galvanised track
<b>MEDIUMKIT 12</b>	7.5m silent cantilever kit - up to 600kg - with 1x 4.5m & 1x 3m galvanised tracks
<b>MEDIUMKIT 14</b>	6m silent cantilever kit - up to 600kg - with 2x 3m galvanised track


### SUPER SILENT MEDIUM CANTILEVER TRACKS


<b>GIPI 5 RGZ6</b>	6m medium galvanised cantilever track
<b>GIPI 5 RGZ4.5</b>	4.5m medium galvanised cantilever track
<b>GIPI 5 RGZ3</b>	3m medium galvanised cantilever track
<b>GIPI 5 RG6</b>	6m medium non-galvanised cantilever track
<b>GIPI 5 RG3</b>	3m medium non-galvanised cantilever track

### SUPER SILENT MEDIUM CANTILEVER COMPONENTS

<b>SILENT G</b>	8 wheeled super silent medium carriage
<b>50P</b>	Meeting point
<b>41P/SPEC</b>	Support wheel

## TECHNICAL INFO:

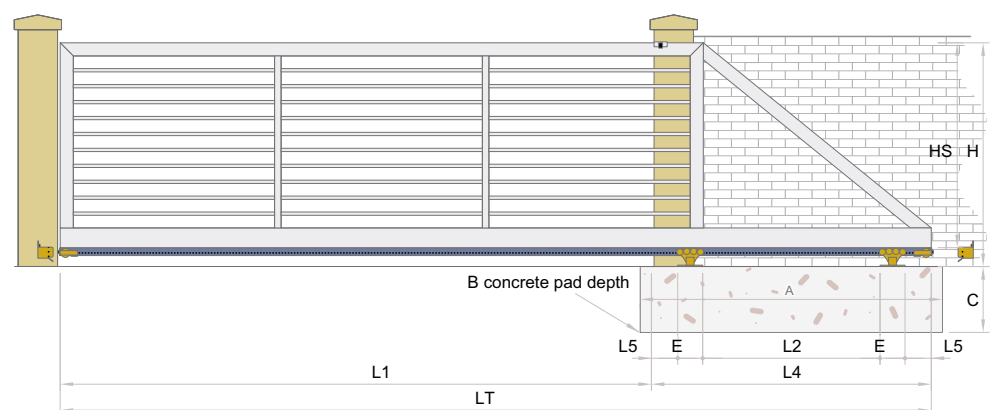

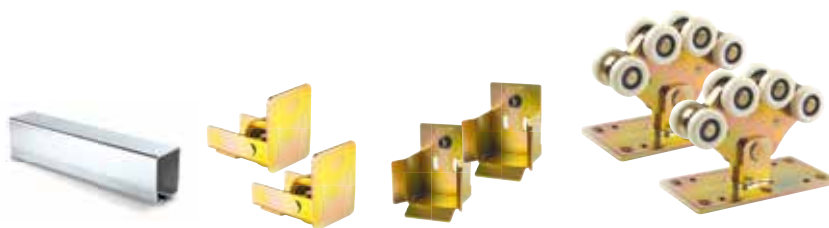

**SUPER SILENT CANTILEVER KITS** - For gates up to 10m clear opening. Max weight 1500kg

H900KIT 5	9m silent cantilever kit - up to 900kg - with 1x 6m & 1x 3m galvanised tracks
H900KIT 6	12m silent cantilever kit - up to 900kg - with 2x 6m galvanised tracks

**SUPER SILENT H900 CANTILEVER TRACKS**

GIPI 5 RHZ3	3m H900 galvanised cantilever track
GIPI 5 RHZ4	4m H900 galvanised cantilever track
GIPI 5 RHZ6	6m H900 galvanised cantilever track

**SUPER SILENT H900 CANTILEVER COMPONENTS**


H900 2S	8 wheeled silent h900 carriage
50H	Meeting point
41H/SPEC	Support wheel



**ROLLING CENTER  
SUPER SILENT H900  
CANTILEVER KITS**

2 x H900-2S 8 wheeled carriages  
2 x 50H Meeting points  
2 x 41H/SPEC Support wheels  
GIPI5 RHZ 3 3m galvanised track  
GIPI5 RHZ 4 4m galvanised track  
GIPI5 RHZ 6 6m galvanised track

**TECHNICAL INFO:**

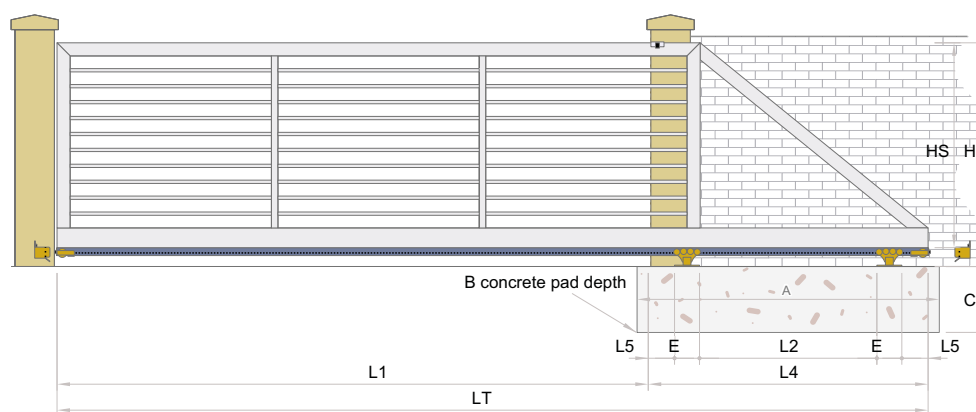

$$\Sigma LT = L1 + L4 \mid L5 = 30\% \div L1 \mid L4 = L2 + (E + L5) \times 2$$

H900 SILENT											
GATE MAX WEIGHT	L1	L2	L4	L5	LT	H	E	A	B	C	CARRIAGE STRENGTH
900 KG	6.0	1.8	2.8	0.2	8.8	1.7	0.3	3.1	0.6	0.5	1800 KG
900 KG	7.0	2.1	3.1	0.2	10.1	1.7	0.3	3.4	0.6	0.5	1800 KG
900 KG	8.0	2.4	3.4	0.2	11.4	1.7	0.3	3.7	0.6	0.5	1800 KG
900 KG	9.0	2.7	3.7	0.2	12.7	1.7	0.3	4.0	0.6	0.5	1800 KG
900 KG	10.0	3.0	4.0	0.2	14.0	1.7	0.3	4.3	0.6	0.5	1800 KG

**LIGHTNESS & EFFICIENCY.**

The lightness of MAPAR wheels means a low rolling strength and a lower level of energy needed to move the gate.



**ROLLING CENTER  
WHATSAPP  
TECHNICAL**


Scan the QR code for instant help





## ROLLING CENTER SUPER SILENT MAGNUM CANTILEVER KITS

**2 x SILENT M** 8 wheeled carriages  
**2 x 50G** Meeting points  
**2 x 41G/SPEC** Support wheels  
**GIPI6 RMZ 6/3** 6 or 3m galvanised track  
**GIPI6 RM 6/3** 6 or 3m non-galvanised track

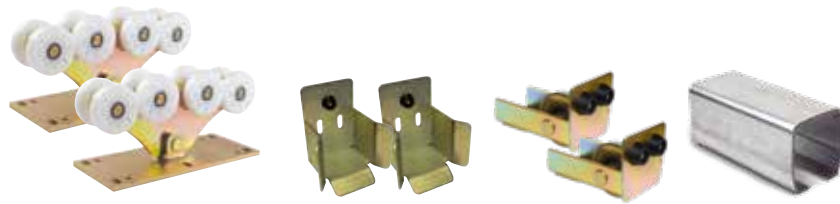

**SUPER SILENT CANTILEVER KITS** - For gates up to 16m clear opening. Max weight 1200kg

MAGNUMKIT 2	12m silent cantilever kit - up to 1200kg - with 2x 6m galvanised track
MAGNUM CANTILEVER TRACKS	
GIPI6 RMZ6	6m magnum galvanised cantilever track
GIPI6 RMZ3	3m magnum galvanised cantilever track
GIPI6 RM6	6m magnum non-galvanised cantilever track
GIPI6 RM3	3m magnum non-galvanised cantilever track
MAGNUM CANTILEVER COMPONENTS	
SILENT M	8 wheeled silent magnum carriage
50G	Meeting point
41G/SPEC	Support wheel


### TECHNICAL INFO:

**CORROSION  
RESISTANT.**

The nylon structure of supersilent carriage wheels has a higher corrosion strength compared to traditional materials.



## COMELIT GSM1-K GSM INTERCOM WITH KEYPAD

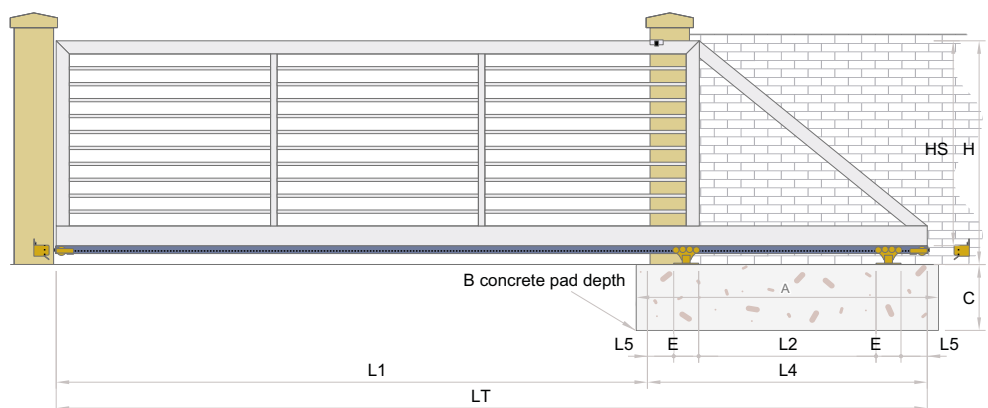Turn to page **134**

$$\Sigma LT = L1 + L4 \quad | \quad L5 = 30\% \div L1 \quad | \quad L4 = L2 + (E + L5) \times 2$$


Dimensions in: <b>mt</b>		<b>SILENT MAGNUM</b>									
<b>GATE MAX WEIGHT</b>	<b>L1</b>	<b>L2</b>	<b>L4</b>	<b>L5</b>	<b>LT</b>	<b>H</b>	<b>E</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>CARRIAGE STRENGTH</b>
1200 KG	9.0	2.7	4.04	0.2	13.0	1.7	0.47	4.2	0.6	0.5	2400 KG
1200 KG	10.0	3.0	4.34	0.2	14.3	1.7	0.47	4.2	0.6	0.5	2400 KG
1200 KG	11.0	3.3	4.64	0.2	15.6	1.7	0.47	4.8	0.8	0.6	2400 KG
1200 KG	12.0	3.6	4.94	0.2	16.9	1.7	0.47	4.8	0.8	0.6	2400 KG
1200 KG	13.0	3.9	5.24	0.2	18.2	1.7	0.47	5.4	0.8	0.6	2400 KG
1200 KG	14.0	4.2	5.54	0.2	19.5	1.7	0.47	5.4	0.8	0.6	2400 KG
1200 KG	15.0	4.5	5.84	0.2	20.8	1.7	0.47	6	0.8	0.6	2400 KG
1200 KG	16.0	4.8	6.14	0.2	22.1	1.7	0.47	6.2	0.8	0.6	2400 KG



### SUPER SILENT MINI CANTILEVER CARRIAGES - For gates up to max weight 450kg


**SILENT P**

8 wheeled mini carriage

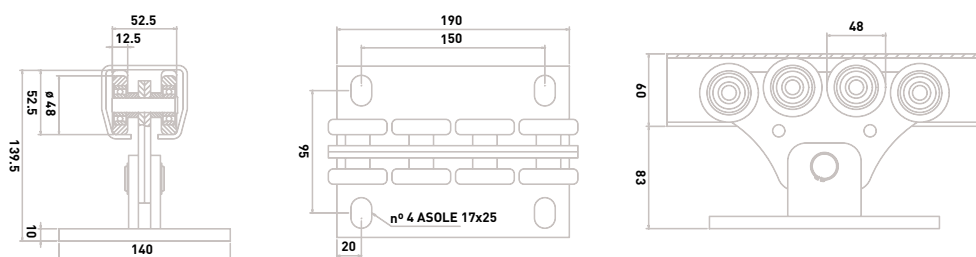

Dimensions in: mm				
REFERENCE	L1 (ml max)	GATE MAX WEIGHT	CANTILEVER TRACK	WEIGHT
SILENT P	6	450	GIPI 4 RP / RPZ	4.12 (KG)


**ROLLING CENTER  
SILENT P**  
SUPER SILENT MINI  
CANTILEVER CARRIAGE



### SUPER SILENT MEDIUM CANTILEVER CARRIAGES - For gates up to max weight 600kg

**SILENT G**

8 wheeled medium carriage

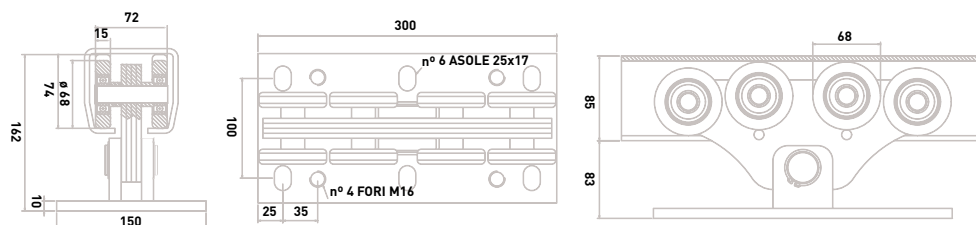


Dimensions in: mm				
REFERENCE	L1 (ml max)	GATE MAX WEIGHT	CANTILEVER TRACK	WEIGHT
SILENT G	8	600 KG	GIPI 5 RG / GZ	9.2 KG

**ROLLING CENTER  
SILENT G**  
SUPER SILENT MEDIUM  
CANTILEVER CARRIAGE








## ROLLING CENTER H900 S SUPER SILENT H900S CANTILEVER CARRIAGE



### SUPER SILENT H900 CANTILEVER CARRIAGES - For gates up to max weight 900kg

H900 S

8 wheeled H900 carriage



Dimensions in: mm				
H900 S				
REFERENCE	L1 (ml max)	GATE MAX WEIGHT	CANTILEVER TRACK	WEIGHT
H 900 S	10	900 KG	GIPI 5 RH / HZ	12 KG






## ROLLING CENTER SILENT M SUPER SILENT MAGNUM CANTILEVER CARRIAGES



### SUPER SILENT MAGNUM CANTILEVER CARRIAGES - For gates up to max weight 1200-2200kg

SILENT M

8 wheeled magnum carriage

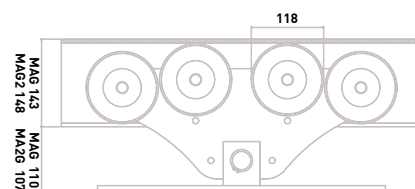


SILENT M				
Dimensions in: mm				
REFERENCE	L1 (ml max)	GATE MAX WEIGHT	CANTILEVER TRACK	WEIGHT
SILENT M	16	1200 KG	GIPI 6 RM / MZ / MA	25.75 KG

**BEA LASER  
CURTAIN SAFETY  
SCANNER**



Turn to page **66**






## ROLLING CENTER CANTILEVER SUPPORT WHEELS

### CANTILEVER SUPPORT WHEELS - For steel & super silent systems

41 B/SPEC	Mini cantilever support wheel
41 P/SPEC	Medium cantilever support wheel
41 H/SPEC	H900 cantilever support wheel
41 G/SPEC	Magnum cantilever support wheel

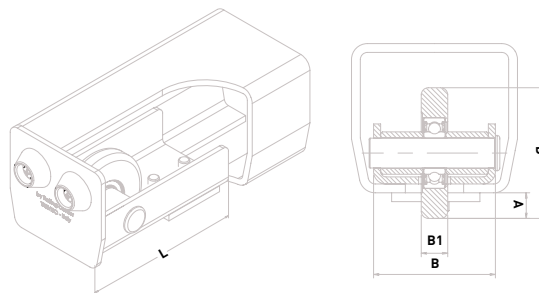

SUPPORT WHEELS								
REFERENCE	B	B1	L	A	T	DØ	CANTILEVER TRACK	WEIGHT
41 B/SPEC	50	15	132	13	12	68	GIPI 4RP / PZ	1.20 KG
41 P/SPEC	69	15	132	14.5	12	74	GIPI 5RG / GZ	1.41 KG
41 H/SPEC	80	23	135	17	-	78	GIPI 5RH / HZ	2.05 KG
41 G/SPEC	106	30	190	18	38	98	GIPI 6RM / MZ	4.23 KG

**REGISTER FOR A  
TRADE ACCOUNT  
TODAY  
TO RECEIVE TRADE  
DISCOUNTS**

Call us on  
**0113 201 6677** our friendly  
team are here to help.




## ROLLING CENTER 50 / L CANTILEVER MEETING POINTS



### CANTILEVER MEETING POINTS - For steel & super silent systems

50 B	Mini cantilever meeting point
50 P	Medium cantilever meeting point
50 H	H900 cantilever meeting point
50 G	Magnum cantilever meeting point
50 BL	Extended mini cantilever meeting point - to accommodate safety edges
50 PL	Extended medium cantilever meeting point - to accommodate safety edges
50 GL	Extended magnum cantilever meeting point - to accommodate safety edges

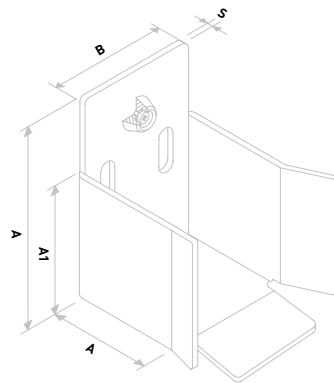

### CAN'T SEE WHAT YOU'RE LOOKING FOR?

Our friendly team are  
here to help.  
Call us on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**

Dimensions in: mm						MEETING POINTS	
REFERENCE	A	A1	B	C	S	CANTILEVER TRACK	WEIGHT
50 B	135	85	87	90	4	GIPI 4RP / PZ	1.2 KG
50 P	161	100	112	90	4	GIPI 5RG / GZ	1.68 KG
50 H	165	95	120	85	4	GIPI 5RH / HZ	1.8 KG
50 G	223	165	152	90	4	GIPI 6RM / MZ	2.8 KG
50 BL	110	85	108	153	4	GIPI 4RP / PZ	1.95 KG
50 PL	120	100	132	178	4	GIPI 5RG / GZ	2.65 KG
50 GL	180	165	181	183	4	GIPI 6RM / MZ	4.4 KG




## THE FOCUS ON INNOVATIONS

NEW 2022 GATE HARDWARE CATALOGUE  
AVAILABLE NOW CALL TODAY FOR YOUR FREE COPY

Or download from our website [www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)






**ROLLING CENTER  
50 RL  
ADJUSTABLE BOTTOM  
CANTILEVER MEETING POINT**

**CANTILEVER ADJUSTABLE MEETING POINT - For steel & super silent systems**

50 RL

Cantilever adjustable meeting points with 40mm Ø rollers

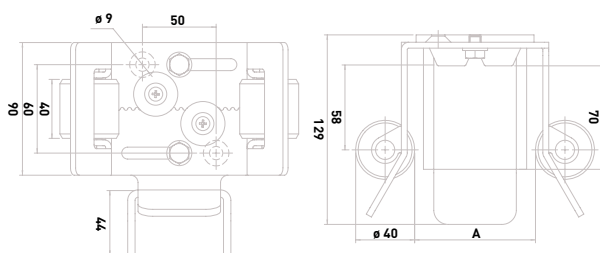

Dimensions in: mm

**ADJUSTABLE MEETING POINT**

REFERENCE	A	lxl	L	WEIGHT
50 RL	80 ÷ 150	50 x 60	-	1.84 KG



**ROLLING CENTER  
GLOECK  
CANTILEVER TENSION ROD**

**CANTILEVER TENSION ROD - For steel & super silent systems**

GLOECK


Cantilever tension rod - for 60 x 60 x 3mm box section

GLOECK 40

Cantilever tension rod - for 40 x 40 x 2.5mm box section

GLOECK 4060

Cantilever tension rod - for 40 x 60 2.5mm box section

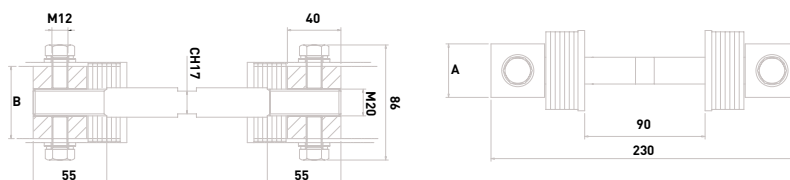

Dimensions in: mm

**GLOECK TENSION ROD**

REFERENCE	BOX SECTION	A	B Ø	WEIGHT
GLOECK	60 X 60 X 3	40	54	1.84 KG
GLOECK 40	40 X 40 X 2.5	35	35	1.16 KG
GLOECK 4060	40 X 60 X 2.5	35	35	1.16 KG

**INTERESTED IN AN  
ALUMINIUM GATE?  
TAKE A LOOK AT  
OUR FULL RANGE OF  
MADE TO MEASURE  
ALUMINIUM GATES**

See page **235** for details




ROLLING CENTER  
CANTILEVER  
FIXING KITS



CANTILEVER FIXING KITS - For steel & super silent systems

PF/B	Mini cantilever fixing kit
PF/P	Medium & H900 cantilever fixing kit
PF/G	Magnum cantilever fixing kit




CANTILEVER FIXING KIT									
REFERENCE	A	B	C	D	E	H	L	S	WEIGHT
PF/B	140	95	190	150	-	250	M16	2	4 KG
PF/P	150	100	300	250	125	250	M16	2	4 KG
PF/G	200	145	470	420	210	250	M16	2	5 KG

ROLLING CENTER  
CANTILEVER  
GUIDE ROLLERS



CANTILEVER ADJUSTABLE & FIXED GUIDE ROLLERS


50 R	Small adjustable cantilever guide roller
50 RM	Large fixed cantilever guide roller

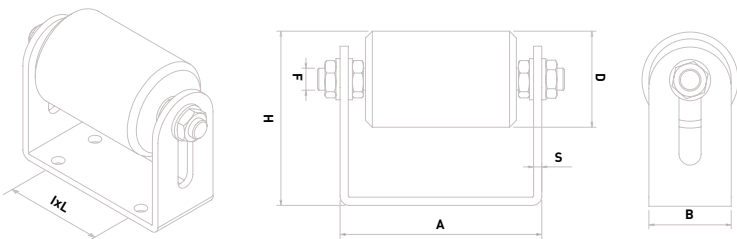

CANTILEVER GUIDE ROLLERS								
REFERENCE	A	B	D	F	H	IxL	S	WEIGHT
50 R	147	60	70	M16	76 ÷ 135	90 x 40 Ø10	6	2 KG
50 RM	220	65	70	Ø20	75	145 x 40 Ø10	8	2.9 KG

FOR ACCESS  
CONTROL  
PRODUCTS







See page 83 for details




## ROLLING CENTER CANTILEVER TRACK COMPARISON CHART

### CANTILEVER TRACK COMPARISON CHART

Dimensions in: mm/mt

		GIPI CANTILEVER TRACK									
REFERENCE		CARRIAGES	L	H	A	B	C	S	FINISH	LENGTH (mt)	WEIGHT
	-	CA4RL SILENT L	-	-	-	-	-	-	-	-	-
	GIPI 4 RLZ 51		69	59	22	52.5	25	3	GALVANISED	5.1	24.3 KG
	GIPI 4 RPZ 3		70	60	22	53	25	3.5	GALVANISED	3	17.03 KG
		CA4RL	70	60	22	53	25	3.5	NON-GALVANISED	3	17.03 KG
	GIPI 4 RPZ 6	CA4RPS SILENT L SILENT P	70	60	22	53	25	3.5	GALVANISED	6	34.12 KG
	GIPI 4 RP 6		70	60	22	53	25	3.5	NON-GALVANISED	6	34.13 KG
	GIPI 5 RGZ 3		94	85	33	73	30	5	GALVANISED	3	35.7 KG
		CA4RS KIT MOTO G SILENT G	94	85	33	73	30	5	NON-GALVANISED	3	35.7 KG
	GIPI 5 RG 6		94	85	33	73	30	5	GALVANISED	6	71.4 KG
	GIPI 5 RGZ 6		94	85	33	73	30	5	GALVANISED	6	71.4 KG
	GIPI 5 RG 6		94	85	33	73	30	5	NON-GALVANISED	6	71.4 KG
	GIPI 5 RHZ 3		101	121	36	86	41	5	GALVANISED	3	35 KG
		H900 H900 S	101	121	36	86	41	5	GALVANISED	4	57.8 KG
	GIPI 5 RHZ 4		101	121	36	86	41	5	GALVANISED	6	86 KG
	GIPI 5 RHZ 6		101	121	36	86	41	5	GALVANISED	6	86 KG
	GIPI 6 RMZ 3		136	143	38	104	55	6	GALVANISED	3	68 KG
		CA4RMS SILENT M	136	143	38	104	55	6	NON-GALVANISED	3	68 KG
	GIPI 6 RM 3		136	143	38	104	55	6	GALVANISED	6	136 KG
	GIPI 6 RMZ 6		136	143	38	104	55	6	GALVANISED	6	136 KG
	GIPI 6 RM 6		136	143	38	104	55	6	NON-GALVANISED	6	136 KG
	GIPI 4 RM2C 3		140	148	38	106	57	8	GALVANISED	3	90 KG
		CA4RMS2	140	148	38	106	57	8	NON-GALVANISED	3	90 KG
	GIPI 4 RM 2/3		140	148	38	106	57	8	NON-GALVANISED	3	90 KG
	GIPI 4 RM2C 6		140	148	38	106	57	8	GALVANISED	6	180 KG
	GIPI 4 RM 2/6		140	148	38	106	57	8	NON-GALVANISED	6	180 KG

# CANTILEVER GATE CONFIGURATOR TOOL AVAILABLE NOW

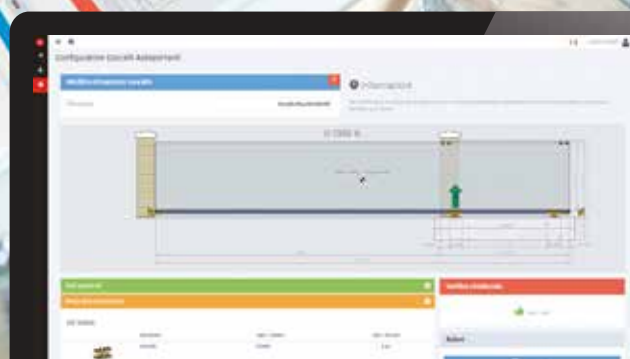

## ONLY ON OUR WEBSITE

# '22

2022 TRADE CATALOGUE

GATE HARDWARE  
GATE AUTOMATION  
ACCESS CONTROL  
GATE SAFETY  
ALUMINIUM GATES



**TEL.** 0113 201 6677

# SECTION I

# ALUMINIUM

# GATES

ALUMINIUM GATES INTRODUCTION	236
ACCORD RANGE	238
ARPEGGIO RANGE	240
CREATION RANGE	242
DISCRETION RANGE	244
HARMONY RANGE	246
HORIZON RANGE	248
INTIMACY RANGE	250
MELODY RANGE	252
COLOUR CHART	254



## PRODUCTS YOU CAN RELY ON



### LA TOULOUSAINE, 60 YEARS OF TRUST AND RELIABILITY

Over the past six decades La Toulousaine has gained considerable expertise in designing quality closure solutions you can rely on.

The La Toulousaine technical centre and industrial premises are based in Toulouse, France, a city at the forefront of European engineering.

More than three hundred skilled technicians, designers and operators work together to provide our customers with the best products and solutions. With more than a million solutions keeping homes and businesses secure throughout Europe, La Toulousaine is a top-of-the-range standard in the industry.

## ALUMINIUM A HIGH QUALITY MATERIAL



LIGHT



SHOCK  
RESISTANT



100% ENVIRONMENT  
FRIENDLY



CORROSION RESISTANT



FOR YOUR OWN SAFETY AND THAT OF  
YOUR CHILDREN, ALL OUR GATES COMPLY  
WITH EN 13241 + A1 STANDARDS.



With their low maintenance, weather resistance and high-end aesthetic appeal, Aluminium Gates are fast becoming a popular choice for homeowners and commercial customers alike, with many benefits over traditional gates.

From sleek and ultra modern, to traditional elegance, the wide range of models means there is a design to suit everyone's tastes.

Rolling Center is the exclusive supplier of La Toulousaine, Europe's no.1 aluminium gate producer with a reputation for quality design and craftsmanship.



## PATENTED EXPERTISE

### MECA'CLAV® ASSEMBLY SYSTEM

Over the past six decades La Toulousaine has gained considerable expertise in designing quality closure solutions you can rely on.

### DURABILITY

Our innovative and patented assembly system provides lasting quality.

### ROBUSTNESS

Based on multi-chamber profiles, our Méca'Clav® system gives our gates both exceptional resistance and the most elegant lines on the market.



### USEFUL INFORMATION:

Maximum sizes:

- 1 Leaf Swing Gates = 3m x 2m
- 2 Leaf Swing Gates = 5m x 2m
- Sliding Gates = 5.3m x 2m
- Cantilever = 4.5m x 2m
- Double slider = 7m
- Access Budget range = 4m x 1.6m

### RESTRICTIONS:

- Cantilever gates are only available for the flat top designs
- Faux wood effect is not available for sliding bow top gates
- Bi-parting double sliding gates are not available as bow tops

## WHY CHOOSE ROLLING CENTER ALUMINIUM GATES?

- Precision engineered to the highest standard: manufactured using patented Meca'clav® technology ensuring strength and rigidity of the frame
- Custom-designed gates tailored to your requirements
- Lightweight, strong, durable and low maintenance
- Weather and rot-resistant
- Wide choices: over 500 models in over 100 powder-coated colour options, and textured faux wood effect for Sliding gates, Swing gates, Cantilever gates, Fence panels, Large and Small posts
- Compatible with all gate automation and access control systems
- An impressive 25 year warranty: for ultimate peace of mind
- Network of carefully-selected and experienced aluminium gate installation partners across the UK
- Free pre and post sale technical support from our aluminium gate experts




LA TOULOUSAIN

# ACCORD

## LA TOULOUSAIN ACCORD JERSEY ALUMINIUM GATE

GATE AVAILABLE AS:

JERSEY					
• SLIDING GATE	• SWING GATE	• CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS

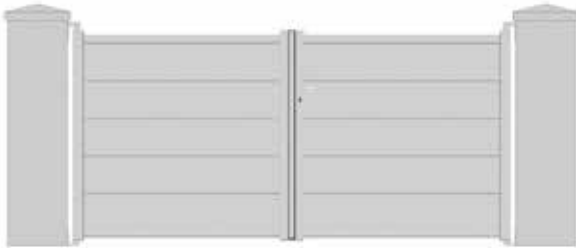

### ACCORD JERSEY

SLIDING / SWING / CANTILEVER / BI-PARTING

With 250mm horizontal panels - can be done as 6m slider RAL 7016 only

PEDESTRIAN

With 250mm horizontal panels

## LA TOULOUSAIN ACCORD AURIGNY ALUMINIUM GATE

GATE AVAILABLE AS:

AURIGNY					
• SLIDING GATE	• SWING GATE	• CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS



### ACCORD AURIGNY

SLIDING / SWING / CANTILEVER / BI-PARTING

With 150mm horizontal panels

PEDESTRIAN

With 150mm horizontal panels



25  
YEARS  
WARRANTY

**The Accord Range.** Clean lines, straight angles and a sleek, modern design are what makes the **Accord** range so appealing. Featuring wide, solid slats with grooves every **150mm** or **250mm**, the **Accord** range offers a high level of privacy and security. Fully customisable, you can choose from 16 designs in a variety of colours and finishes to create the gate that's ideal for you.

- Made to measure
- Horizontal panels
- Ideal for those looking for extra privacy and security for their home
- Solid infill with 2 or 3 portholes dependent on dimensions
- Grooves every 250mm or 150mm, Jersey design only
- Jersey, Guernsey and Chausey designs are available as a 6m slider (only RAL 7016)
- Available as Sliding Gates, Swing Gates or Pedestrian Gates
- A choice of 18 standard RAL colours which are highly resilient to wear, scratches and knocks
- Special finishes optional
- 25 year warranty
- Many more designs available

#### GATE FINISHES - STANDARD COLOURS

WHITE 9016	IVORY 1015	GREEN 6005	BLACK 9005	GREY 7034
WHITE 9010	GREY 7035	RED 3004	BROWN 8011	GREEN 6021
	GREY 7031	BLUE 5003	BROWN 8003	BROWN 8014
	BLUE 5023	GREY 7016	BROWN 8019	GREY 7006



#### LA TOULOUSAIN ACCORD GUERNSEY ALUMINIUM GATE

GATE AVAILABLE AS:

GUERNSEY					
• SLIDING GATE	• SWING GATE	• CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS

#### ACCORD GUERNSEY ALUMINIUM GATE

SLIDING / SWING / CANTILEVER / BI-PARTING

With 250mm horizontal panels - can be done as 6m slider RAL 7016 only

PEDESTRIAN

With 250mm horizontal panels



#### LA TOULOUSAIN ACCORD CHAUSEY ALUMINIUM GATE

GATE AVAILABLE AS:

CHAUSEY					
• SLIDING GATE	• SWING GATE	• CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS

#### ACCORD CHAUSEY ALUMINIUM GATE

SLIDING / SWING / CANTILEVER / BI-PARTING

With 250mm horizontal panels - can be done as 6m slider RAL 7016 only

PEDESTRIAN

With 250mm horizontal panels -






LA TOULOUSAIN

# ARPEGGIO

## LA TOULOUSAIN ARPEGGIO VAILLY ALUMINIUM GATE

GATE AVAILABLE AS:

VAILLY					
• SLIDING GATE	• SWING GATE	• CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS

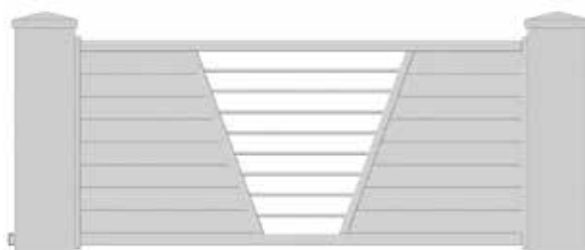

### ARPEGGIO VAILLY

SLIDING / SWING / CANTILEVER / BI-PARTING

With 75mm or 150mm horizontal solid slats & 25mm openwork tubes

PEDESTRIAN

With 75mm or 150mm horizontal solid slats & 25mm openwork tubes

## LA TOULOUSAIN ARPEGGIO VENDOME ALUMINIUM GATE

GATE AVAILABLE AS:

VENDOME					
• SLIDING GATE	• SWING GATE	• CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS



### ARPEGGIO VENDOME

SLIDING / SWING / CANTILEVER / BI-PARTING

With 75mm or 150mm horizontal solid slats & 70mm openwork slats

PEDESTRIAN

With 75mm or 150mm horizontal solid slats & 70mm openwork slats



25 YEARS WARRANTY


**The Arpeggio range.** For the discerning customer who enjoys a touch of luxury and timeless elegance, this classic model combines straight lines with traditional curves with both solid and spaced slats on each leaf. With over 40 designs available, each gate in this line consists of a solid part and a part to customise to elegantly adorn your outdoor space.

As well as the slatted designs, options for panel design models include laser cutting or engraving, stamped oblong or round sheets, geometric engraved patterns, personalisation such as your house number and two-tone colours.

- Made to measure
- Extremely light in comparison to a standard wood gate with exceptional robustness and reliability
- 25 year warranty
- A choice of 18 standard RAL colours which are highly resilient to wear, scratches and knocks
- Available as Sliding Gates, Swing Gates or Pedestrian Gates
- Many more designs available

#### GATE FINISHES - STANDARD COLOURS

WHITE 9016	IVORY 1015	GREEN 6005	BLACK 9005	GREY 7034
WHITE 9010	GREY 7035	RED 3004	BROWN 8011	GREEN 6021
	GREY 7031	BLUE 5003	BROWN 8003	BROWN 8014
	BLUE 5023	GREY 7016	BROWN 8019	GREY 7006

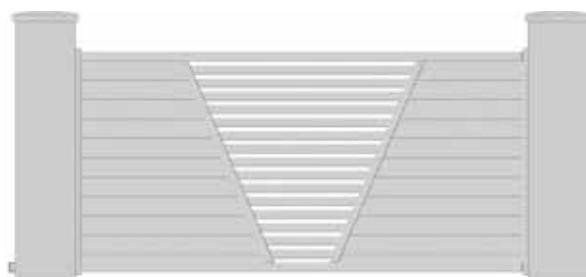

#### LA TOULOUSAIN ARPEGGIO VERACRUZ ALUMINIUM GATE


GATE AVAILABLE AS:

VERACRUZ					
• SLIDING GATE	• SWING GATE	• CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS

#### ARPEGGIO VERACRUZ

SLIDING / SWING / CANTILEVER / BI-PARTING  
PEDESTRIAN

With 75mm or 150mm horizontal solid slats & 70mm openwork slats  
With 75mm or 150mm horizontal solid slats & 70mm openwork slats

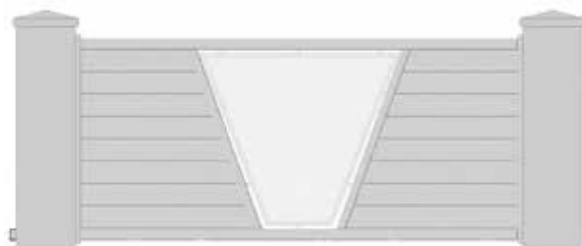

#### LA TOULOUSAIN ARPEGGIO VIGO ALUMINIUM GATE

GATE AVAILABLE AS:

VIGO					
• SLIDING GATE	• SWING GATE	• CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS

#### ARPEGGIO VIGO

SLIDING / SWING / CANTILEVER / BI-PARTING  
PEDESTRIAN

With 75mm or 150mm horizontal solid slats & micro perforated sheet  
With 75mm or 150mm horizontal solid slats & micro perforated sheet




# LA TOULOUSAIN CREATION

## LA TOULOUSAIN CREATION ANNECY ALUMINIUM GATE

GATE AVAILABLE AS:

ANNECY					
• SLIDING GATE	• SWING GATE	CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS

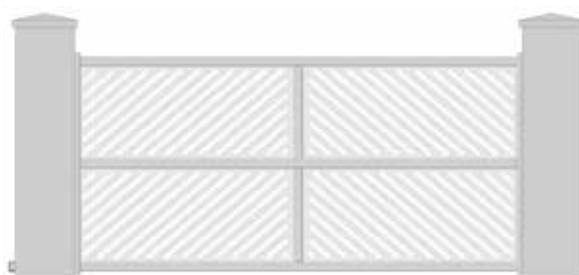

### CREATION ANNECY

SLIDING / SWING / BI-PARTING

Openwork patterned design

PEDESTRIAN / FENCE PANELS

Openwork patterned design

## LA TOULOUSAIN CREATION EVRY ALUMINIUM GATE

GATE AVAILABLE AS:

EVRY					
• SLIDING GATE	• SWING GATE	CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS



### CREATION EVRY

SLIDING / SWING / BI-PARTING

Full sheet design

PEDESTRIAN / FENCE PANELS

Full sheet design





**The Creation Range.** Openwork filling, solid or personalised, this aerated line has a contemporary design that gives bold character to your outdoor space. If personalisation is your thing, putting the creativity into your gate designs is simple with the Creation Range, which has perforated or solid sheets that can be personalised, embossed or engraved with a variety of patterns, horizontal or vertical openings.

- Made to measure
- Max. size 5m sliding gate
- Openwork filling
- Solid or personalised infill
- Modern design
- Patterns vary depending on the size of the gate
- Optional Personalisation: you can provide us with a high definition photo or logo, subject to feasibility
- A choice of 18 standard RAL colours which are highly resilient to wear, scratches and knocks
- 25 year warranty
- Many more designs available

#### GATE FINISHES - STANDARD COLOURS

WHITE 9016	IVORY 1015	GREEN 6005	BLACK 9005	GREY 7034
WHITE 9010	GREY 7035	RED 3004	BROWN 8011	GREEN 6021
	GREY 7031	BLUE 5003	BROWN 8003	BROWN 8014
	BLUE 5023	GREY 7016	BROWN 8019	GREY 7006



#### CREATION SETE


SLIDING / SWING / BI-PARTING  
PEDESTRIAN / FENCE PANELS

Openwork patterned design  
Openwork patterned design

#### LA TOULOUSAIN CREATION SETE ALUMINIUM GATE

GATE AVAILABLE AS:

SETE					
SLIDING GATE	SWING GATE	CANTILEVER GATE	BI-PARTING GATE	PEDESTRIAN GATE	FENCE PANELS
•	•		•	•	•

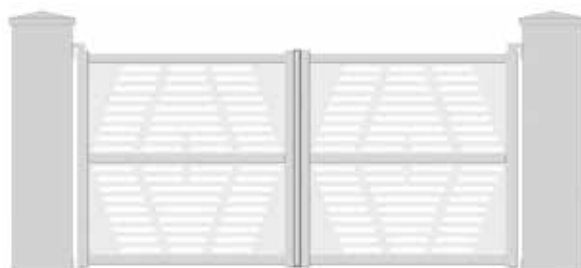

#### CREATION TULLE

SLIDING / SWING / BI-PARTING  
PEDESTRIAN / FENCE PANELS

Openwork patterned design  
Openwork patterned design

#### LA TOULOUSAIN CREATION TULLE ALUMINIUM GATE

GATE AVAILABLE AS:

TULLE					
SLIDING GATE	SWING GATE	CANTILEVER GATE	BI-PARTING GATE	PEDESTRIAN GATE	FENCE PANELS
•	•		•	•	•




LA TOULOUSAIN  
**DISCRETION**

LA TOULOUSAIN  
**DISCRETION FLORIANA**  
ALUMINIUM GATE

GATE AVAILABLE AS:

FLORIANA					
• SLIDING GATE	• SWING GATE	• CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS

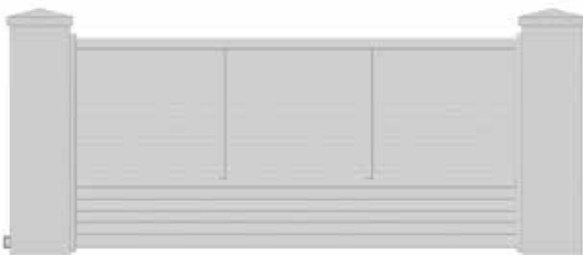

**DISCRETION FLORIANA - Louvered horizontal design**


SLIDING / SWING / CANTILEVER / BI-PARTING  
PEDESTRIAN / FENCE PANELS

75 / 150mm horizontal slats or 75mm vertical slats for solid base  
75 / 150mm horizontal slats or 75mm vertical slats for solid base

LA TOULOUSAIN  
**DISCRETION MOSTA**  
ALUMINIUM GATE

GATE AVAILABLE AS:

MOSTA					
• SLIDING GATE	• SWING GATE	• CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS

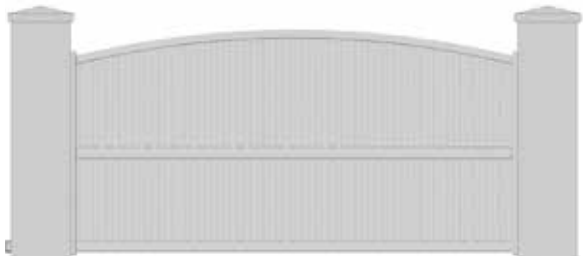

**DISCRETION MOSTA - Louvered vertical design**

SLIDING / SWING  
PEDESTRIAN

75 / 150mm horizontal slats or 75mm vertical slats for solid base  
75 / 150mm horizontal slats or 75mm vertical slats for solid base





**The Discretion Range.** Providing the perfect balance of serenity and security, for ultimate style and peace of mind. Choose from models with solid plates, the slats provide a windbreak and privacy screen so that you can relax and enjoy your outdoor space in style and comfort. patterns, horizontal or vertical openings.

- Made to measure
- Louvered design
- Maximum height is 1400mm without solid base
- Maximum 2000mm height with a solid base
- A choice of 18 standard RAL colours which are highly resilient to wear, scratches and knocks
- 25 year warranty
- Many more designs available

#### GATE FINISHES - STANDARD COLOURS

WHITE 9016	IVORY 1015	GREEN 6005	BLACK 9005	GREY 7034
WHITE 9010	GREY 7035	RED 3004	BROWN 8011	GREEN 6021
	GREY 7031	BLUE 5003	BROWN 8003	BROWN 8014
	BLUE 5023	GREY 7016	BROWN 8019	GREY 7006



#### DISCRETION RABAT - Louvered vertical design

SLIDING / SWING

75 / 150mm horizontal slats or 75mm vertical slats for solid base


PEDESTRIAN

75 / 150mm horizontal slats or 75mm vertical slats for solid base

#### LA TOULOUSAIN DISCRETION RABAT ALUMINIUM GATE

GATE AVAILABLE AS:

RABAT					
SLIDING GATE	SWING GATE	CANTILEVER GATE	BI-PARTING GATE	PEDESTRIAN GATE	FENCE PANELS
•	•			•	

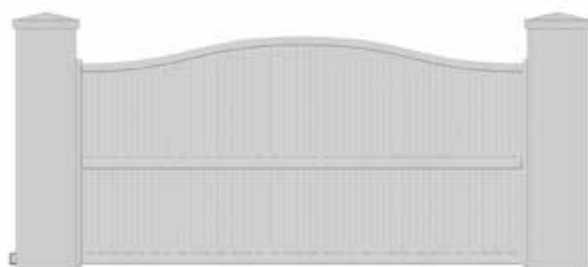

#### DISCRETION VICTORIA - Louvered vertical design

SLIDING / SWING

75mm / 150mm horizontal solid slats

PEDESTRIAN

75mm vertical slats for solid base

#### LA TOULOUSAIN DISCRETION VICTORIA ALUMINIUM GATE

GATE AVAILABLE AS:

VICTORIA					
SLIDING GATE	SWING GATE	CANTILEVER GATE	BI-PARTING GATE	PEDESTRIAN GATE	FENCE PANELS
•	•			•	



LA TOULOUSAIN

# HARMONY

## LA TOULOUSAIN HARMONY BERGEN ALUMINIUM GATE

GATE AVAILABLE AS:

BERGEN					
• SLIDING GATE	• SWING GATE	CANTILEVER GATE	BI-PARTING GATE	• PEDESTRAIN GATE	FENCE PANELS



### HARMONY BERGEN

SLIDING / SWING

75 / 150mm horizontal, vertical or diagonal slats for solid base, openwork slats 70 / 100mm


PEDESTRIAN

75 / 150mm horizontal, vertical or diagonal slats for solid base, openwork slats 70 / 100mm

## LA TOULOUSAIN HARMONY HAWAII ALUMINIUM GATE

GATE AVAILABLE AS:

HAWAII					
• SLIDING GATE	• SWING GATE	• CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS

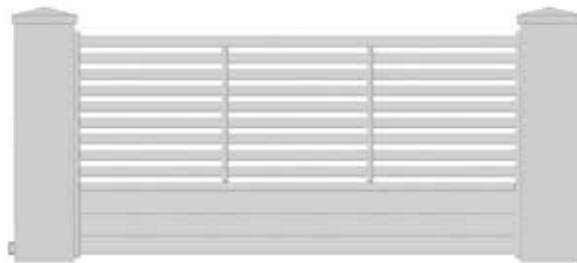

### HARMONY HAWAII

SLIDING / SWING / CANTILEVER / BI-PARTING

75 / 150mm horizontal or vertical slats for solid base, openwork slats 70 / 100mm

PEDESTRIAN / FENCE PANELS

75 / 150mm horizontal or vertical slats for solid base, openwork slats 70 / 100mm



**The Harmony Range.** A truly timeless design, with its micro-perforated top and solid base, the **Harmony** range strikes a balance between providing you with a feeling of privacy, whilst offering visibility to the outside for a feeling of openness. Customisable, the solid base can be designed with vertical, horizontal or diagonal slats.

- Made to measure
- A choice of 18 standard RAL colours which are highly resilient to wear, scratches and knocks
- Capitole and Oslo can be a 6m sliding gate (75mm slats only)
- The height of the intermediate transom can be changed / customised
- 25 year warranty
- Many more designs available

#### GATE FINISHES - STANDARD COLOURS

WHITE 9016	IVORY 1015	GREEN 6005	BLACK 9005	GREY 7034
WHITE 9010	GREY 7035	RED 3004	BROWN 8011	GREEN 6021
	GREY 7031	BLUE 5003	BROWN 8003	BROWN 8014
	BLUE 5023	GREY 7016	BROWN 8019	GREY 7006



#### HARMONY HELSINKI

SLIDING / SWING

75 / 150mm horizontal, vertical or diagonal slats for solid base, openwork slats 70 / 100mm

PEDESTRIAN

75 / 150mm horizontal, vertical or diagonal slats for solid base, openwork slats 70 / 100mm

#### LA TOULOUSAINE HARMONY HELSINKI ALUMINIUM GATE

GATE AVAILABLE AS:

HELSINKI					
SLIDING GATE	SWING GATE	CANTILEVER GATE	BI-PARTING GATE	PEDESTRIAN GATE	FENCE PANELS
•	•			•	



#### HARMONY RIBE

SLIDING / SWING

75 / 150mm horizontal, vertical or diagonal slats for solid base, openwork slats 70 / 100mm

PEDESTRIAN

75 / 150mm horizontal, vertical or diagonal slats for solid base, openwork slats 70 / 100mm

#### LA TOULOUSAINE HARMONY RIBE ALUMINIUM GATE

GATE AVAILABLE AS:

RIBE					
SLIDING GATE	SWING GATE	CANTILEVER GATE	BI-PARTING GATE	PEDESTRIAN GATE	FENCE PANELS
•	•			•	





LA TOULOUSAIN  
**HORIZON**

LA TOULOUSAIN  
**HORIZON IGIS**  
ALUMINIUM GATE

GATE AVAILABLE AS:

IGIS					
• SLIDING GATE	• SWING GATE	CANTILEVER GATE	BI-PARTING GATE	• PEDESTRAIN GATE	FENCE PANELS



**HORIZON IGIS**

SLIDING / SWING

25mm openwork tubes - different rail tip options available

PEDESTRIAN

25mm openwork tubes - different rail tip options available

LA TOULOUSAIN  
**HORIZON KREMS**  
ALUMINIUM GATE

GATE AVAILABLE AS:

KREMS					
SLIDING GATE	• SWING GATE	CANTILEVER GATE	BI-PARTING GATE	• PEDESTRAIN GATE	FENCE PANELS



**HORIZON KREMS**

SWING

25mm openwork tubes - different rail tip options available

PEDESTRIAN

25mm openwork tubes - different rail tip options available



**The Horizon Range.** Fusing the contemporary with classic elegance, the Horizon range includes a series of models with a completely open gate design, featuring horizontal or vertical slats of tubes. If you're looking to boost your home's security and privacy, but not block your view of the outside, the Horizon is the perfect choice.

- Horizontal or vertical slats
- Optional spearheads
- Openwork slats covering
- Straight, bowed, roll or slant top gate
- Vertical crossbeam is obligatory from 1400mm per leaf
- A choice of 18 standard RAL colours which are highly resilient to wear, scratches and knocks
- 25 year warranty
- Many more designs available

#### GATE FINISHES - STANDARD COLOURS

WHITE 9016	IVORY 1015	GREEN 6005	BLACK 9005	GREY 7034
WHITE 9010	GREY 7035	RED 3004	BROWN 8011	GREEN 6021
	GREY 7031	BLUE 5003	BROWN 8003	BROWN 8014
	BLUE 5023	GREY 7016	BROWN 8019	GREY 7006



#### HORIZON LISBON

SLIDING / SWING

Openwork vertical slats 70mm or 100mm

PEDESTRIAN

Openwork vertical slats 70mm or 100mm

#### LA TOULOUSAINE HORIZON LISBON ALUMINIUM GATE

GATE AVAILABLE AS:

LISBON					
SLIDING GATE	SWING GATE	CANTILEVER GATE	BI-PARTING GATE	PEDESTRIAN GATE	FENCE PANELS
•	•			•	



#### HORIZON MIAMI

SLIDING / SWING / CANTILEVER / BI-PARTING

Openwork horizontal slats 70mm or 100mm

PEDESTRIAN / FENCE PANELS

Openwork horizontal slats 70mm or 100mm

#### LA TOULOUSAINE HORIZON MIAMI ALUMINIUM GATE

GATE AVAILABLE AS:

MIAMI					
SLIDING GATE	SWING GATE	CANTILEVER GATE	BI-PARTING GATE	PEDESTRIAN GATE	FENCE PANELS
•	•	•	•	•	•





LA TOULOUSAIN

# INTIMACY

## LA TOULOUSAIN INTIMACY BELFAST ALUMINIUM GATE

GATE AVAILABLE AS:

BELFAST					
• SLIDING GATE	• SWING GATE	CANTILEVER GATE	BI-PARTING GATE	• PEDESTRAIN GATE	FENCE PANELS



### INTIMACY BELFAST

SLIDING / SWING / CANTILEVER / BI-PARTING

75mm or 150mm vertical fully boarded slats

PEDESTRIAN / FENCE PANELS

75mm or 150mm vertical fully boarded slats

## LA TOULOUSAIN INTIMACY DUNDEE ALUMINIUM GATE

GATE AVAILABLE AS:

DUNDEE					
• SLIDING GATE	• SWING GATE	CANTILEVER GATE	BI-PARTING GATE	• PEDESTRAIN GATE	FENCE PANELS



### INTIMACY DUNDEE

SLIDING / SWING

75mm or 150mm vertical fully boarded slats

PEDESTRIAN

75mm or 150mm vertical fully boarded slats




**The Intimacy Range.** Blending modern styling with intimate design, the Intimacy range provides complete privacy for your home and outdoor spaces. With a fully clad design, security and privacy is offered without compromising on curb appeal.

- Made to measure
- Glasgow model can be a 6m slider (75mm slats only)
- Horizontal, vertical or diagonal slats - 70 or 150mm
- Straight, bowed, roll or slant top gate
- Horizontal cross beam optional
- Two leaf imitation available for sliding gates
- A choice of 18 standard RAL colours which are highly resilient to wear, scratches and knocks
- 25 year warranty
- Many more designs available

#### GATE FINISHES - STANDARD COLOURS

WHITE 9016	IVORY 1015	GREEN 6005	BLACK 9005	GREY 7034
WHITE 9010	GREY 7035	RED 3004	BROWN 8011	GREEN 6021
	GREY 7031	BLUE 5003	BROWN 8003	BROWN 8014
	BLUE 5023	GREY 7016	BROWN 8019	GREY 7006

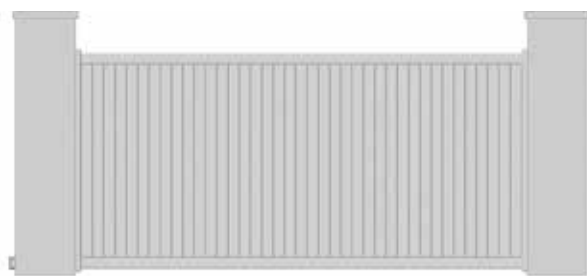

#### LA TOULOUSAIN INTIMACY GLASGOW ALUMINIUM GATE

GATE AVAILABLE AS:

GLASGOW					
• SLIDING GATE	• SWING GATE	• CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS

#### INTIMACY GLASGOW

SLIDING / SWING

70mm or 150mm Fully boarded vertical slats - available as 6m slider 75mm slats

PEDESTRIAN

70mm or 150mm Fully boarded vertical slats



#### LA TOULOUSAIN INTIMACY SYRACUSE ALUMINIUM GATE

GATE AVAILABLE AS:

SYRACUSE					
• SLIDING GATE	• SWING GATE	• CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	• FENCE PANELS

#### INTIMACY SYRACUSE

SLIDING / SWING / CANTILEVER / BI-PARTING

75mm or 150mm fully boarded diamond slats

PEDESTRIAN / FENCE PANELS

75mm or 150mm fully boarded diamond slats



# LA TOULOUSAIN MELODY

## LA TOULOUSAIN MELODY TENUTO ALUMINIUM GATE

GATE AVAILABLE AS:

TENUTO					
• SLIDING GATE	• SWING GATE	CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	FENCE PANELS



### MELODY TENUTO - Full sheet design with customisable centre panel

SLIDING / SWING / BI-PARTING

Choice of micro perforated, walnut or pine wood décors, engraving, laser cutting

PEDESTRIAN

Choice of micro perforated, walnut or pine wood décors, engraving, laser cutting

## LA TOULOUSAIN MELODY LARGO ALUMINIUM GATE

GATE AVAILABLE AS:

LARGO					
• SLIDING GATE	• SWING GATE	CANTILEVER GATE	• BI-PARTING GATE	• PEDESTRAIN GATE	FENCE PANELS



### MELODY LARGO - Full sheet stamped design with customisable centre panel

SLIDING / SWING / BI-PARTING

Choice of micro perforated, walnut or pine wood décors, engraving, laser cutting

PEDESTRIAN

Choice of micro perforated, walnut or pine wood décors, engraving, laser cutting





**The Melody Range.** If you're looking for a fusion of creative expression and classic luxury, the straight-framed **Melody** range plays with different textures/materials, filled sections and patterns for a bold and creative, yet elegant and sophisticated aesthetic.

With lots of options for infill's and patterns, there are options to insert walnut or aged pine laminated wood, two tone colours, laser cut designs, engraving, aluminium décor, perforation and embossing.

- Made to measure
- Straight frame only design
- Double horizontal cross-pieces
- Built in 3 sections allowing you to choose your infill's for each panel
- Providing additional privacy and security for families in their home
- A choice of 18 standard RAL colours which are highly resilient to wear, scratches and knocks
- 25 year warranty
- Many more designs available

#### GATE FINISHES - STANDARD COLOURS

WHITE 9016	IVORY 1015	GREEN 6005	BLACK 9005	GREY 7034
WHITE 9010	GREY 7035	RED 3004	BROWN 8011	GREEN 6021
	GREY 7031	BLUE 5003	BROWN 8003	BROWN 8014
	BLUE 5023	GREY 7016	BROWN 8019	GREY 7006

We're the exclusive distributor of La Toulousaine, Europe's no.1 manufacturer of high quality aluminium gates, with a wide selection of styles, designs, colours and finishes plus an impressive 25 year warranty on all our aluminium gates! We welcome applications from new trade installers wanting to join our partner network as an approved Rolling Center Aluminium Gates installer.

Visit [rollingcenter.co.uk/aluminium-gates-uk#enquiry-form](http://rollingcenter.co.uk/aluminium-gates-uk#enquiry-form) to sign up.

JOIN OUR  
ALUMINIUM  
GATES  
TRADE PARTNER  
PROGRAMME





## LA TOULOUSAIN ALUMINIUM GATE COLOUR FINISHES

### GATE FINISHES - STANDARD COLOURS

	WHITE 9016		GREY 7031		GREEN 6005		BLACK 9005		GREY 7034
	WHITE 9010		BLUE 5023		RED 3004		BROWN 8011		GREEN 6021
	IVORY 1015		BLUE 5003		BROWN 8003		BROWN 8014		
	GREY 7035		GREY 7016		BROWN 8019		GREY 7006		

### GATE FINISHES - EXTRA STANDARD COLOUR OPTIONS

	IVORY 1013		GREY 7037		GREY 7021		BLUE 5014		GREEN 6003
	GREY 9006		GREY 7022		BEIGE 1019		RED 3005		GREEN 6009

### GATE FINISHES - SPECIAL COLOUR OPTIONS

	YAZD 2525		MARS 2525		RED 2022		GREY 2900		BLUE 2700
	AMBER 2525		ORDOS 2525		GREY 2400		BLUE 2600		GREEN 2300
	GREY 2150		GREEN 2100		BLACK 2100		BLACK 2200		

### GATE FINISHES - RAL MATT COLOUR OPTIONS

	RAL 1013		RAL 1015		RAL 3004		RAL 3005		RAL 5003
	RAL 5010		RAL 6005		RAL 6009		RAL 7015		RAL 7016
	RAL 7035		RAL 7037		RAL 8014		RAL 8017		RAL 8019
	RAL 9010		RAL 9016						

### GATE FINISHES - RAL GLOSSY COLOUR OPTIONS

	RAL 1021		RAL 1023		RAL 1034		RAL 2002		RAL 3000
	RAL 3014		RAL 5005		RAL 5008		RAL 5009		RAL 5010
	RAL 5013		RAL 5015		RAL 5017		RAL 6002		RAL 6015
	RAL 6029		RAL 7001		RAL 7004		RAL 7006		RAL 7008
	RAL 7011		RAL 7012		RAL 7015		RAL 7016		RAL 7021
	RAL 7031		RAL 7035		RAL 7036		RAL 7037		RAL 7038
	RAL 7040		RAL 7042		RAL 7043		RAL 7044		RAL 8001
	RAL 8014		RAL 8017		RAL 8019		RAL 9002		RAL 9003
	RAL 9005		RAL 9010		RAL 9016				

**WE STOCK A  
VAST RANGE OF  
GEAR RACK AND  
MANY OTHER  
GATE HARDWARE  
PRODUCTS**

Visit  
[www.rollingcenter.co.uk](http://www.rollingcenter.co.uk)  
or call 0113 201 6677 for  
more information.



Handwriting practice area consisting of 30 horizontal dashed lines.

# '22

2022 TRADE CATALOGUE

GATE HARDWARE  
GATE AUTOMATION  
ACCESS CONTROL  
GATE SAFETY  
ALUMINIUM GATES

**TEL.** 0113 201 6677

SECTION J

# COMPOSITE FENCE BOARDS

SANDED & COMPOSITE FENCE BOARDS 258




## COMPOSITE FENCE BOARDS

Composite wood fencing and gate boards are a low maintenance, long lasting and environmentally friendly, alternative to real wood, made from recycled material. The Rolling Center composite gate and fencing panels are designed specifically for domestic gates and fences as they are light which helps make installing them easier, but they are also durable, robust and strong.

There is no need to paint, varnish, stain or seal the boards. They are rot, mould and UV resistant as well as being colourfast and all weatherproof so the colour won't fade over time. The finish is contemporary and long lasting with minimum maintenance needed.

The composite boards are simple to slot together using the tongue and groove system and can be easily cut to your specific size with a saw.

They are easy to keep clean, either by wiping down periodically with a damp cloth or by using approved composite board cleaner and a soft bristle brush. We have a range of colours and finishes to choose from.

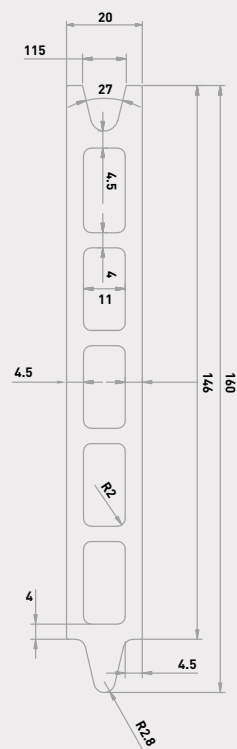





**ROLLING CENTER  
CFB BLACK**  
SANDED & WOODGRAIN  
EFFECT COMPOSITE FENCE  
BOARDS

CFB-S-BLACK

Black - sanded effect - 2000 x 146 x 19mm

CFB-W-BLACK

Black - wood grain effect - 2000 x 146 x 19mm



**ROLLING CENTER  
CFB GREY**  
SANDED & WOODGRAIN  
EFFECT COMPOSITE FENCE  
BOARDS

CFB-S-GREY

Grey - sanded effect - 2000 x 146 x 19mm

CFB-W-GREY

Grey - wood grain effect - 2000 x 146 x 19mm



**ROLLING CENTER  
CFB BROWN**  
SANDED & WOODGRAIN  
EFFECT COMPOSITE FENCE  
BOARDS

CFB-S-BROWN

Brown - sanded effect - 2000 x 146 x 19mm

CFB-W-BROWN

Brown - wood grain effect - 2000 x 146 x 19mm



**ROLLING CENTER  
CFB DARK OAK &  
LIGHT BROWN**  
WOODGRAIN EFFECT  
COMPOSITE FENCE BOARDS

CFB-W-LIGHT BROWN

Light brown - wood grain effect - 2000 x 146 x 19mm

CFB-W-GOLDEN OAK

Golden oak - wood grain effect - 2000 x 146 x 19mm

# '22

2022 TRADE CATALOGUE

GATE HARDWARE  
GATE AUTOMATION  
ACCESS CONTROL  
GATE SAFETY  
ALUMINIUM GATES

**TEL.** 0113 201 6677



# SECTION K COMPLETE AUTOMATION SYSTEMS

AUTOMATIC BARRIER SYSTEMS	262
AUTOMATIC SLIDING GATE SYSTEMS	264
FULL HEIGHT TURNSTILE SYSTEMS	267
ACCESS READER POSTS	269



ROLLING CENTER  
D3250  
AUTOMATIC BARRIER  
SYSTEM

Developed from our industry **D3200** barrier, the **D3250** features proven reliability with an eye catching fresh new design.

The barrier is finished in a polyester powder coated two tone scheme with a choice of RAL colours at no extra cost. For prestigious sites, brushed stainless steel covers are available.


Also available is a back-lit LED panel that can feature your company Logo or model designation. The colour changing LED Lights that can be programmed to act as traffic lights or just simply mood Lighting.

The barrier features 2 lockable, fully removable covers to provide complete access to the mechanism and control panel which simplifies maintenance when compared to conventional barriers.

Operation is by an inverter three phase driven motor which provides 100% continuous cycle rating. Control is by a Schneider PLC which enables programming of the operation parameters and compatibility with most access control systems.

Boom lengths of up to 7m are available, with opening times between 1.5 and 6 seconds depending on length.

The D3250 automatic barrier: The highest quality barrier produced in the UK with its sleek new looks and competitive prices.

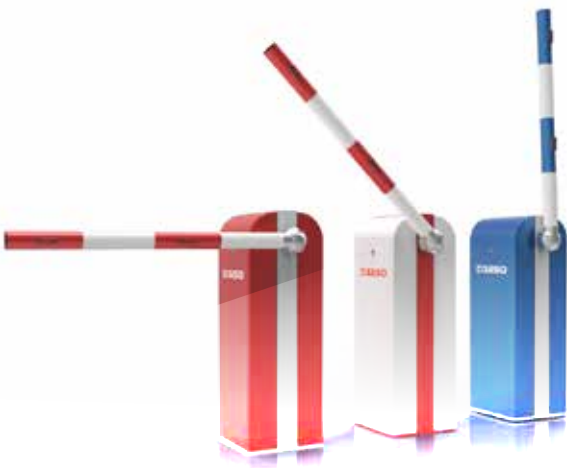

AUTOMATIC BARRIER SYSTEM

D3250

230vac automatic barrier up to 7m boom only - without skirt

TECHNICAL INFO:

D3250 AUTOMATIC BARRIER	
ELECTRICAL DATA	
POWER SUPPLY	230VAC 50HZ 6A
DRIVE UNIT	3 PHASE MOTOR WORMED GEARBOX (INVERTER DRIVEN)
SPECIFICATION	
OPENING/CLOSING TIME	6-12.1 SECONDS
CYCLES	100% CONTINUOUS DUTY RATING
FINISH	EPOXY PRIMED & POLYESTER POWDER COATED
DIMENSIONS	
MAX BOOM LENGTH (MM)	7000 PLAIN POLE
BASE PLATE (MM)	6000 C/W BOTTOM SKIRT
POLE HEIGHT (MM)	4500 C/W HI-BAR SKIRT
BOOM DIAMETER (MM)	76
UNIT DIMENSIONS (MM)	405 X 420 X 1140

IMAGES:



**NEED PRE OR POST  
SALES TECHNICAL  
SUPPORT?  
OUR FRIENDLY  
TEAM ARE HERE TO  
HELP**

Call us on  
**0113 201 6677** or email  
**Info@rollingcenter.co.uk**



## AUTOMATIC BARRIER SYSTEM

**D3800HD**

230vac heavy duty automatic barrier up to 9m



### ROLLING CENTER D3800HD AUTOMATIC BARRIER SYSTEM

Our newly designed **D3850** heavy duty barrier extends the capability of its smaller brother the **D3250**. With a fresh new look designed to reflect the contemporary appearance of the standard barrier, the D3580 can protect road widths of up to 9m.

The redesign utilizes an enhanced motor and gearbox assembly which has eliminated the need for counter-weights. Obviously this also removes the trapping hazards associated with traditional counter weighted barriers, and reduces the space required for installation.

As with all our barriers, a complete safety system can be configured, with safety edges to the bottom of plain booms, photocell protection and induction loop vehicle detection.

Lower skirts, or hi-bar skirts can be fitted and we offer a complete customization service with colour combinations and logos available to match your corporate look.

### TECHNICAL INFO:

D3850 HEAVY DUTY AUTOMATIC BARRIER	
ELECTRICAL DATA	
POWER SUPPLY	230VAC 50HZ 5A
DRIVE UNIT	3 PHASE MOTOR WORMED GEARBOX (INVERTER DRIVEN)
SPECIFICATION	
OPENING/CLOSING TIME	4-9 SECONDS
CYCLES	100% CONTINUOUS DUTY RATING
FINISH	POLYESTER POWDER COATED IN RED AND WHITE AS STANDARD
DIMENSIONS	
MAX BOOM LENGTH	9.0M WITH A PLAIN BOOM
BASE PLATE	8.0M WITH A BOTTOM SKIRT
POLE HEIGHT	6.5M WITH A HI-BAR UPPER AND LOWER SKIRT
BOOM DIAMETER (MM)	100
UNIT DIMENSIONS (MM)	770 X 520 X 1230

### IMAGES:





**ROLLING CENTER  
D5600  
AUTOMATIC BARRIER  
SYSTEM**

Our **D5600** range of cantilever sliding gates are designed to provide robust and reliable security at bay vehicle entrances. They are manufactured from high strength steel, which provides a more robust product than aluminium and ensures a much longer service life. These gates are custom manufactured to the client's individual requirements and are available in any size up to 6m clear width by 3.5m height.

Both manually operated and automatic versions are available. They have an attractive appearance, which may be enhanced with a choice of infill options ranging from vertical bar, palisade, weld-mesh or timber. Automatic gates are powered by a three phase, inverter driven motor / gearbox, and safety systems which fully comply with all current and evolving safety legislation and best practice.



**AUTOMATIC SLIDING GATE SYSTEM**

D5600


Cantilever sliding gate up to 6m clear opening

**TECHNICAL INFO:**

	D5600 AUTOMATIC SLIDING GATE
ELECTRICAL DATA	D5600
POWER SUPPLY	230VAC 50HZ 56A
DRIVE UNIT	3 PHASE MOTOR WORMED GEARBOX, RACK & PINION
SPECIFICATION	
OPENING/CLOSING TIME	5 SECONDS PER METER (ADJUSTABLE)
CYCLES	100% DUTY RATING
SLOW DOWN	OPENING & CLOSING
DIMENSIONS	
MAX SPAN (MM)	6000
MAX HEIGHT (MM)	3500 (DEPENDENT ON SPAN)
SAFETY	
SAFETY EDGES	6X CAT 3 EDGES AS STANDARD
PHOTOCELLS	DUAL HEIGHT

**IMAGES:**



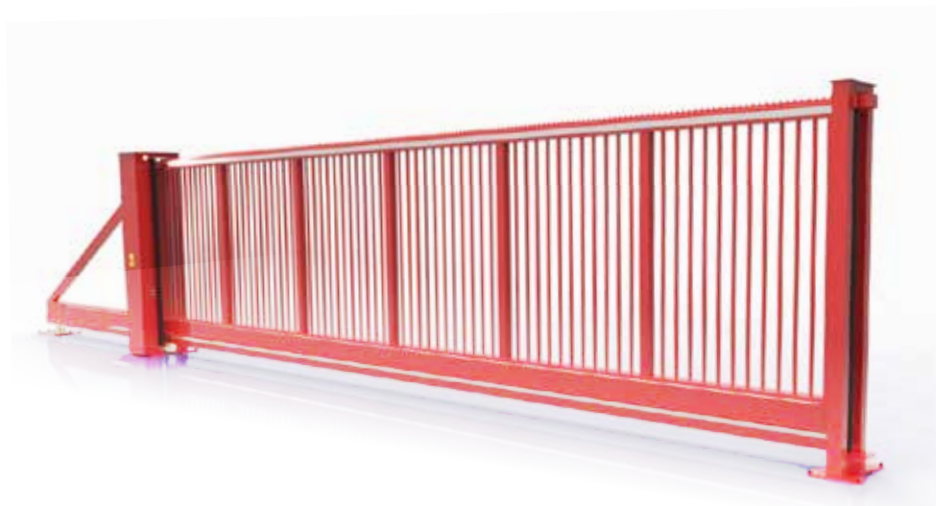

## ROLLING CENTER D5800 AUTOMATIC SLIDING GATE SYSTEM

**D5800** gates are a heavy duty version of our popular D5600 cantilevered automatic gates, and provide the optimum solutions for vehicle entrance control at high security locations or facilities which experience a high level of vehicle movements.

Gates are manufactured to suit customer's individual requirements and sizes up to 13m width and 3.5m height are available as fully automated or manually operated types. The infill design of gates can be modified to reflect the needs of individual projects.

Fully compliant safety systems are fitted as standard, including Cat 3 safety edges and twin photocells to maintain compliance with evolving legislation.

### AUTOMATIC SLIDING GATE SYSTEM

**D5800**

Heavy duty cantilever sliding gate up to 13m clear opening

### TECHNICAL INFO:

D5800 HEAVY DUTY AUTOMATIC SLIDING GATE	
ELECTRICAL DATA	
POWER SUPPLY	230VAC 50HZ 6A
DRIVE UNIT	3 PHASE MOTOR WORMED GEARBOX, RACK & PINION
SPECIFICATION	
OPENING/CLOSING TIME	5 SECONDS PER METER (ADJUSTABLE)
CYCLES	100% DUTY RATING
SLOW DOWN	OPENING & CLOSING
DIMENSIONS	
MAX SPAN (MM)	13000
MAX HEIGHT (MM)	3500 (DEPENDENT ON SPAN)
SAFETY	
SAFETY EDGES	6X CAT 3 EDGES AS STANDARD
PHOTOCELLS	DUAL HEIGHT

### IMAGES:



**CAN'T SEE WHAT  
YOU'RE LOOKING  
FOR?**

Our friendly team are here to help.  
Call us on **0113 201 6677** or email **Info@rollingcenter.co.uk**



**ROLLING CENTER  
D6000  
AUTOMATIC SWING  
GATE SYSTEM**

The **D6000** swing gates are strong, tough, reliable and offer high security for commercial/industrial sites. Manufactured from hollow box section allowing us to construct bespoke designs with many infill's also available. Using only high quality heavy duty hinges all our gates swing/operate very smooth and efficient.

The **D6000** manual versions have a vast range of locking facilities available from slide bolts to mortice locks.

The **D6000** automatic versions come with either underground operators or our **D380HD** above ground operators depending on the size and spec of the gates. All our automatic gates come with Cat 3 safety edges and dual Photocells as standard. The control panels can be connected to any access control such as prox-readers, radio control, networked PC's and GSM technology.

All our gates are also fully tested in house to minimise time on site to ensure minimum disruption.



**AUTOMATIC SWING GATE**

D6000

Automatic underground swing gates - up to 7m per leaf

**TECHNICAL INFO:**

	D6000 AUTOMATIC SWING GATE
ELECTRICAL DATA	D6000
POWER SUPPLY	230VAC 50HZ 6A
DRIVE UNIT	OPTIONS OF ABOVE GROUND OR UNDERGROUND AUTOMATION
SPECIFICATION	
OPENING/CLOSING TIME	6 - 20 SECONDS DEPENDING ON AUTOMATION
CYCLES	INTENSIVE USE - 100% DUTY RATING DEPENDING ON AUTOMATION
DIMENSIONS	
MAX SPAN (MM)	14000 (7000 PER LEAF)
MAX HEIGHT (MM)	5000 (DEPENDING ON SPAN)
SAFETY	
SAFETY EDGES	6X CAT 3 EDGES AS STANDARD
PHOTOCELLS	DUAL

**IMAGES:**



**ROLLING CENTER  
WHATSAPP  
TECHNICAL**

Scan the QR code for instant help





## ROLLING CENTER D4150 AUTOMATIC TURNSTILE SYSTEM

Designed to provide effective pedestrian access control to high traffic locations such as construction sites and factory entrances, the **D4150** turnstile is both attractive and economically priced.

These turnstiles have a solenoid operated mechanism mounted in the fully enclosed overhead structure, which allows the unit to be configured as bi-directional or single direction operation. The control system allows connection to any access control system or to a fire alarm to provide free rotation in the event of an alarm. The turnstile features a 120° three rotor design providing maximum space for pedestrian transit.

Access control reader mounting plates are also provided at no extra cost to both sides of the turnstile. The unit is powder coated for maximum longevity, and is available in a wide range of standard colours. For construction sites and temporary colours, we offer a steel base with fork lift pockets to allow turnstiles to be relocated.

### FULL HEIGHT TURNSTILE

D4150

230vac full height turnstile

### TECHNICAL INFO:

	FULL HEIGHT TURNSTILE
ELECTRICAL DATA	D4150
POWER SUPPLY	230VAC 50HZ
SPECIFICATION	
FINISH	PRIMED / POWDER COATED FINISH
CLEAR HEAD HEIGHT (MM)	2070
CLEAR WALKWAY WIDTH (MM)	600
ACCESS CONTROL CONFIGURATION	READER POST ON BOTH SIDES PROVIDED 120° 3 ARM ROTOR
DIMENSIONS	
UNIT	1520 X 1360 X 2230

### IMAGES:





ROLLING CENTER  
D4200  
AUTOMATIC TURNSTILE  
SYSTEM

The **D4200** is a well specified heavy duty turnstile at a competitive price. Designed for applications ranging from public access such as theme parks, and stadiums, to construction sites and secure area access control.

The turnstile features a 120° three rotor design providing maximum space for pedestrians transit. An overhead canopy is fitted as standard for full weather protection for users. Generously sized access control reader mounting pads are also provided at no extra cost.

The **D4200** has been designed to a higher specification than similarly priced turnstiles with a more rigid construction and large diameter rotors. The unit is powder coated for maximum rigidity, and is available in a wide range of standard colours.

For construction sites and temporary locations, we offer a steel base with fork lift pockets to allow turnstiles to be relocated as required.



FULL HEIGHT TURNSTILE

D4200

230vac enhanced automatic full height turnstile

TECHNICAL INFO:

	ENHANCED FULL HEIGHT TURNSTILE
ELECTRICAL DATA	D4200
POWER SUPPLY	230VAC 50HZ
SPECIFICATION	
FINISH	PRIMED / POWDER COATED FINISH
CLEAR HEAD HEIGHT (MM)	2070
CLEAR WALKWAY WIDTH (MM)	600
ACCESS CONTROL	READER POST ON BOTH SIDES PROVIDED
CONFIGURATION	120° 3 ARM ROTOR
DIMENSIONS	
UNIT	1520 X 1360 X 2230

IMAGES:







## ROLLING CENTER D210 ACCESS READER POST SYSTEMS

Our standard **D210** post is manufactured from mild steel with a powder coated finish. It has a removable mounting plate of 290mm x 190mm with a head depth of 175mm. The standard height is 1255mm with a dual height or HGV only version of 2500mm overall height.

Posts can be manufactured to suit any size of access control equipment and we are also able to offer a coin acceptor version with lockable hinged panel for access to your coin tray. For sites which require the highest levels of aesthetic appeal we produce stylish brushed stainless steel posts which incorporate traffic lights or access controls into a recessed plate.

Standard height 1255mm. Dual height or HGV only available with height of 2500mm

Manufactured to any size to suit access control equipment. Coin acceptor version with lockable hinge panel can be added.

### ACCESS READER POST

D210

Bespoke access reader post

### TECHNICAL INFO:

	D210 ACCESS READER POST	
DIMENSIONS	SINGLE HEIGHT	DUAL HEIGHT
HEIGHT (MM)	1255	2500
POST (MM)	80 X 80 X 3	
BASE PLATE (MM)	5	
HEAD SIZE (MM)	300 X 200 X 175	
READER HEAD OPTIONS		
TYPE 1 (MM)	300 X 200 X 175	
TYPE 2 (MM)	300 X 300 X 175	
TYPE 3 (MM)	400 X 350 X 175	
MOUNTING PLATE (MM)	290 X 190	
FINISH (MM)	GALVANISED OR POWDER COATED	

### IMAGES:



**NEED ASSISTANCE  
WITH CHOOSING  
THE RIGHT KIT?**

Call us on  
**0113 201 6677** our friendly  
team are here to help.







TEL. 0113 201 6677  
FAX. 0113 201 6688  
**INFO@ROLLINGCENTER.CO.UK**  
**WWW.ROLLINGCENTER.CO.UK**

**Rolling Center UK Ltd**  
Unit 6, Whitehall Cross  
Leeds  
LS12 5XE