




Be ahead

DAMPY B




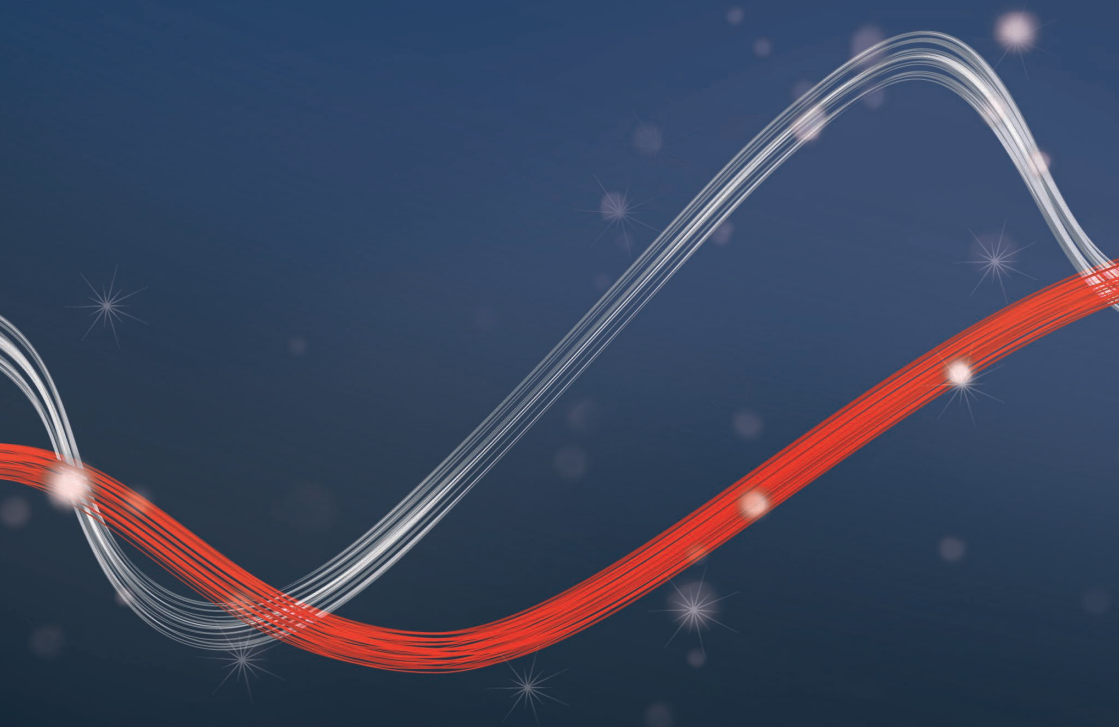


DAMPY B



Semi-automatic bollards with gas springs



	DAMPY B 115/500	DAMPY B 115/500 I	DAMPY B 219/500	DAMPY B 219/500 I	DAMPY B 219/500 L	DAMPY B 219/500 LI	DAMPY B 219/700	DAMPY B 219/700 I	DAMPY B 219/700 L	DAMPY B 219/700 LI
Rod height	500 mm						700 mm			
Rod diameter	115		220							
Rod thickness	4 mm		6 mm							
Rod treatment	cataphoresis	stainless steel	cataphoresis	stainless steel			cataphoresis	Stainless steel	cataphoresis	Stainless steel
Rod movement	Internal gas spring									
Impact resistance	5000 J		10000 J							
Break-in proof	30000 J		60000 J							
Rod locking	with triangle key									

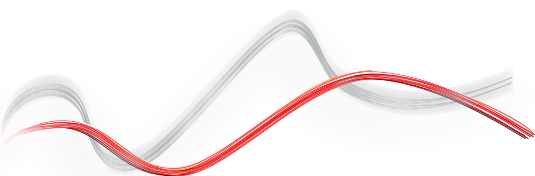

North branch - 0161 456 0456
South branch - 01488 674 750

info@bft.co.uk
www.bftautomationuk.com