


SPS-LD-1-24V

Power Supply:	AC 110/220V±10% 50/60Hz; DC 12/24V (Optional: Please check the body label for details.)
Sensitivity:	Adjustable in 4 levels
Working Frequency:	20KHz - 170KHz
Response Time:	10ms
Working Temp.:	-20°C ~+65°C
Humidity:	95% or less (non-condensing)
Presence Mode:	Unlimited presence/ Limited presence: 500ms
Max. Loop Size:	8M x 1M
Output Mode:	Relay
Feeder Length:	With 10M (twisted, a Min. of 20 twists per meter.)

PRODUCT CONSTRUCTION DRAWINGS

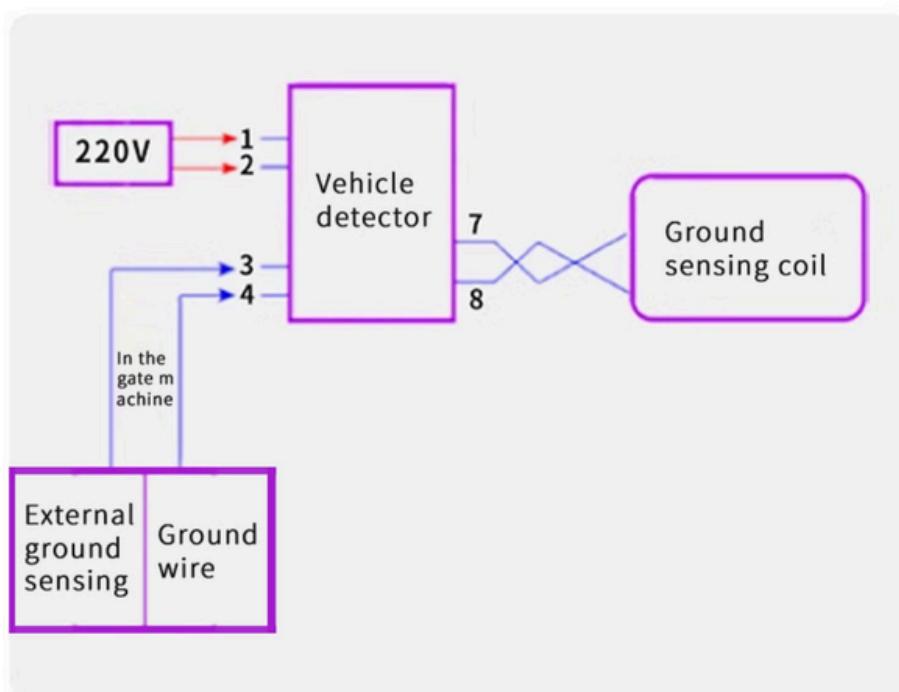

LOOP CABLE REFERENCE DIAGRAM

