

SELECTPRO WELD-IN DEADLOCK



- Universal Handing
- 2-Year Warranty
- Keyed Both Sides
- Adjustable Deadbolt

Suitable for metal gate frames.

- INCLUDED IN THE BOX**
- 1x3mm hex key
 - M5 fixing bolts
 - Deadbolt
 - Keep plate (self-drilling fasteners)
 - A set of keys (3)



Achieve robust security for metal gates with this solid weld-in deadlock. This weld-in deadlock is the ideal choice for those seeking strength, adaptability, and secure gate locking. Featuring a single keyed deadlocking action, the lock extends the deadbolt 20mm with just one turn of the key, providing reliable protection for your gates.

Product code	Description
SWD1630	For 30mm (1- 1/8") wide gate frames
SWD1640	For 40mm (1- 5/8") wide gate frames
SWD1650	For 50mm (2") wide gate frames
SWD1660	For 60mm (2- 3/8") wide gate frames



WHAT DOES DEADLOCK MEAN?

Lock Type	What happens when the gate closes?	What do I need to do next to lock the gate?	Best for:
Deadlock	Nothing latches or locks when the gate closes	Use the key to lock the gate	Best when the gate should only lock when deliberately keyed.


TECHNICAL SPECIFICATIONS

Lock type	Keyed gate lock
Handing	Universal
Latchbolt throw	20mm (3/4")
Lock case width	98mm (3-3/4")
Fixing method	Weld-in
Fixings included	Yes
Warranty	2 years
Compatible Keeps	BSKG

HELP & SUPPORT

- UK: +44 1243 558580 US: +1 214 872 9687
- www.gatemasterlocks.com support@gatemasterlocks.com

1. Disassemble the lock by removing the 3 screws from the face plate of the lock, remove the face plate, and then remove the euro cylinder (twist the key 15 degrees clockwise or anti-clockwise to release). The insides of the lock will then slide out.
2. Weld the lockcase to the gate and galvanise or paint as part of the gate.
3. Fit the lock and eurocylinder into the lockcase and secure with screws.

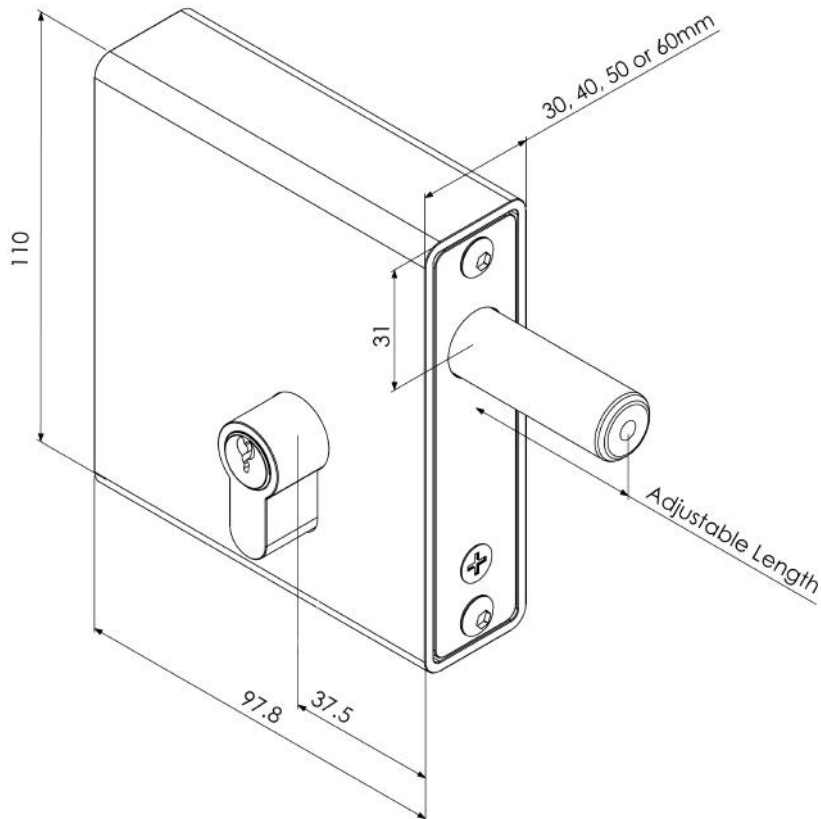

MAINTENANCE

Every 2 months:

Lubricate the latchbolt with light oil.

Annually:

Dismantle the lock and spray mechanism with light oil.

To help improve gate security and overall performance, The SelectPro can be paired with a range of Gatemaster products. These options are designed to work alongside your gate lock, helping create a stronger, safer and more complete gate installation.



Superlock Gapless Keep (BSK)

- Slim profile enables a small gap between gate and post.
- Simple and easy to fit to a wide range of applications.
- Incorporates two rubber bump stops to ensure the gate makes minimal noise when shutting.
- Improves gate appearance as the narrow profile blends in well with the gate.
- Expanding fasteners supplied with the keep.



Superhinge (SH)

- Tested for over 500,000 gate openings without any sign of wear, equating to approximately 50 years of daily use at 25 gate openings per day.
- Capable of supporting gates weighing up to 900kg.
- Ideal for both automated and manual gates.
- Available in multiple sizes with adjustable installation options and corner-lug variations.



Hydraulic Gate Closer (APS)

- Provides safe, reliable gate closing using a proven hydraulic mechanism, ideal for schools, playgrounds, and other applications where adjustable closing speed is essential.
- Designed to support gates up to 150kg.
- Available with either a standard top hinge or an integrated 90° stop, offering a durable, unobtrusive, and maintenance-free solution.
- Requires no power.