

SELECTPRO WELD-IN LONG THROW KEYLATCH



- Universal Handing
- 2-Year Warranty
- Keyed Both Sides
- Adjustable Latchbolt

Suitable for metal gate frames. Handles sold separately.

INCLUDED IN THE BOX

- 1x3mm hex key
- M5 fixing bolts
- Latchbolt
- Keep plate (self-drilling fasteners)
- A set of keys (3)



Ensure dependable security with the SelectPro Long Throw Keylock. The SelectPro Long Throw Keylock is the perfect choice for gates that require secure locking when the gate is closed shut. Designed to automatically lock when the gate is pulled closed, this key-operated latch is ideal for communal gates, ensuring they are securely locked every time they are shut.

| Product code | Description                         |
|--------------|-------------------------------------|
| SWKLLT1630   | For 30mm (1- 1/8") wide gate frames |
| SWKLLT1640   | For 40mm (1- 5/8") wide gate frames |
| SWKLLT1650   | For 50mm (2") wide gate frames      |
| SWKLLT1660   | For 60mm (2- 3/8") wide gate frames |



WHAT DOES DEADLOCK MEAN?

| Lock Type | What happens when the gate closes?           | What do I need to do next to lock the gate? | Best for:                                                                                                                       |
|-----------|----------------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Keylatch  | Latches shut automatically, but doesn't lock | Use the key if you want to lock the gate    | Best for convenience, when you want the gate to catch and open conveniently with the handle, then choose when to fully lock it. |

TECHNICAL SPECIFICATIONS

|                    |                                                                                                        |
|--------------------|--------------------------------------------------------------------------------------------------------|
| Lock type          | Keyed gate lock                                                                                        |
| Handing            | Universal                                                                                              |
| Latchbolt throw    | 20mm (3/4")                                                                                            |
| Lock case width    | 98mm (3-3/4")                                                                                          |
| Fixing method      | Weld-in                                                                                                |
| Fixings included   | Yes                                                                                                    |
| Warranty           | 2 years                                                                                                |
| Compatible Keeps   | BSKG                                                                                                   |
| Compatible Handles | Alloy handle (AH), Profiled handle (PH) & Traditional handle (TDH)<br><i>*Handles sold separately*</i> |

HELP & SUPPORT



UK: +44 1243 558580

US: +1 214 872 9687




www.gatemasterlocks.com



support@gatemasterlocks.com

1. Disassemble the lock by removing the 3 screws from the face plate of the lock, remove the face plate, and then remove the euro cylinder (twist the key 15 degrees clockwise or anti-clockwise to release). The insides of the lock will then slide out.
2. Weld the lockcase to the gate and galvanise or paint as part of the gate.
3. Fit the lock and eurocylinder into the lockcase and secure with screws.

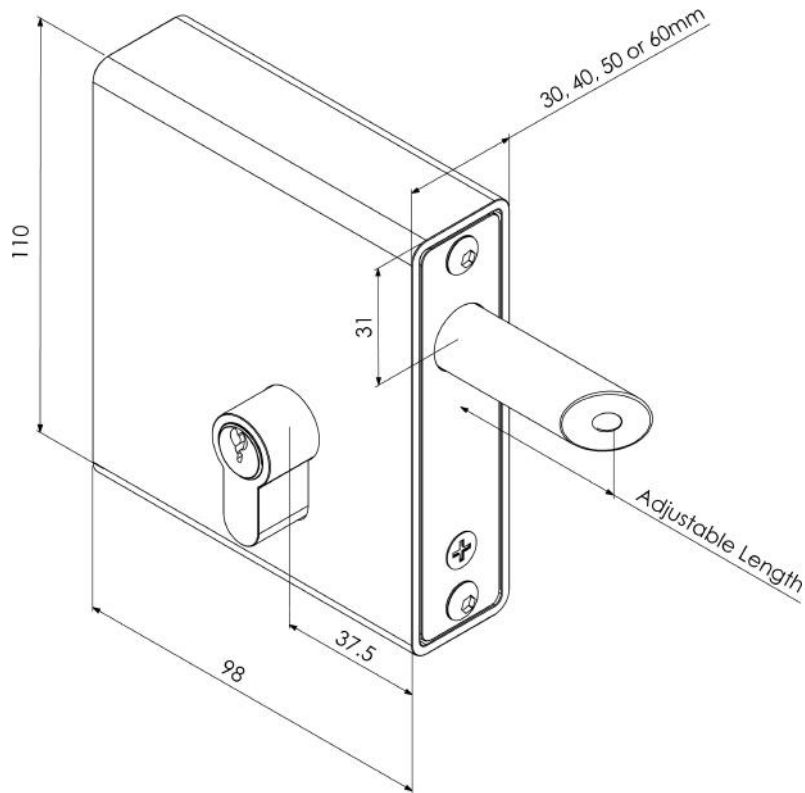

## MAINTENANCE

### Every 2 months:

Lubricate the latchbolt with light oil.

### Annually:

Dismantle the lock and spray mechanism with light oil.

To help improve gate security and overall performance, The SelectPro can be paired with a range of Gatemaster products. These options are designed to work alongside your gate lock, helping create a stronger, safer and more complete gate installation.



### Superlock Gapless Keep (BSK)

- Slim profile enables a small gap between gate and post.
- Simple and easy to fit to a wide range of applications.
- Incorporates two rubber bump stops to ensure the gate makes minimal noise when shutting.
- Improves gate appearance as the narrow profile blends in well with the gate.
- Expanding fasteners supplied with the keep.



### Superhinge (SH)

- Tested for over 500,000 gate openings without any sign of wear, equating to approximately 50 years of daily use at 25 gate openings per day.
- Capable of supporting gates weighing up to 900kg.
- Ideal for both automated and manual gates.
- Available in multiple sizes with adjustable installation options and corner-lug variations.



### Hydraulic Gate Closer (APS)

- Provides safe, reliable gate closing using a proven hydraulic mechanism, ideal for schools, playgrounds, and other applications where adjustable closing speed is essential.
- Designed to support gates up to 150kg.
- Available with either a standard top hinge or an integrated 90° stop, offering a durable, unobtrusive, and maintenance-free solution.
- Requires no power.