

SELECTPRO WELD-IN LATCH DEADLOCK



- Universal Handing
- 2-Year Warranty
- Keyed Both Sides
- Adjustable Latchbolt

Suitable for metal gate frames. Handles sold separately.

INCLUDED IN THE BOX

- 1x3mm hex key
- M5 fixing bolts
- Latchbolt
- Keep plate (self-drilling fasteners)
- A set of keys (3)



This weld-in latch deadlock is ideal for those seeking a robust, secure lock with a latch deadlock. Featuring both a latch and a deadlock on a single bolt, this SelectPro gate lock, offers a seamless solution for security on metal gates. Operate the latch with the handles, and turn the key to extend the deadlock 30mm into the gate post for added security.

Product code	Description
SWLD1630	For 30mm (1- 1/8") wide gate frames
SWLD1640	For 40mm (1- 5/8") wide gate frames
SWLD1650	For 50mm (2") wide gate frames
SWLD1660	For 60mm (2- 3/8") wide gate frames



WHAT DOES DEADLOCK MEAN?

Lock Type	What happens when the gate closes?	What do I need to do next to lock the gate?	Best for:
Latch Deadlock	Latches shut automatically, but doesn't lock	Use the key if you want to lock the gate	Best for convenience, when you want the gate to catch and open conveniently with the handle, then choose when to fully lock it.

TECHNICAL SPECIFICATIONS


Lock type	Keyed gate lock
Handing	Universal
Latchbolt throw	20mm (3/4")
Lock case width	98mm (3-3/4")
Fixing method	Weld-in
Fixings included	Yes
Warranty	2 years
Compatible Keeps	BSKG
Compatible Handles	Alloy handle (AH), Profiled handle (PH) & Traditional handle (TDH) <i>*Handles sold separately*</i>

HELP & SUPPORT

UK: +44 1243 558580 US: +1 214 872 9687

www.gatemasterlocks.com support@gatemasterlocks.com

1. Disassemble the lock by removing the 3 screws from the face plate of the lock, remove the face plate, and then remove the euro cylinder (twist the key 15 degrees clockwise or anti-clockwise to release). The insides of the lock will then slide out.
2. Weld the lockcase to the gate and galvanise or paint as part of the gate.
3. Fit the lock and eurocylinder into the lockcase and secure with screws.

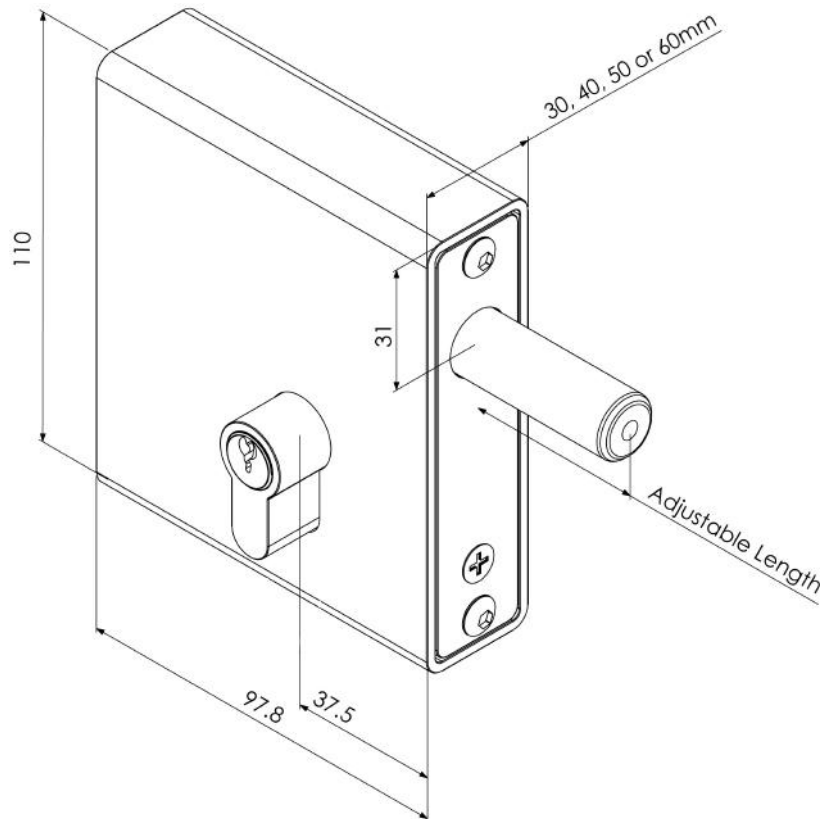

MAINTENANCE

Every 2 months:

Lubricate the latchbolt with light oil.

Annually:

Dismantle the lock and spray mechanism with light oil.

To help improve gate security and overall performance, The SelectPro can be paired with a range of Gatemaster products. These options are designed to work alongside your gate lock, helping create a stronger, safer and more complete gate installation.

Handles

Alloy Gate Handle (AH)

Profiled Gate Handle (PH)

Traditional Gate Handle (TDH)



Superlock Gapless Keep (BSK)

- Slim profile enables a small gap between gate and post.
- Simple and easy to fit to a wide range of applications.
- Incorporates two rubber bump stops to ensure the gate makes minimal noise when shutting.
- Improves gate appearance as the narrow profile blends in well with the gate.
- Expanding fasteners supplied with the keep.



Superhinge (SH)

- Tested for over 500,000 gate openings without any sign of wear, equating to approximately 50 years of daily use at 25 gate openings per day.
- Capable of supporting gates weighing up to 900kg.
- Ideal for both automated and manual gates.
- Available in multiple sizes with adjustable installation options and corner-lug variations.