

'GLOBAL CONTROL OF ANY DEVICE BY AUTHORISED PHONES'

Introducing the GSW2 Universal GSM Switch...

Authorised Users simply dial the SIM card in the GSW2 'FREE OF CHARGE' to switch just about anything



Electric Gates & Barriers
Garage Doors & Shutters
Intercom & Door Entry
Car Park Access
Visitor Access
Self Storage Access
Security & Flood Lights
Hire & Facility Management
Alarm Monitoring & Control
Fire Fault Alarm SMS
Remote Server Reset
Start Pumps & Generators
Heating & Air Con

TYPICAL APPLICATIONS

→ Simple GSM Gate Opener

→ GSM Switch / Opener w / Event Log

→ GSM Switch / Opener w / Events & Intercom

AVAILABLE IN 3 VERSIONS...

12-24V AC or DC input supply
Free call & Text activation of outputs
1 x Configurable relay output N/O or N/C
1 x 12VDC open collector output (500mA)
200 Authorised Users or Open Access
2 inputs: press to exit & text alerts
Simple PC & Text programming
Unique text prompt for current settings
Unauthorised Caller alert by Text
Multi-function LED inc. signal strength
Optional GSM intercom call point
Event log by Text or PC

MAIN FEATURES

LOW COST, SIMPLE & RELIABLE... REMOTE CONTROL HAS EVOLVED!



GSW2 V1.0 - QUICK START GUIDE

Introduction...

- Thanks for choosing GSW2 'the future of remote control is your hands'
- This guide is intended to get you going quickly and doesn't go into the features of the device
- If you want more security or control features refer to the [Other Manuals](#)


Click the following Heading links to view that section of the guide

1. GSW2 CONTROLLER OVERVIEW	1
Connections Explained...	1
2. GETTING STARTED QUICKLY	2
FIRSTLY... Check you have the correct parts & tools before you start.....	2
i) Make the Minimum Connections.....	2
ii) Inserting the SIM card	3
iii) Power Up & Check the LED Status Indicators.....	3
iv) Call the SIM card in GSW2 from any Phone to Test...	3
3. LED DISPLAY	4
1. BLUE GSM Network Signal Strength (1 Flash = Low Signal / 5 Flashes = Maximum Signal)	4
2. RED Device / Connection / Network Fault	4
3. YELLOW GSM Network (1 Flash/sec. = Registering & 1 Flash per 5 sec. = On Network)	4
4. TROUBLESHOOTING.....	4
a) GSW2 won't connect to the GSM network	4
b) GSW2 won't respond and blue LED is solid	5
c) Red LED is solid	5
d) Red LED is Flashing	5
e) If your issue is not listed here	5

GSW2 CONTROLLER OVERVIEW

Connections Explained...

- Output 2 (GND): Auxiliary output for switching low power devices
- Output 2 (+12V): Auxiliary output for switching low power devices
- *GND: Constant GND for Input Activation & powering GSM intercom call point
- +12VDC: Constant 12VDC for powering GSM intercom call point
- Call Point Connections: Audio terminals to the GSM intercom call point
- Port for External GSM Antenna: Connect an optional high strength antenna
- LED Display: See the start up, GSM signal strength & Network
- USB Port: This is an Installer programming port - End User Software available soon

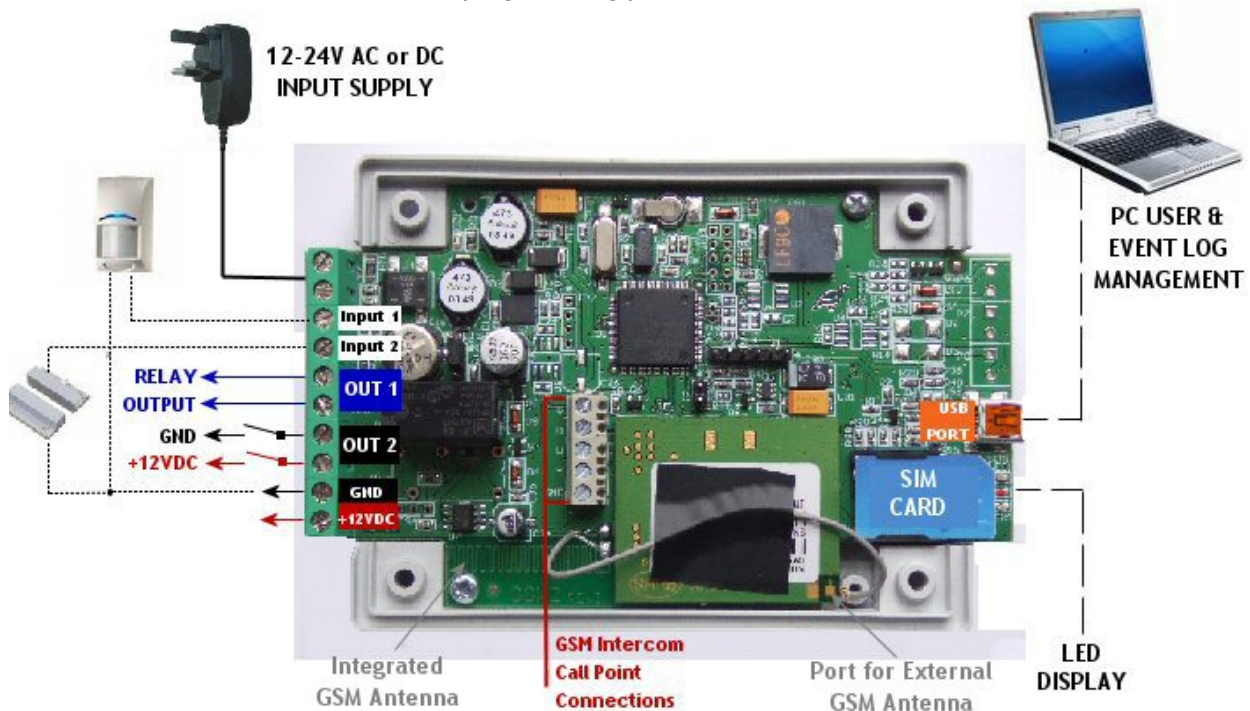


GETTING STARTED QUICKLY

FIRSTLY... Check you have the correct parts & tools before you start

- 1 x GSW2 GSM Controller
- 1 x Power supply (500Ma minimum)
- 1 x Activated SIM Card & associated phone number
- Half a metre of multi-core alarm / security cable (Maplins)
- Terminal Screwdriver & small wire stripper/cutter

i) Make the Minimum Connections

- Connect Output 1 (relay) & Output 1 (relay) terminals across the switch terminals which

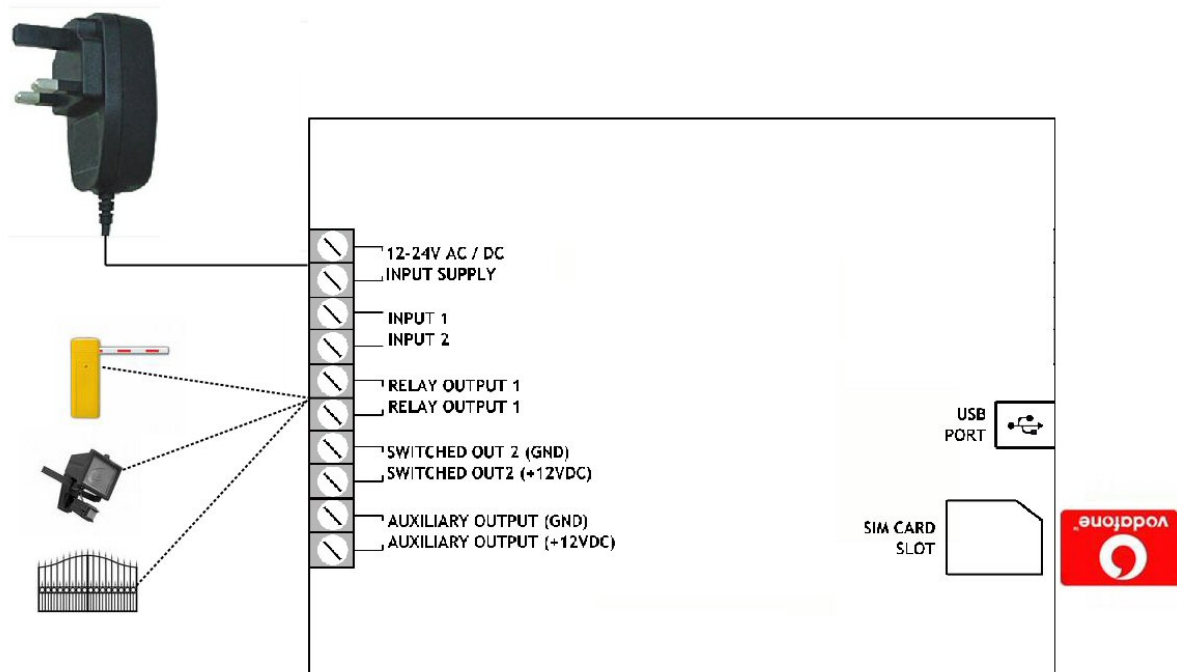

ii) Inserting the SIM card

Insert the SIM card gold contacts down with the cut off corner to the top RHS as shown on the lid diagram. If using an O2 UK PAYT SIM card, send this text message from any phone to the O2 SIM card first before sending any other: **;+SPO=10;**

iii) Power Up & Check the LED Status Indicators

Switch on the power supply. The LED's flash in a particular way while starting up and then change when GSW2 is ready for use. Check that the LED's conform to the following table:

LED	STATUS (FLASHING)
BLUE (START UP)	SOLID
YELLOW (START UP)	FLASHES ONCE PER SECOND
RED (START UP)	FLASHES WHILE READING SIM CARD ONLY
BLUE (READY)	FLASHES TO INDICATE SIGNAL (1 LOW - 5 MAX.)
YELLOW (READY)	FLASHES ONCE PER 5 SECONDS
RED (READY)	OFF

To add more Security Features & Authorised Callers, check the [other manuals here](#)

Note: If using an O2 UK PAYT SIM card, send this text message first before any other: **;+SPO=10;**

LED DISPLAY

The LED's are to indicate what is happening on the device at any given time.

1. **BLUE** GSM Network Signal Strength (1 Flash = Low Signal / 5 Flashes = Maximum Signal)

If the Blue is on solid, the device is not connected to the network. You will find that red is also on or flashing on/off. This indicates something is not right with the network and could be antenna, or Sim card related.

2. **RED** Device / Connection / Network Fault

Red will flash during start up to indicate the processor is reading the SIM card. It will also flash if the device is erasing data when prompted. It should not be on at all during normal operation. If the Red is solid or flashing at any time other than the initial 30 - 60 seconds after power up while the device logs onto the network; you have a fault somewhere.

Red indicates something is not right in general and could be to do with the network, antenna, SIM card, connections or hardware damage. Check carefully starting with your wiring connections. Then try the device in a different 'open air' location. Failing that try a differnt network SIM card. Visually inspect the hardware and look for any obvious damage or foreign objects on the PCB.

3. **YELLOW** GSM Network (1 Flash/sec. = Registering & 1 Flash per 5 sec. = On Network)

The Yellow is only related to the Network initial registration & then reporting that the device is currently on the network. If the Yellow is not flashing once every 5 seconds, it is not on the GSM Network.

TROUBLESHOOTING

Check the status of the LED's first and check the LED descriptions to provide a general idea of what to look at first.

a) GSW2 won't connect to the GSM network

- Move the GSW2 to another location

b) GSW2 won't respond and blue LED is solid

- GSM Network Signal issue
- SIM card not inserted correctly
- Try different SIM card
- Check antenna connection
- Make sure antenna is not inside a metal enclosure

c) Red LED is solid

- Check connections and polarity on GSM controller & intercom interface PCB
- Check PCB components visually to locate obvious damage
- Check power supply input voltage is sufficient

d) Red LED is Flashing

- Fit external antenna
- Relocate controller
- Change Network SIM card

e) If your issue is not listed here

- Contact your Supplier for Support