

MAGNETIC FIELD VEHICLE DETECTOR


MODEL - MD102 PROBE & MD102C CONTROLLER

The MD102 is a magnetic resistive probe which is used to measure the earth's magnetic field. Any change in the magnetic field due to the presence of a vehicle will be detected resulting in a signal output.

The probe can measure the magnetic field in 3 axis, namely the X, Y, and Z axis. Each axis can be individually enabled to optimise vehicle detection. Normally all 3 axis would be enabled.

The MD102 probe can be buried in the road surface underneath the vehicle, alongside the vehicle or can be mounted above the ground next to the passage of the vehicle.

The probe can be used to produce a pulse output or a presence out. The presence out will detect the vehicle indefinitely.

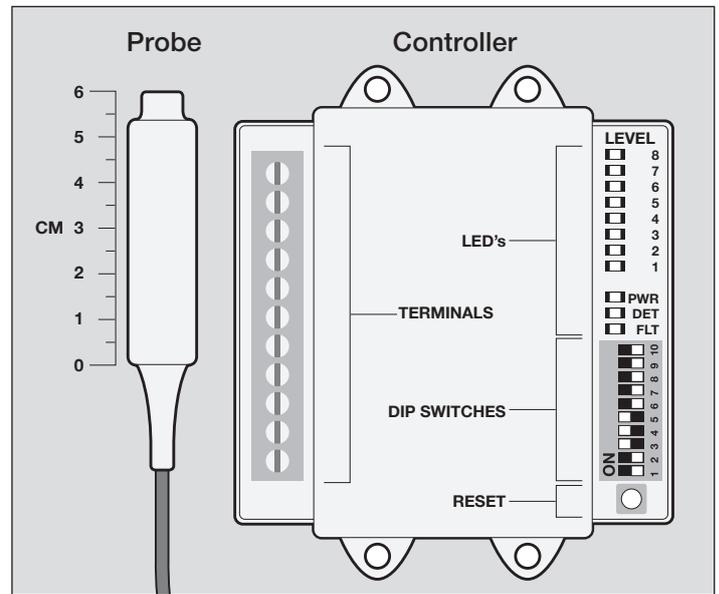

The MD102C is a control unit which enables configuration and testing of the MD102. DIP switches are used for configuration and LED's are used for visual indications of the operation of the probe. A relay output switches ON when a vehicle is detected.

The MD102 has been designed for parking and access control applications and is a cost effective solution for detecting vehicles in order to facilitate the automatic opening of security gates. It requires a minimal amount of cutting in the road surface.

Features

Reset switch. Pressing the reset switch enables the MD102 probe to be manually reset during commissioning and testing. This results in the probe adjusting to the environment and becoming ready for vehicle detection. The switch settings are also used to update the probe. The probe stores these settings in non-volatile memory so that the MD102 probe can be used without the controller connected. The button must be pressed until the fault indicator comes ON.

Switch selectable sensitivity. The detect sensitivity is the minimum change in magnetic field required to produce a detect output. Four sensitivity settings are available on the switches to allow flexibility in configuration.

X, Y & Z axis enable. This feature enables the three axis. The output values from the axis are averaged to give a combined output. For normal use all of the axis should be enabled.

Filter option. This option is used to provide a delay of 2 seconds between detection of the vehicle and switching of the output relay. This delay is normally used to prevent false detection of small or fast moving objects.

Relay mode. This switch configures the relay to operate in presence or pulse mode.

Pulse relay selection. The pulse relay may be configured to energise on detection of a vehicle or to energise when the vehicle leaves the loop.

Detect on stop. This feature will only activate the presense relay output once the vehicle has stopped moving.

5 minute presence. This feature will reset the detector after a 5 minute timeout.

Indicators

1. Power indicator. This LED Indicator illuminates when power is present.

2. Detect indicator. This LED Indicator illuminates when there is a vehicle present.

3. Fault indicator. This LED Indicator illuminates when there is a problem with the probe.

4. Output level indicator. There are 8 LED's which are used to show the amount of the magnetic field has changed. This is mainly used for the initial setup of the probe.

MD102C CONTROLLER

TECHNICAL SPECIFICATIONS

Power supply	MD102C 12 - 24V AC/DC 50/60Hz 30mA
Presence/Pulse relay	Change over contact 0.5A/220VAC
Response time	Approximately 100ms after vehicle enters loop
Indicators	LED indicators show, Detect state and probe Fault.
Connector	11 Way Screw terminal block.
Dimensions	105mm X 90mm X 22mm
Operating temperature	-20°C to +70°C
Storage temperature	-40°C to +85°C

WIRING CONNECTIONS

Screw Terminal	Description	Probe Cable Details
1	Power supply +V	
2	Power supply 0V	
3	Relay normally closed N/O	
4	Relay common COM	
5	Relay normally open N/C	
6	Link - Probe open collector	
7	Link - Probe open collector	White
8	RS485	Red
9	RS485	Green
10	Probe power +V	Brown
11	Probe power 0V	Blue

SWITCH SETTINGS

Switch No.	Function	ON	OFF
10	5 minute presence	On	Off
9	Detect on shop	On	Off
8	Relay mode	Pulse	Presence
7	Pulse mode	Undetect	Detect
6	Filter	2 Second	Off
5	X-Axis enable	On	Off
4	Y-Axis enable	On	Off
3	Z-Axis enable	On	Off
1,2	Sensitivity High	-	S1 / S2
1,2	Sensitivity Medium High	S2	S1
1,2	Sensitivity Medium Low	S1	S2
1,2	Sensitivity Low	S1 / S2	-

ORDER CODES

Order code	Description
MD102C	MD102 Controller unit
MD102-15	MD102 Magnetic probe - 15m cable
MD102-30	MD102 Magnetic probe - 30m cable

MD102 Probe

TECHNICAL SPECIFICATIONS

Power supply	MD102 12 - 24 VDC 10mA
Presence/Pulse output	Open Collector transistor output
Response time	Approximately 100ms after vehicle enters loop
Sensing distance	The probe should be placed less than 1.5m from the side of the vehicle or in the ground under the vehicle
Environmental tracking	Automatic compensation
Cable	Cable length 5m, 10m, 15m, 30m. 5 Core + Earth Screen
Dimensions	80mm X 18mm X 6mm
Operating temperature	-20°C to +70°C
Storage temperature	-40°C to +85°C

WIRING CONNECTIONS

Description	Probe Cable Details
Earth probe	Connect to earth at controller end
Probe open collector (switches load to 0V)	White
RS485 - Not normally used	Red
RS485 - Not normally used	Green
Probe power +V	Brown
Probe power 0V	Blue

INSTALLATIONS

The MD102 magnetic probe can be installed anywhere close to the travel of the vehicle. Best detection results are obtained when the probe is mounted underneath and as close to the vehicle as possible. The probe can be mounted in any orientation.

1. Mounted on a pole alongside the passage of the vehicle
2. Buried in the ground alongside the passage of the vehicle.
3. Buried in the road beneath the vehicle.

Whichever method is used, it is very important that the probe does not move during normal operation. Any movement will result in the probe giving a false detection output. If the probe is mounted in the ground beneath the vehicle, it is important to ensure that the tyres going over the probe do not put any downward pressure on the probe because this will result in the movement of the probe and a false detection. When the slot above the probe is filled in, ensure that the fill material is concave so that it does not come into contact with the tyre of the vehicle.

The cable is designed for direct burial, however it is recommended that it is placed in a conduit for extra protection. The cable can be cut shorter if the MD102C controller is installed close to the probe.

DIAGNOSTICS

SYMPTOM	POSSIBLE CASE	SOLUTION
THE POWER LED is not on.	No power supply voltage on the input.	Check that the power supply is correctly wired to the controller. (Terminals 1 and 2)
The FAULT LED stays on.	There may be a poor connection in the wiring to the probe.	Check all wiring. Tighten screw terminals. Check for broken wires.
The DETECT LED stays on.	Local environmental change.	Re-calibrate the probe by pressing the reset button.